

DIPC-B6108.2.63.250423

## Release Notes

Zhejiang Uniview Technologies Co., Ltd

# DIPC-B6108.2.63.250423

## Release Notes

**Keywords:** Version information, version upgrade

**Abstract:** This document provides detailed version information and upgrade procedure for DIPC-B6108.2.63.250423.

**Acronym:**

Acronym	Full Name
IPC	IP Camera

# Content

<b>1 Version Information</b>	<b>3</b>
1.1 Version Number	3
1.2 Release History	3
1.3 Version Mapping Table	3
<b>2 Feature Change Description</b>	<b>3</b>
<b>3 Version Upgrade Description</b>	<b>4</b>
<b>4 Version Upgrade Procedure</b>	<b>4</b>
4.1 Upgrade Overview	4
4.1.1 Version Upgrade Environment	5
4.1.2 Version Upgrade Modes	5
4.2 Upgrade Procedure	5
4.2.1 Upgrade Through the Web	5
<b>5 Version Upgrade Disclaimer</b>	<b>6</b>

# 1 Version Information

## 1.1 Version Number

DIPC-B6108.2.63.250423

## 1.2 Release History

Table1 Released versions

Version No.	Basic Version No.	Released On	Remarks
DIPC-B6108.2.63.250423	DIPC-B6108.2.3.240926	2025-04-24	Improve release

Table2 Version mapping table

Product Mapping Item	Version No. (For External)
NVR	B3772.33.72.240122

## 1.3 Version Mapping Table

Table3 Product models and corresponding versions

Product Series	IPC Series
Series	<b>IPC2128LE、IPC328LE、IPC3618LE、IPC2128LB、IPC3618LB</b>
Models	<b>IPC2128LE series:</b> IPC2128LE-ADF28KM-H、IPC2128LE-ADF40KM-H、 IPC2128LE-ADF28KMC-DL、IPC2128LE-ADF40KMC-DL <b>IPC328LE series:</b> IPC328LE-ADF28K-H、IPC328LE-ADF40K-H <b>IPC3618LE series:</b> IPC3618LE-ADF28K-H、IPC3618LE-ADF40K-H、 IPC3618LE-ADF28KC-DL、IPC3618LE-ADF40KC-DL <b>IPC2128LB series:</b> IPC2128LB-ADF28K-DL、IPC2128LB-ADF28KM-DL、IPC2128LB-ADF40K-DL、 IPC2128LB-ADF40KM-DL <b>IPC3618LB series:</b> IPC3618LB-ADF28K-DL、IPC3618LB-ADF28KM-DL
Target file name	DIPC-B6108.2.63.250423.zip

# 2 Feature Change Description

SP03D2406(DIPC-B6108.2.3.240926):

Item	Feature	Description
Newly added features	Storage	<ol style="list-style-type: none"> <li>1. Formatting SD card does not require the device to restart.</li> <li>2. The displayed storage unit is changed from MB to GB.</li> <li>3. Improved the image page: Shows the photo type, name, size, time, and a preview button; allows user to search images by image type and time, allows user to export images.</li> <li>4. The playback page added the function to search alarm recordings; alarm recordings appear red on the timeline.</li> </ol>
	Added the Area White Balance mode	<ol style="list-style-type: none"> <li>1. Added the Area White Balance mode on Image &gt; White Balance.</li> <li>2. When Area White Balance is selected, a blue rectangular frame appears on the live video image. User can drag the frame to the desired position to perform white balance correction to the selected area.</li> </ol>
Improved features	Changed dual-light policy	<p>When dual-light is enabled at night:</p> <ol style="list-style-type: none"> <li>1. For alarms that can be cleared (Intrusion Detection, Human Body Detection, UMD), the light turns off 10 seconds after the last alarm is cleared</li> <li>2. For alarms that cannot be cleared (Cross Line Detection, Enter Area, Leave Area), the light turns off after 10 seconds.</li> </ol>
Deleted features	None	None

### 3 Version Upgrade Description

None.


### 4 Version Upgrade Procedure

#### 4.1 Upgrade Overview

## 4.1.1 Version Upgrade Environment

### 1. Network Architecture for Upgrade

Figure1Network architecture

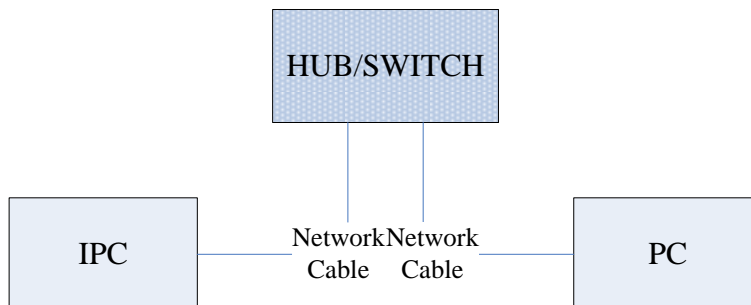

As shown in this figure, the version files are stored on the PC that is connected to the IPCs through the network.

## 4.1.2 Version Upgrade Modes

You can upgrade through the Web.

## 4.2 Upgrade Procedure

### 4.2.1 Upgrade Through the Web

- (1) Log in to the Web interface as **admin** (default password: 123456).
- (2) Click **Setup>Maintenance>Device Maintenance**. The **Device Maintenance** page is displayed.

<b>Firmware Upgrade</b>	
Upgrade File	<input type="text"/> <input type="button" value="Browse..."/> <input type="button" value="Upgrade"/> <input type="checkbox"/> Upgrade Boot Program
<b>Device Restart</b>	
<input type="button" value="Restart"/>	Restart the device.
<input type="checkbox"/> Enable Auto Restart	<input type="text" value="Each Day"/> <input type="button" value="v"/> <input type="text" value="02:00:00"/> <input type="button" value="OK"/>
<b>Config Management</b>	
<input type="button" value="Default"/>	Keep current network and user settings and restore other settings to defaults.
Importing	<input type="text"/> <input type="button" value="Browse..."/> <input type="button" value="Import"/>
Exporting	<input type="text" value="C:\Users\Desktop\lftp"/> <input type="button" value="Browse..."/> <input type="button" value="Export"/>
<b>Diagnosis Info</b>	
Storage Path	<input type="text" value="C:\Users\MyLocalFiles\Debug\"/> <input type="button" value="Browse..."/> <input type="button" value="Download"/>

- (3) Click **Browse** in the **Firmware Upgrade** area. In the **Select** dialog box that appears, select the upgrade file package, for example, IPC\_D6108-XXXXX.zip, and then click **Open**.
- (4) Click **Upgrade**. You cannot operate on other pages during the upgrade process.

- (5) Wait till the upgrade is completed. A message appears to indicate successful upgrade and prompt you to log in again after the device restarts.

## 5 Version Upgrade Disclaimer

1. By setting or installing this program in any way you agree to all of the following terms and conditions. Your downloading or using the program means you acknowledge your full understanding and acceptance of the following terms and conditions. If you do not agree to any of the following terms, you shall not use the program and you must cease installing and delete the program immediately.
2. The upgrade program is only applicable to the intended regions and product models. Before upgrade or update, please read the release notes carefully to make sure the program is applicable to your region and product model. You will be fully liable and responsible for all the consequences of device abnormality and related maintenance costs caused by your improper operations.
3. Uniview owns or is legally authorized to own all rights and IPRs (Intellectual Property Rights) of the program and the supplied release notes.
4. Software upgrades are for the optimization of product functions and do not mean there is defect.
5. You must strictly follow instructions in the release notes during the upgrade process, otherwise you are responsible for the possible consequences and related maintenance costs.
6. You shall not engage in any of the following activities, otherwise you would be liable for infringement and responsible for any adverse consequences arising therefrom.
  - 6.1 Copy the program (exclude the reasonable and necessary copies for internal backups);
  - 6.2 Exclude this statement when using the program or transfer the program to any third party;
  - 6.3 Modify the program or its derivatives;
  - 6.4 Reverse engineer, decompile or disassemble this program.
7. The program is only intended for authorized users. Its architecture, organization and source code are valuable trade secrets and confidential information owned by Uniview and its authorized parties. You agree not to provide or disclose any confidential information contained in or derived from the software to any third party. No part of this document may be excerpted, reproduced, or distributed in any form by any entity or individual without written consent from our company.