

Indoor Station

OEI-372S-H-W



Overview

OEI-372S-H-W indoor station is one of the terminals in the digital building intercom system, with functions of video intercom, security alarm, network camera monitoring, etc., providing a safe and comfortable living environment for residents. It can be widely used in building systems such as smart communities, villas, and office parks.

Features

- Durable ABS casing with a glass panel.
- 1024×600 HD touchscreen display.
- Batch configuration and transfer.
- Remote and one-touch unlocking of linked door stations.
- Network camera monitoring and security alarm.

Specifications

Model	OEI-372S-H-W	
Hardware Specification		
Power Supply	DC12V±25%,IEEE802.3af, Standard PoE	
Power Consumption	<10W	
Screen	7-inch ultra-thin TFT LCD screen	
Screen Resolution	Screen resolution 1024×600	
Operation System	Linux	
Audio Quality	Noise suppression, echo cancellation and AGC	
Audio Input	1 built-in omnidirectional microphone	

1

unv		DATASHEET
Audio Output	1 built-in speaker	
Audio Compression Standard	MP3 G711	
Audio Compression Bitrate	128Kbps	
Interface	Power*1, network*1, WiFi*1, RS485*1, IO output*2, IO input*8, TF card slot*1	
Network	100Mbps network port, supports IEEE802.3af PoE power supply,WIFI4、2.4GHZ	
Weight	360g	
Dimensions (L x W x H)	193mm×143mm×25mm	
Operating Environment	-10°C to +55°C, 10% to 90%, non-condensing, indoor	
Basic Business		
Protocol	UNV private protocol	
Network protocol	TCP/IP, IPv4, HTTP, RTP, RTSP, NTP	
Specification Index		
	200 ScreenShots	
Capacity	200 Zone Alarms	
	A total of 20 connected devices, including IPCs, entrance stations, NVRs (up to 2), and Doorbells	
Linked Indoor Station Capacity	19 extensions	

Ordering Info

Product Model	Description
OEI-372S-H-W	Wall Mounted 7-Inch Indoor Station(Touch Screen)

Accessories


OEP-SP11

Power Emboitement





Dimensions

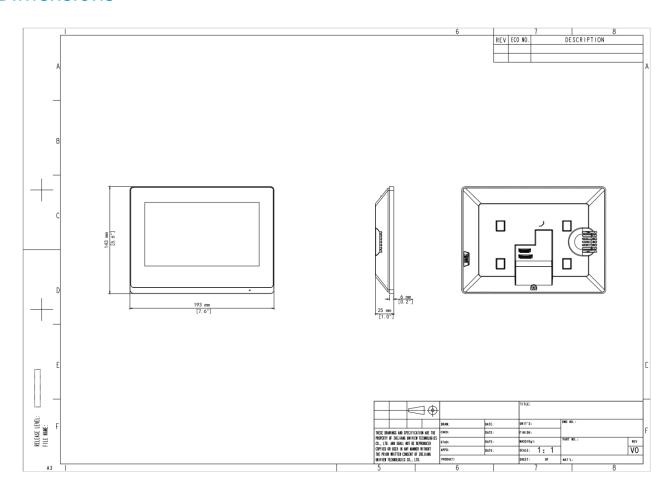

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.