

# 7-Channel H.265 Decoding Card

FB-HD07-B-NB



## Features


- Support 7-ch HDMI
- HDMI at up to 4K (3840x2160) resolution
- All HDMI independent outputs provided
- Support H.265/H.264 video formats
- Up to 16 Megapixels resolution recording

## Specifications

Video/Audio Output	Description
HDMI Output	HDMI1 & HDMI2 & HDMI3 & HDMI4: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz

	HDMI5 & HDMI6 & HDMI7: 1920x1080 /60Hz, 1920x1080 /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Decoding	Description
Decoding Capability	HDMI1 & HDMI3 & HDMI5 & HDMI7: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 72x 720P@30, 112 x D1 HDMI2 & HDMI4 & HDMI6: 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@30, 72x 720P@30, 112 x D1
Decoding	Description
Multi-window	1/4/5/6/7/8/9/16
Working Environment	Description
Working Temperature	-10°C ~ + 55°C (14°F to +131°F)
Working Humidity	10% ~ 90% (non-condensing)
Weight	Description
Weight	<1 Kg (2.2 lb)

## Dimensions

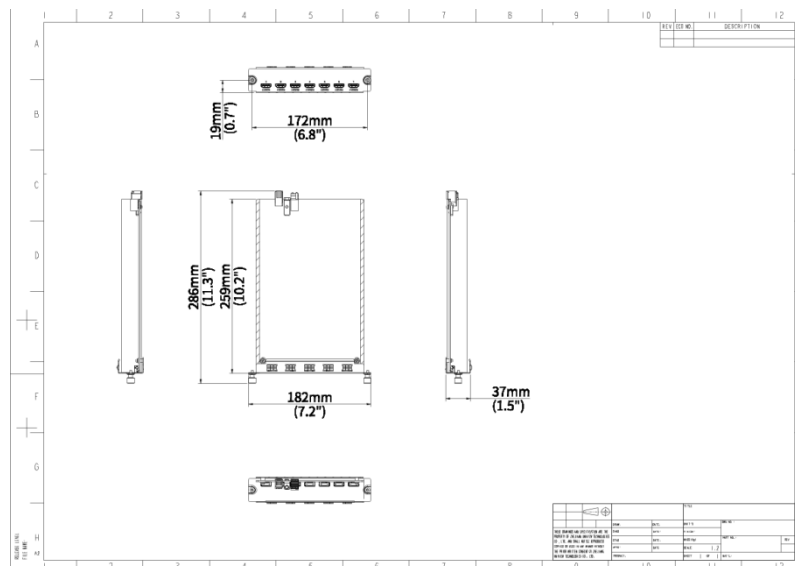

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.