


EZStation 3.0-Mac Datasheet

EZStation 3.0-Mac

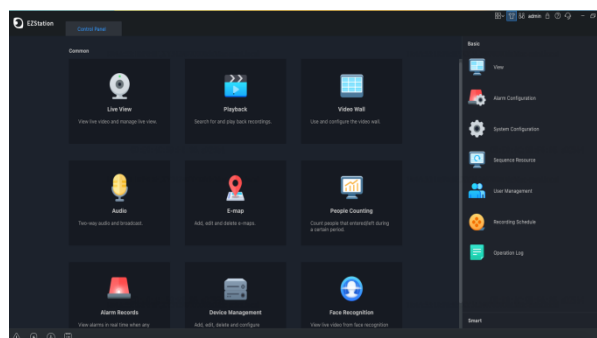

Features

- Unified management for Uniview's encoding devices, decoding devices, cloud devices, network keyboards, and access control devices, etc.
- Efficient device management: automatic device discovery (or search by network segment); add devices by IP address/domain name; add devices by EZDDNS; add devices and sync device time in batches.
- Diverse functions:
 - Live view: scene, split screen, auxiliary screen display, corridor mode, sequence display, instant playback, fisheye dewarping
 - Recording: local recording, scheduled recording, recording download
 - Playback: synchronous/asynchronous playback, smart recording playback, event recording playback, and VCA recording playback, search recordings, play back recordings on SD card
 - PTZ control: preset, preset patrol, recorded patrol, auto guard
 - Audio: camera audio, two-way audio
 - Alarm: service alarm (event alarm, VCA alarm), device alarm (online/offline, etc.), alarm linkage (live view, etc.), real-time/history alarm management
 - People counting: people flow counting in a specific area, crowd density monitoring, export statistics by week/month
 - E-Map: hot spot, hot zone, eagle eye, live video, map alarm, e-map of cloud devices
 - Video wall: live view, sequence display and playback on video wall, alarm to video wall, open window(s) by one click, open window(s) by coordinates, auto-bind decoding channel, multi-window for one decoding channel, save and switch scene, small pixel pitch LED, virtual LED
 - Perimeter protection: real-time monitoring, report perimeter alarms in real time, search alarm videos and images of cross line detection, intrusion detection, enter area detection, and leave area detection
 - Face detection: live view image, real-time face snapshot and comparison, alarm records, face library management and monitoring tasks, body temperature measurement, Smart detection, search and export NVR records, search pass-through records by images

- Access control: remote door opening, Smart detection alarm, abnormal body temperature alarm, search and export entry/exit records

Specifications

Model	SWP-EZStation-Mac
Management	
Ordinary Video Channel	512
Decoding Device	32
Encoding Device (IPC, NVR)	64
Access Control Device	32
Video Wall	20
People Counting Group	20
Channels Per People Counting Group	128
Device Management	
Device Management	Device discovery (auto discovery, specify network segment) Add devices by IP address/domain name/EZDDNS Cloud device management (add, edit, delete and share) Group devices, view device status, restart device, sync device time with PC time Remote configuration (image parameters, encoding parameters) Fisheye camera supported Note: Only Uniview brand devices can be added
Live View	
Live View Screen Layout	1 / 4 / 5 / 6 / 8 / 9 / 10 / 13 / 16 / 17 / 25 / 32 / 36 / 64 split view 1 / 4 / 9 / 16 / 25 default view and custom view 3 auxiliary screens Custom layout
PTZ Control	Pan, tilt, zoom, shortcut PTZ, focus, preset, patrol, 3D positioning, IR control, wiper control, heat control, snow removing, auto guard Note: Actual functionality may vary depending on device capability.
Live View Audio	Camera audio, two-way audio Note: Actual functionality may vary depending on device capability.
Live View	Group display, sequence display, snapshot, continuous snapshot, digital zoom, scene, instant playback, local recording, default and custom view, custom stream, corridor mode, manual alarm, window maximization, alarm output control
Playback	
Playback Recording	Play back recording from NVR and SD card 16-ch (Async)/16-ch (Sync) playback Display recording status on a calendar Recording in .ts, .mp4 format
Playback	Local recording, scheduled recording, play back recording by type (normal recording, event recording, VCA recording, smart recording), download recording by file/time, snapshot, digital zoom, -16x~16x speed for forward and backward, audio, instant playback, play back local

	recordings, smart playback, playback by image, playback by frame, playback in default/custom view
Alarm	
Alarm Type	Multiple alarm types
Alarm Linkage	Supports alarm linkage to live view, preset, alarm output, playing alarm video on the video wall (cloud camera linkage is not yet supported), email, and other methods. When Enhanced Alert is selected, a flashing red frame will appear on the live alarm video window as a reminder Trigger other IPCs
Alarm Records	Alarm level filter Real-time alarm info display and acknowledge, and alarm video preview History alarm display/acknowledge/search
Video Wall Function	
Video Wall Configuration	Auto-bind decoding channel Control by power distribution box Small pixel pitch LED Local video source
Virtual LED	Multiple virtual LEDs Edit font, transparency, background color, font spacing, font alignment, scrolling mode, scrolling speed
Window Operation	Open window by one-click or coordinates Roam, resize, and snap window Arrange windows by split ID Lock/unlock window
Video Wall Operation	Play live view/playback, sequence resource on video wall, and alarm to video wall
E-Map	
E-Map Format	PNG/JPEG/BMP
Map Alarm	Alarm flash, search and acknowledge
E-Map	Hot spot, hot zone, map zoom in/out, eagle eye, alarm output control Supports Uploading a Maximum of 20 Images; up to 7 layers of maps are allowed.
People Counting	
People Counting Realtime Statistics	Form a counting area with multi-cameras to count people coming in/out/remaining, and monitor crowd density in real time Note: People counting camera must be connected to EZStation via an NVR.
People Counting Report Statistics	People flow counting in a specific area Statistics by minute/hour/day/month, statistics of the day, last 7 or 30 days Display statistics in a bar chart, line chart or table, show statistics at a specified time point Export data to a CSV file
VCA	
Realtime Monitoring	View live videos (up to 4 cameras), and view alarm records in real time
Behavior Search	Play and download 10s VCA alarm recording saved on NVR/AIBOX (5s before and 5s after a VCA alarm) View and download VCA alarm images saved on NVR/AIBOX

	Export search results
Heat Map	View people counting heat map of NVR channels. The different colors on the live video image indicate different levels of crowd density. As shown in the color scale, red represents the highest density, while blue represents the lowest Note: This function must be used with fisheye camera and NVR that supports heat map counting (e.g., NVR 516-128E-R)
Face Detection	
Face Detection Realtime Monitoring	View live images from up to 4 cameras, view snapshots and real-time face detection alarms Detect abnormal body temperature and Smart detection status Note: Alarms will be reported only if the corresponding monitoring task has been configured.
Face Library Management	Add, delete face library, edit face library name Add face data in batches, edit, delete, import and export face data Filter face data by name, ID number and gender
Face Detection Monitoring Task	Monitor using a face library and report alarms Set task name, alarm type (match alarm, not match alarm, all), choose face library to be used for a monitoring task, and set alarm threshold
Face Detection Alarm Records	Search face match/not match alarm records from NVR Search alarm records of a device with criteria such as monitoring type, alarm time, name, ID number, and similarity Quick adding of strangers to face library, view original snapshot Export search records
Pass-thru Records	Search pass-through records from NVR Search pass-through records of a device by alarm time Quick adding of strangers to face library, view original snapshot Export search records
Search By Image	Search pass-through records by a face image for similar faces Search images with criteria such as face image, time and similarity Search by a library image or local image Search the alarm video before and after the alarm event
Access Control	
Access Control Person Management	Add, delete face library, edit face library name Batch add faces to face library, delete and edit personal information, import/export, template download Search personal information by name and ID number
Access Control Realtime Monitoring	Live view (up to 4 cameras), remote door opening, real-time pass-through records
Access Control Entry/Exit Records	Search entry/exit records of a device with criteria such as time, wearing or not wearing Smart detection, body temperature range, name, IC card number Quick adding of strangers to face library, view original face snapshot image Export search records

LPR	
Real-time Monitoring	View live video (up to 4 channels), vehicle snapshots, and real-time comparison records Note: Alarms are reported only after the corresponding monitoring task is configured
Vehicle Library Management	Add, delete vehicle libraries, edit vehicle library names Batch add, edit, delete, and import/export license plate data, and batch add to vehicle libraries of multiple devices
Monitoring Task	Monitor license plates in vehicle libraries and report alarms Set the task name, alarm type (Match Alarm, Not Match Alarm), monitoring reason, and select the monitored vehicle library and video channels Up to 25 monitoring tasks can be created
LPR Alarm Records	Search license plate match/not match records on NVR Search by monitoring type, time, license plate number, license plate color, vehicle body color, and monitoring reason Search records can be exported
LPR Vehicle Pass-Thru Records	Search vehicle pass-through records on NVR Search vehicle pass-through records of a single device by alarm time, license plate number, license plate color, and vehicle body color Search records can be exported
AI Search	
SeekFree	Search snapshots of person/vehicles/bicycles/objects/animals by keyword-based text descriptions, and view videos before and after the target appears Supports cross-NVR search, with up to 8 NVRs selectable Supports quickly selecting scene and behavior types as search conditions; scene and behavior types are customizable
AcuSearch	Upload images of person/motor vehicles/non-motor vehicles to search target snapshots, and view videos before and after the target appears Supports cross-NVR search, with up to 8 NVRs selectable
AcuTrack	Upload images of person/motor vehicles/non-motor vehicles to search video clips where the target appears, and mark the target's appearance time on the playback progress bar Only a single NVR can be selected for search Records of up to 24 hours of recordings can be searched
User Management	
User Management	Add, edit and delete user, search user Up to 100 users can be added
User Level	Super administrator, administrator, operator
User Information	User name, password, user level, permissions Different default permissions for different user levels Assignable permission(s) of each user
Operation Logs	
Log Search	Search logs using criteria, view details, export user operation records Log records include usernames, operation details, and results
System Configuration	
Audio & Video	Configure video play mode, stream type, processing mode, stream transmission protocol

	Play main stream in maximized live view window Enable shortcut PTZ control, VCA rule, Configure snapshot mode, continuous snapshot interval, number of continuous snapshots, snapshot format, image save path Configure format and save path for local and downloaded recordings Configure storage policy, recording space, and recording file size
System	Enable auto login to EZStation Set retention period for operation/alarm log Import and export configuration
Operation	Set alarm duration, alarm recording start and end time Enable auto time sync, set synchronization interval Configure SMTP server and email address used to send/receive emails Epidemic control: configure temperature unit, Smart detection, body temperature measurement, abnormal body temperature threshold and others Configure face attribute display information, including face match/not match/snapshot display information"
System Requirement	
EZStation 3.0 Mac	Mac OS 12/13/14/15, Intel Core i5 3.1 GHz or higher, 4GB or higher

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.