


Ethernet Interface Module Datasheet

FB-IN9800-24GT20GP4XP-IN

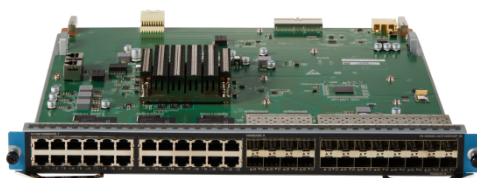

Features

- High-density access, multi-port integration, free expansion

Specifications

Model	FB-IN9800-24GT20GP4XP-IN
Hardware Specification	
Ports Type	24×10M/100M/1000M RJ45 port + 20×100M/1000M optical port (SFP) + 4×1G/10G optical port (SFP+)
Switching capacity	168Gbps
Forwarding performance	124.99Mpps
Jumbo Frame	9216B
Dimensions (W×D×H)	400mm*415mm*40mm
Max.Power	90W
Software Specification	
IP Route	IPv4: 64K, IPv6: 15K
MAC	128K (including 4K static)
ARP	24K

Ordering Info

Product Model	Description
FB-IN9800-24GT20GP4XP-IN	IN9800 Ethernet Interface Module

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

-  <http://www.uniview.com>
-  overseasbusiness@uniview.com; globalsupport@uniview.com
-  No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
(Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
*Despite our best efforts, technical or typographical errors may exist in this document.
Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.