

Wall Mount Mifare Card Reader

OEC-R3H-M



Overview

OEC-R3H-M wall mount Mifare card reader is a contactless IC card reader. It features high receiving sensitivity and low working current, applicable to scenarios such as access control, attendance, etc.

Features

- Supports Wiegand/RS-485 data output.
- Built-in buzzer.
- Supports indoor and outdoor application.
- Stability, sensitivity, and responsiveness.
- Supports ISO 14443-A and ISO 14443-B protocols.

Specifications

| Model | OEC-R3H-M | |
|------------------------|---|--|
| Hardware Specification | | |
| Operating Frequency | 13.56MHz | |
| Interface | Wiegand 26/34, RS485 | |
| Material | PC | |
| Dimensions (L x W x H) | 129*88*21mm | |
| Weight | 134g | |
| Mount Method | 115*73mm junction box, 86*86mm junction box | |
| Operating Temperature | -30°C to 65°C | |
| Operating Humidity | 10% to 90% | |


1

| unv | | DATASHEET |
|---------------------|---|-----------|
| Storage Temperature | -40°C to 65°C | |
| Indicator | Steady blue: Normal operation; | |
| | Steady green for 1s: Card authentication succeeded; | |
| | Steady red for 1s: Card authentication failed | |
| Power Consumption | 0.732W | |
| Operating Voltage | DC 12V ± 25% | |
| Operating Current | 61mA | |
| Reading Distance | IC card: max. 5cm | |
| Authentication Mode | Card | |
| Protection Level | IP65 | |
| Basic Business | | |
| Reading Time | <1s | |
| Card Type | Mifare card | |

Ordering Info

| Product Model | Description |
|---------------|---------------------------------|
| OEC-R3H-M | Wall Mounted Mifare Card Reader |

Dimensions

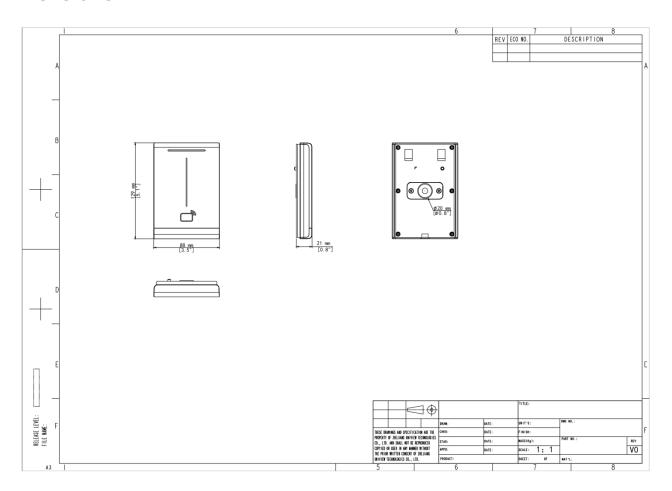



Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.