


# Harsh Fast Ring Managed PoE Switch

## ISW5000-8GT4GP-POE-IN

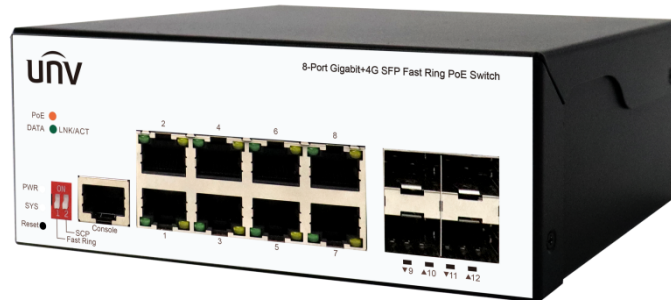

## Overview

ISW5000-8GT4GP-PoE-IN is a managed Ring-network harsh PoE switch independently developed by Uniview. It has 8\*10/100/1000Mbps adaptive RJ45 ports and 4\*1000Mbps SFP fiber module expansion slots. 1-8 RJ45 ports all support PoE power supply, a single port up to 30W. Support static routing functions, provide perfect security, QoS, and plenty of VLAN function has ring network function, can form a ring network, Switch between by hand in hand form a ring network topology, the redundancy, high reliability characteristics can make in a ring online link disconnected all the way, will not affect the forwarding of data on the network. The device adopts no fan, low power consumption design, has the advantages of easy to use, compact and beautiful, simple installation. The product is designed to meet Ethernet standards, with lightning protection, static protection mechanism, operating temperature range of -30°C to 65°C, stable performance, safety and reliability, can be widely used in intelligent transportation, telecommunications, security, financial securities, customs and other broadband data transmission fields.

## Features

- PoE supports IEEE 802.3af/at standards and provides a maximum output of 30W for each port;
- Data transmission and power supply distance up to 100 meters;
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control
- Panel indicators monitor working status and assist in fault analysis;

- Supports one-click ring network and one-click storm suppression, featuring redundancy and high reliability;
- Highly reliable design, supporting traditional STP/MSTP/RSTP Layer 2 link protection technology;
- Support static convergence and dynamic convergence (LACP) 2 convergence modes, effectively increase the link bandwidth, improve the reliability of the link, and at the same time can achieve load balancing, link backup;
- Flexible and convenient management and maintenance Supports various management modes, such as Console, Telnet, and SSH;
- Supports WEB management, which is simple and efficient, and facilitates installation and debugging by engineering and maintenance personnel;
- Supports file upload and download management through TFTP;

## Specifications

Model	KIT/1*ISW5000-8GT4GP-POE-IN/1*PWR-DC5428-A-NB
Hardware Specification	
Standards	IEEE802.3、IEEE802.3u、IEEE802.3z、IEEE802.3ab、IEEE802.3x、IEEE802.3af、IEEE802.3at
Ports Type	8*10/100/1000Mbps RJ45 Ports 4*1000Mbps SFP Slots
Switching capacity	24Gbps
Jumbo Frame	9KBytes
Forwarding performance	17.86Mpps
Packet Buffer	4.1M bit
MAC	8K
Transfer Mode	Store-and-forward
Max.PoE Power	Max capacity: 120W Max capacity for single port: 30W Mode A 1/2 (-), 3/6 (+)
Dimensions (W×D×H)	145*109*58mm
Operating Temperature	-30°C to 65 °C
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Power Supply	DC:48-57V, Max.Power 135W (Powered by adapter) Adapter: AC100-240V, 50/60Hz
Indicator	PWR, LNK/ACT
Electrostatic Standard	Contact ±6KV, Air ±8KV

Surge Protection	Differential mode $\pm 2\text{KV}$ Common mode $\pm 4\text{KV}$
<b>Software Specification</b>	
MAC Address	MAC Aging Time MAC Filter MAC Notification
Basic Management	Console/Telnet/SSH Http/Https、SSL/TLS FTP/TFTP Syslog SNMP(v1/v2c/v3)、SNMP Trap SNTP/NTP CPU protect Software/Hardware watchdog Firmware Upgrade/Backup Ping/Traceroute
Port Config	Bandwidth Control Flow Control EEE MTU CFM(802.1ag) EFM OAM(802.3ah) DDM Storm Control Port Isolation Port Security Virtual Cable Test ULDP
Discovery	LLDP(802.1ab) LLDP-MED
Link Aggregation	Static LACP(802.3ad) Load Balance(src-mac/dst-mac/src-ip/dst-ip) Max groups and ports per group

VLAN	<p>VLAN(802.1Q 4K)</p> <p>Access/Trunk/Hybrid</p> <p>Private VLAN</p> <p>VLAN Filter</p> <p>MAC-based VLAN</p> <p>Protocol-based VLAN</p> <p>IP Subnet-based VLAN</p> <p>Voice VLAN</p> <p>GVRP/GMRP</p> <p>QinQ/Selective-QinQ/Flexible QinQ</p> <p>VLAN Translation/N:1 VLAN Translation</p> <p>Guest VLAN</p>
Network Loop Detection	<p>Loopback Detection</p> <p>ERPS</p>
Spanning Tree	<p>STP/RSTP/MSTP</p> <p>MSTP Support 64 instance</p> <p>BPDU Guard/Root Guard/BPDU Tunnel</p>
ARP	<p>Static ARP</p> <p>ARP Scanning Prevention</p> <p>ARP Spoofing Prevention</p> <p>ARP Guard</p> <p>Gratuitous ARP</p> <p>Dynamic ARP Inspection</p> <p>ARP Quantity Control</p>
ICMP	<p>Anti ICMP Attack</p> <p>ICMP Rate Limit</p> <p>ICMP Unreachable Drop</p>
IP Forward	<p>Static Route</p> <p>Route Aggregation</p>
Multicast VALN	Multicast VALN
IGMP	<p>IGMP SNOOPING V1/V2/V3</p> <p>Fast Leave</p> <p>IGMP Proxy</p>
DHCP	<p>DHCP Server</p> <p>DHCPv4 Client/BOOTP</p> <p>DHCPv4 Relay</p> <p>DHCPv4 Snooping</p> <p>DHCPv4 Option 82/43/60/61/67</p>

IPv6 Basic	IPv6 ND Snooping
DHCPv6	DHCPv6 Relay DHCPv6 Snooping IPv6 SAVI Security RA DHCPv6 Server
IPv6 Unicast Routing	Static Route
IPv6 Multicast Routing	MLD v1/V2 Snooping
IPv6 Features	SNMP over IPv6 Support HTTP over IPv6 Support SSH over IPv6 Support DNS over IPv6 Support IPv6 ping/traceroute Support IPv6 Telnet Support IPv6 Radius+ Support IPv6 Tacacs+ Support IPv6 SNTP/NTP Support IPv6 FTP/TFTP Support IPv6 IPSec Support IPv6 ACL
Basic	Trust COS/DSCP Trust Port
Scheduling	SP WRR WDRR
PolicyMap Stream	Based on VLAN Based on COS/DSCP Aggregate PolicyMap Ingress PolicyMap
Policing	CAR Stream Shaping(leak algorithm) Ingress Policing
Rewrite	COS/802.1p Priority IP Precedence IPv4 DSCP/IPv6 DSCP drop-precedence internal-priority Ingress/Egress Rewrite

Queuing	<p>DSCP to DSCP mapping</p> <p>DSCP to DP mapping</p> <p>DSCP to Queue mapping</p> <p>COS to DP mapping</p> <p>COS to Queue mapping</p>
IP-ACL	<p>SIP/DIP</p> <p>IP Protocol</p> <p>IP Priority(DSCP,TOS, Precedence)</p> <p>TCP,UDP src,dst Port</p>
MAC-ACL	<p>SRC/DST MAC</p> <p>VLAN</p> <p>COS</p> <p>Tag/Untag</p>
IP-MAC ACL	MAC-ACL and IP-ACL
User-defined ACL	Base on user defined profile
ACL Features	<p>Based on time period ACL</p> <p>ACL on VLAN</p> <p>Based on ACL Stream</p>
802.1x	<p>Port Based Authentication</p> <p>Support EAPoR</p> <p>MAC based Authentication</p> <p>Guest VLAN</p>
MAB	<p>Based on Port Authentication</p> <p>Based on MAC Authentication</p>
MAC Address Count Limit	<p>Based on Port</p> <p>Based on VLAN</p>
IP Address Count Limit	<p>Based on Port</p> <p>Based on VLAN</p>
Access Management	Based on source mac and IP address
Deny DoS Attack	<p>TCP Flag</p> <p>TCP Fragment</p> <p>IP Segment</p> <p>ICMP</p>
TACACS+	Standard Support
Radius	<p>Standard Support</p> <p>Client, Support MD5</p>

SSL	Openssl 1.1.0
MRPP	Compatible ERRP
ULPP	Uplink Protection Protocol Smart Link/Monitor Link
ULSM	Uplink State Monitor
Mirror	Support one to one, multi to one Port based mirror, support ingress, egress, and both CPU based mirror Flow based mirror RSPAN
PoE Management	ON/OFF Config Alive Checking for PD 7/24 On/Off Scheduling

## Adapter Introduce



## Ordering Info

Product Model	Description
KIT/1*ISW5000-8GT4GP-POE-IN/1*PWR-DC5428-A-NB	Harsh POE Switch Package

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.