


# Harsh Fast Ring Managed PoE Switch ISW5000-8GT4GP-POE-IN

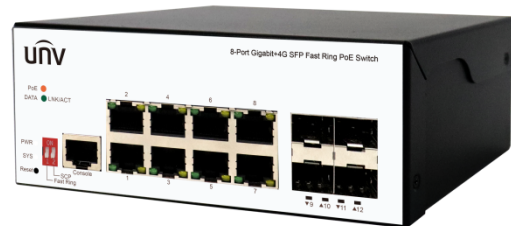

## Overview

ISW5000-8GT4GP-PoE-IN is a managed Ring-network harsh PoE switch independently developed by Uniview. It has 8\*10/100/1000Mbps adaptive RJ45 ports and 4\*1000Mbps SFP fiber module expansion slots. 1-8 RJ45 ports all support PoE power supply, a single port up to 30W. Support static routing functions, provide perfect security, QoS, and plenty of VLAN function has ring network function, can form a ring network, Switch between by hand in hand form a ring network topology, the redundancy, high reliability characteristics can make in a ring online link disconnected all the way, will not affect the forwarding of data on the network. The device adopts no fan, low power consumption design, has the advantages of easy to use, compact and beautiful, simple installation. The product is designed to meet Ethernet standards, with lightning protection, static protection mechanism, operating temperature range of -30°C to 65°C, stable performance, safety and reliability, can be widely used in intelligent transportation, telecommunications, security, financial securities, customs and other broadband data transmission fields.

## Features

- PoE supports IEEE 802.3af/at standards and provides a maximum output of 30W for each port;
- Data transmission and power supply distance up to 100 meters;
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control;
- Panel indicators monitor working status and assist in fault analysis;
- Supports one-click ring network and one-click storm suppression, featuring redundancy and high reliability;
- Highly reliable design, supporting traditional STP/MSTP/RSTP Layer 2 link protection technology;
- Support static convergence and dynamic convergence (LACP) 2 convergence modes, effectively increase the link bandwidth, improve the reliability of the link, and at the same time can achieve load balancing, link backup;
- Flexible and convenient management and maintenance Supports various management modes, such as Console, Telnet, and SSH;
- Supports WEB management, which is simple and efficient, and facilitates installation and debugging by engineering and maintenance personnel;

- Supports file upload and download management through TFTP;

## Specifications

Model	ISW5000-8GT4GP-POE-IN
<b>Hardware Specification</b>	
Standards	IEEE802.3、IEEE802.3u、IEEE802.3z、IEEE802.3ab、IEEE802.3x、IEEE802.3af、IEEE802.3at
Ports Type	8*10/100/1000Mbps RJ45 Ports 4*1000Mbps SFP Slots
Switching capacity	24Gbps
Jumbo Frame	9KBytes
Forwarding performance	17.86Mpps
MAC	8K
Transfer Mode	Store-and-forward
Max.PoE Power	Max capacity: 120W Max capacity for single port: 30W Mode A 1/2 (-), 3/6 (+)
Dimensions (W×D×H)	145*109*62.3mm
Operating Temperature	-30°C to 65 °C
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Indicator	PWR, LNK/ACT
Electrostatic Standard	Contact ±6KV, Air ±8KV
Surge Protection	Differential mode ±2KV Common mode ±4KV
Power Supply	DC:48-57V, Adapter: AC100-240V, 50/60Hz
<b>Software Specification</b>	
MAC Address	MAC Aging Time MAC Filter MAC Notification
Basic Management	Console/Telnet/SSH Http/Https、SSL/TLS FTP/TFTP Syslog SNMP(v1/v2c/v3)、SNMP Trap SNTP/NTP CPU protect Software/Hardware watchdog Firmware Upgrade/Backup Ping/Traceroute
Port Config	Bandwidth Control Flow Control EEE MTU

	<p>CFM(802.1ag)  EFM OAM(802.3ah)  DDM  Storm Control  Port Isolation  Port Security  Virtual Cable Test  ULDP</p>
Discovery	<p>LLDP(802.1ab)  LLDP-MED</p>
Link Aggregation	<p>Static  LACP(802.3ad)  Load Balance(src-mac/dst-mac/src-ip/dst-ip)  Max groups and ports per group</p>
VLAN	<p>VLAN(802.1Q 4K)  Access/Trunk/Hybrid  Private VLAN  VLAN Filter  MAC-based VLAN  Protocol-based VLAN  IP Subnet-based VLAN  Voice VLAN  GVRP/GMRP  QinQ/Selective-QinQ/Flexible QinQ  VLAN Translation/N:1 VLAN Translation  Guest VLAN</p>
Network Loop Detection	<p>Loopback Detection  ERPS</p>
Spanning Tree	<p>STP/RSTP/MSTP  MSTP Support 64 instance  BPDU Guard/Root Guard/BPDU Tunnel</p>
ARP	<p>Static ARP  ARP Scanning Prevention  ARP Spoofing Prevention  ARP Guard  Gratuitous ARP  Dynamic ARP Inspection  ARP Quantity Control</p>
ICMP	<p>Anti ICMP Attack  ICMP Rate Limit  ICMP Unreachable Drop</p>
IP Forward	<p>Static Route  Route Aggregation</p>
Multicast VALN	<p>Multicast VALN</p>

IGMP	IGMP SNOOPING V1/V2/V3 Fast Leave IGMP Proxy
DHCP	DHCP Server DHCPv4 Client/BOOTP DHCPv4 Relay DHCPv4 Snooping DHCPv4 Option 82/43/60/61/67
IPv6 Basic	IPv6 ND Snooping
DHCPv6	DHCPv6 Relay DHCPv6 Snooping IPv6 SAVI Security RA DHCPv6 Server
IPv6 Unicast Routing	Static Route
IPv6 Multicast Routing	MLD v1/V2 Snooping
IPv6 Features	SNMP over IPv6 Support HTTP over IPv6 Support SSH over IPv6 Support DNS over IPv6 Support IPv6 ping/traceroute Support IPv6 Telnet Support IPv6 Radius+ Support IPv6 Tacacs+ Support IPv6 SNTP/NTP Support IPv6 FTP/TFTP Support IPv6 IPSec Support IPv6 ACL
Basic	Trust COS/DSCP Trust Port
Scheduling	SP WRR WDRR
PolicyMap Stream	Based on VLAN Based on COS/DSCP Aggregate PolicyMap Ingress PolicyMap
Policing	CAR Stream Shaping(leak algorithm) Ingress Policing
Rewrite	COS/802.1p Priority IP Precedence IPv4 DSCP/IPv6 DSCP drop-precedence internal-priority

	Ingress/Egress Rewrite
Queuing	DSCP to DSCP mapping DSCP to DP mapping DSCP to Queue mapping COS to DP mapping COS to Queue mapping
IP-ACL	SIP/DIP IP Protocol IP Priority(DSCP,TOS, Precedence) TCP,UDP src,dst Port
MAC-ACL	SRC/DST MAC VLAN COS Tag/Untag
IP-MAC ACL	MAC-ACL and IP-ACL
User-defined ACL	Base on user defined profile
ACL Features	Based on time period ACL ACL on VLAN Based on ACL Stream
802.1x	Port Based Authentication Support EAPoR MAC based Authentication Guest VLAN
MAB	Based on Port Authentication Based on MAC Authentication
MAC Address Count Limit	Based on Port Based on VLAN
IP Address Count Limit	Based on Port Based on VLAN
Access Management	Based on source mac and IP address
Deny DoS Attack	TCP Flag TCP Fragment IP Segment ICMP
TACACS+	Standard Support
Radius	Standard Support Client, Support MD5
SSL	Openssl 1.1.0
MRPP	Compatiable ERRP
ULPP	Uplink Protection Protocol Smart Link/Monitor Link
ULSM	Uplink State Monitor
Mirror	Support one to one, multi to one

	Port based mirror, support ingress, egress, and both CPU based mirror Flow based mirror RSPAN
PoE Management	ON/OFF Config Alive Checking for PD 7/24 On/Off Scheduling

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.