


# Unmanaged Harsh PoE Switch ISW2000-4T2GP-POE-IN

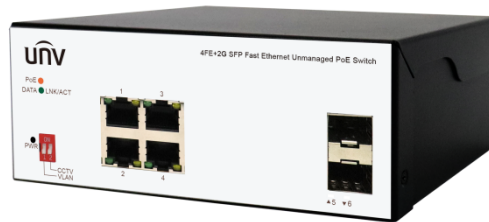

## 주요 특징


- PoE supports IEEE 802.3af/at standards and provides a maximum output of 30W for each port.
- Multiple working modes to address your business needs: VLAN, CCTV.
- VLAN mode: Downlink ports can communicate only with uplink ports.
- CCTV mode: The port is forced to speed down to 10Mbps transmission rate. Data transmission and power supply distance up to 250 meters. Downlink ports can communicate only with uplink ports.
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control.
- Panel indicators monitor working status and assist in fault analysis.
- Operating temperature: -30°C to 65°C.

## 사양

Model	ISW2000-4T2GP-POE-IN
Hardware Specification	
Standards	IEEE802.3、IEEE802.3u、IEEE802.3z、IEEE802.3ab、IEEE802.3x、IEEE802.3af、IEEE802.3at
Ports Type	4*10/100Mbps RJ45 Ports 2*1000Mbps SFP Slots
Switching capacity	4.8Gbps
Jumbo Frame	16KBytes
Forwarding performance	3.57Mpps
Packet Buffer	2 M bit
MAC	4K

Transfer Mode	Store-and-forward
Dimensions (W×D×H)	145*109*58mm
Operating Temperature	-30°C to 65 °C
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Indicator	PWR, LNK/ACT, PoE,DATA
Electrostatic Standard	Contact ±6KV, Air ±8KV
Surge Protection	Differential mode ±2KV Common mode ±4KV
Power Supply	DC:48-57V, powered by adapter. Max.Power 75W . Adapter: AC100-240V, 50/60Hz

## Installation

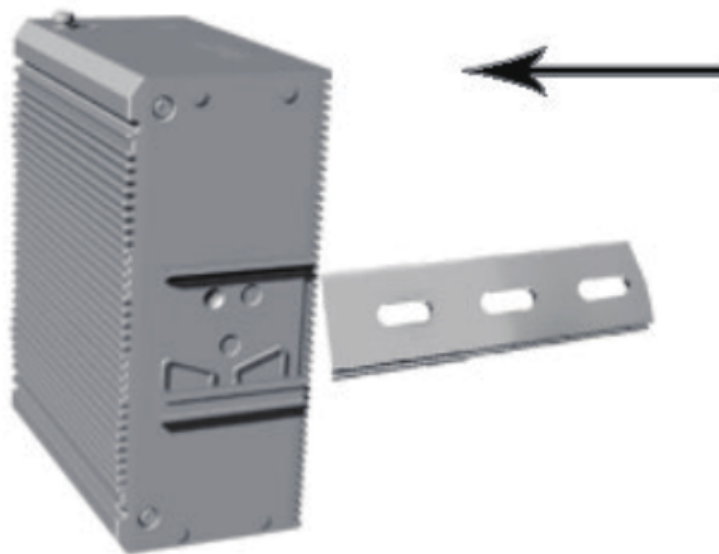

# Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。