

Single-Door Access Controller

OER-601




Overview

The single-door access controller features high performance and high reliability. It is designed with TCP/IP wired network communication interface and features specialized access control management functions, suitable for various complex access control scenarios.

Features

- ARM processor provides high concurrent processing speed.
- Supports network transparent transmission.
- Supports storage battery connection.
- Supports fire alarm linkage for enhanced security.
- Supports multiple authentication methods, including card, password, card&password, and QR code.
- Supports up to 200,000 cards and 300,000 events storage.
- Supports connecting to EZAccess platform (Only permission issuance is supported) , UNV Guard server.
- Supports device configuration through the web interface.
- Built-in door lock power supply, no additional power supply required.
- Supports door magnet detection.
- Supports local saving during the network interruption and resuming interrupted data when the network reconnects.
- Supports anti-passback and door opening with duress password.

Dimensions

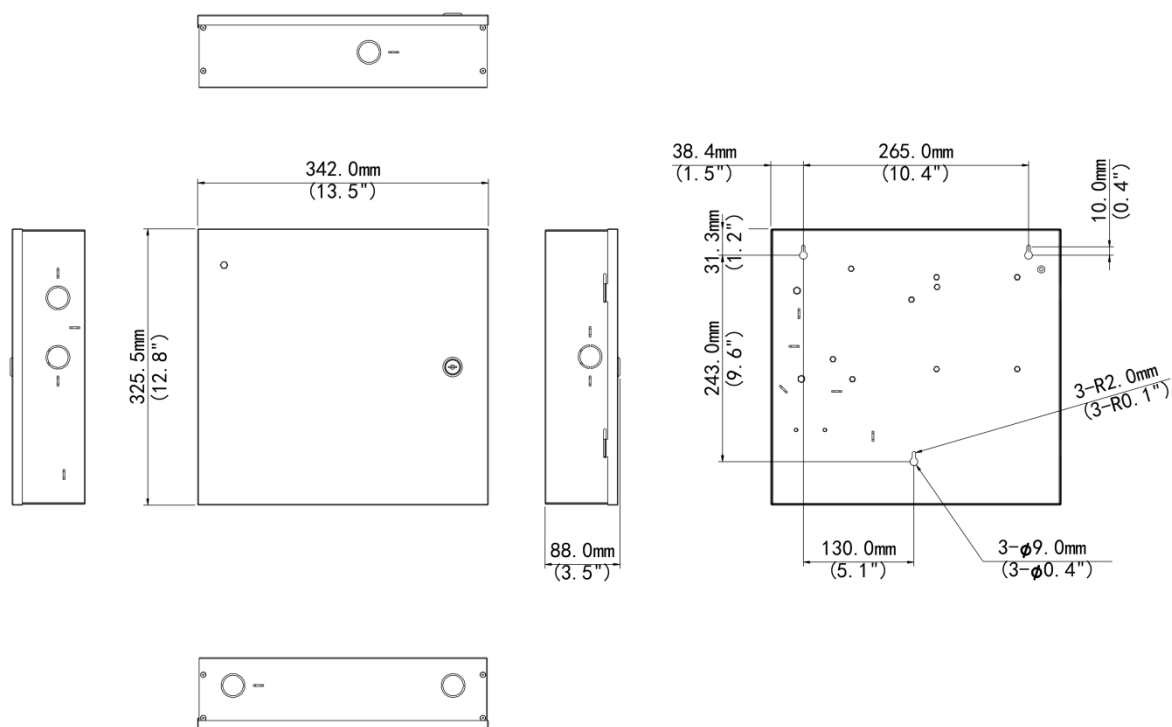

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.