
Triple-level Parking Availability Information Display

PKS3303-RG





주요 특징


- Installed at the parking lot entrance to display the total number of available parking spaces in the entire facility.
- Capable of showing real-time availability by zone or floor, guiding drivers to park quickly and efficiently.
- Illuminated lightbox with clear text indicators provides 24/7 visibility of available spaces on each level.
- Supports communication via Ethernet (RJ45) and RS485 interfaces.
- High-brightness LED lights ensure excellent visibility at extended viewing distances.
- Waterproof, dustproof, rust-resistant, and corrosion-resistant for reliable outdoor operation.

사양

Model	PKS3303-RG
Module	
Pixel Pitch	10mm
Module Resolution (W × H)	16*32
Display Parameters	
Display size	48*32
Display character	Numbers, letters, symbols
Display color	Red, green, yellow
Processing Image	
Brightness (nits)	4000
Color Temperature (K)	4500 ~ 5500K

Processing performance	
Scanning Mode (S)	4S
Drive Mode	Constant current
Refresh Rate (Hz)	1920
Interface	
Network interface	100M*1
Serial port	RS485*1
Electrical	
Power Supply	AC100 ~ 240V
General	
Product Dimensions (W × H × D) (mm)	2005*700*144
Ingress Protection	IP54
Operating Temperature	-20℃ ~ 50℃
Operating Humidity	10% ~ 95% RH (no condensation)
Accessories Included	Bottom decorative panel*2, M16-200 Expansion bolt*6, Key*2, Quick guide*1

크기

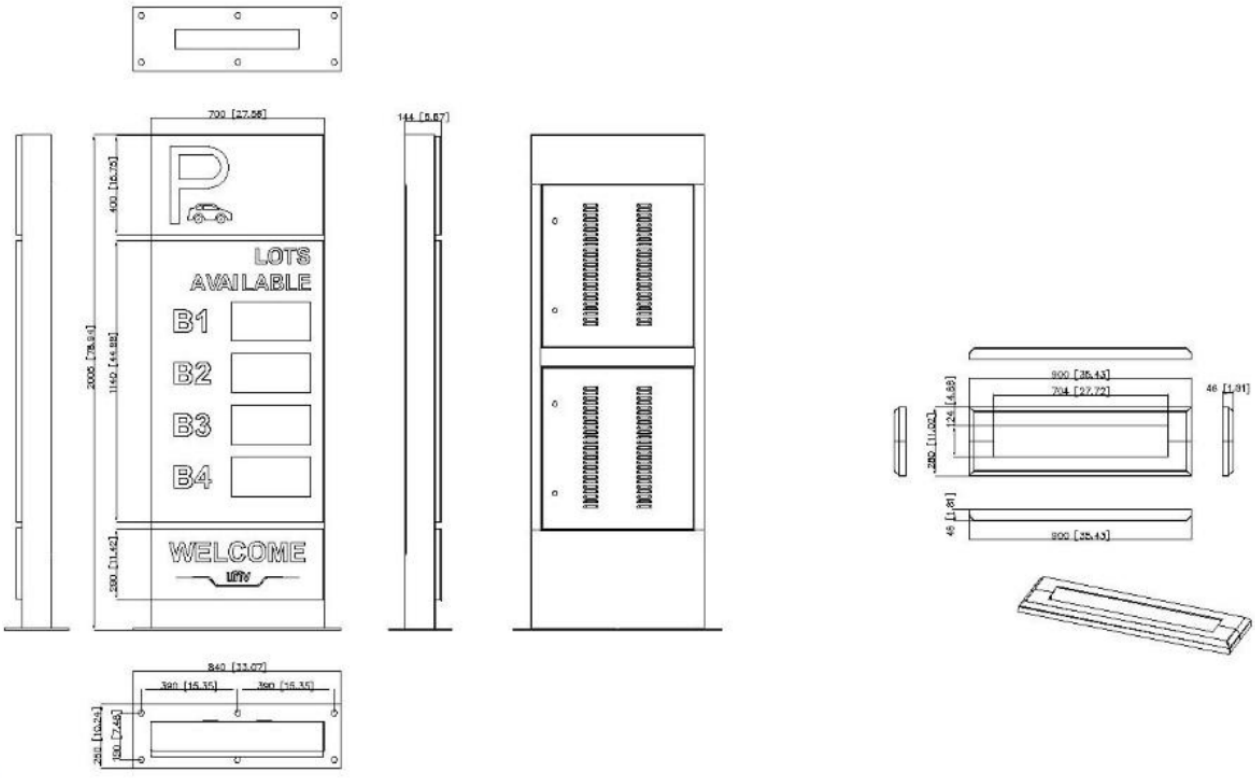

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.