

Unmanaged Ethernet PoE Switches

NSW2020-24T2GC-POE-IN



주요 특징


- Multiple working modes to address your business needs: Default (Normal mode), VLAN (Secure mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

사양

Model	NSW2020-24T2GC-POE-IN
Hardware Specification	
Ports Type	24×100Mbps PoE ports (RJ45) + 2×1000Mbps Combo ports
Switching capacity	8.8 Gbps
Packet Buffer	4 M bit
Forwarding performance	6.55Mpps
Power Supply	AC: 100 to 240V, 50/60Hz
MAC	16K
PoE Standard	IEEE 802.3af, IEEE 802.3 at
PoE Mode	ModeA (1236), ModeB (4578)
Max.PoE Power	Max capacity:370W Max capacity for single port: 30W
Prior Ports	1 to 8
Standards	IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3ab, IEEE802.3x, IEEE802.3af, IEEE802.3at, IEEE802.3az
Cooling Fans	1
Max.Power	390W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	<p>POWER:</p> <p>Steady on: AC input is normal</p> <p>Off: No AC input</p> <p>PoE:</p> <p>Off: No PoE power supply</p> <p>Steady on: PoE power supply is normal</p> <p>PoE-MAX:</p> <p>off : The POE power supply power of the whole machine is less than 80% of the specification</p> <p>Steady on : The POE power supply power of the whole machine is greater than 85% of the specification</p> <p>LINK/ACT:</p> <p>Off: No link</p> <p>Steady on: Linked</p> <p>Flashing: Transmitting data</p>
Dimensions (W×D×H)	440*245*44mm
Weight	2.90KG
작업 모드	<p>Default (Normal mode) : All ports can communicate with each other, VLAN (Secure mode): Downlink ports can communicate only with uplink ports. Enabling PD keepalive function, the switch will restart the IPC via PoE power when the IPC sends no message in a period of time,</p> <p>Extend (Surveillance mode): Transmission distance up to 250 meters. Downlink ports can communicate only with uplink ports</p>

Compliance	
NDA Compliant	Support

크기

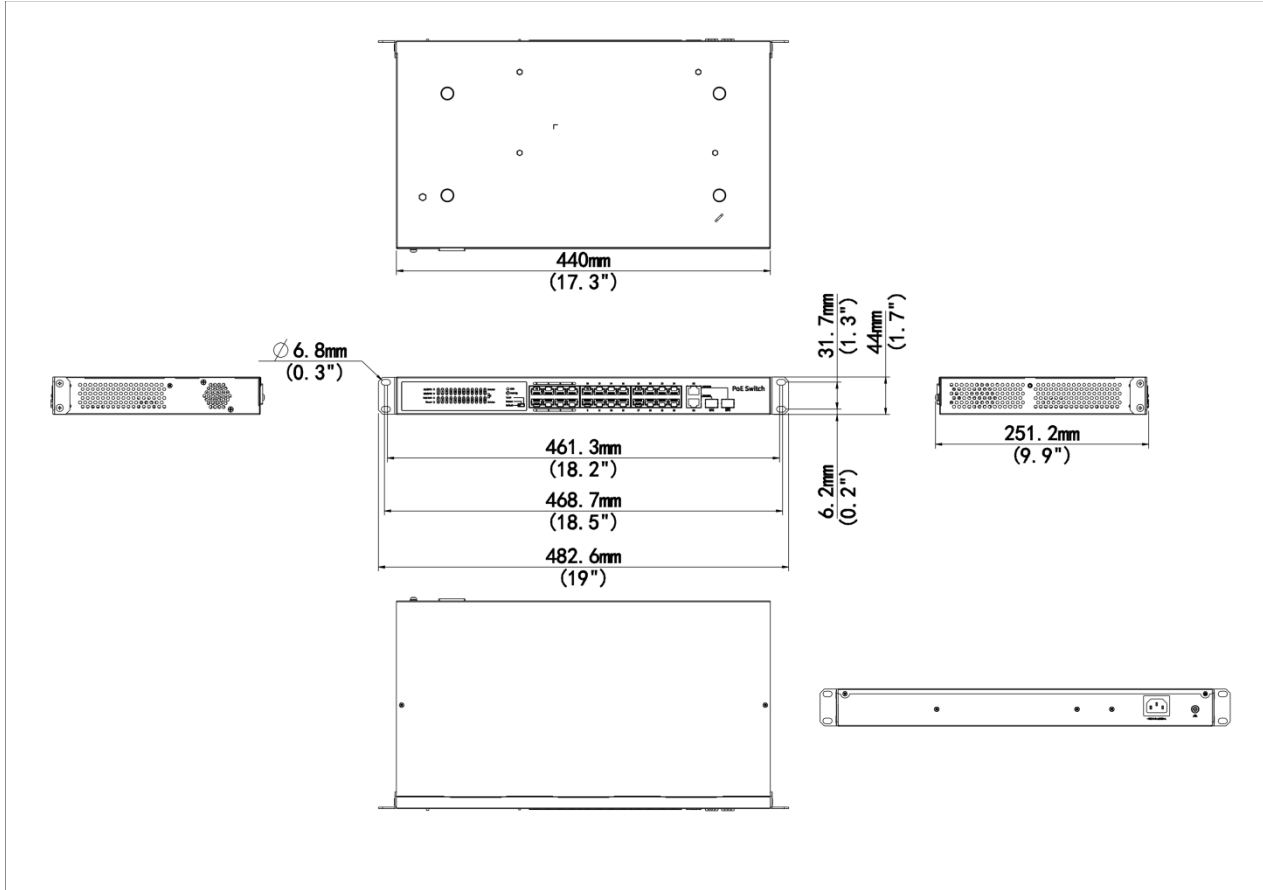

Unlimited New View

浙江宇视科技有限公司

 <http://www.uniview.com>

 overseasbusiness@uniview.com; globalsupport@uniview.com

 South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。