
F-UTP Category 6 Cables

CAB-LC3200B-E4-IN




사양

Model	CAB-LC3200B-E4-IN
Cable	
Product model	CAB-LC3200B-E4-IN
Test Standard	ISO/IEC 11801, TIA-568.2-E 플루크 테스트 90m
Product specification	Cat6 4×2×0.53mm
Packing length	305±1 m
Crossing backbone	Yes
Rip-cord	Yes
Ambient temperature	-20℃～60℃
Conductor	
AWG	24
Nom.O.D.(mm)	0.53±0.01 mm
DC resistance	≤95 Ω/km
Material	순수 구리
Insulation	
Diameter	1.06±0.05 mm
Material	HDPE
Thickness	0.26 ± 0.01 mm

Color	Blue/White- Blue, Green/White-Green,Orange/White-Orange,Brown/White-Brown
Sheath	
Material	PVC
External O.D.	7.2±0.5 mm
Tensile strength	>13.5Mpa
Thickness	0.55±0.05 mm
Color	오렌지
Surface Printing	
Color	검정
Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Packing	
Packing	우든 샤프트
Shield	
Overall Shield	AL-마일라 100% 피복
Drain Wire	1*0.4mm TC

크기

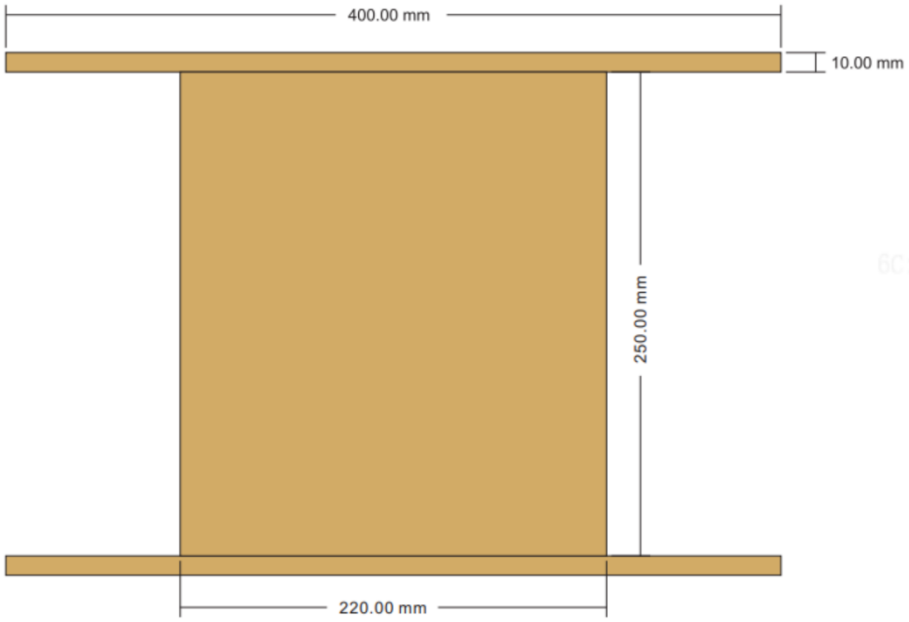

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.