

Wall Mounted Keyboard Card Reader

OEC-R3H-MEK



Overview

OEC-R3H-MEK is a contactless card reader with a keypad. It features high receiving sensitivity and low working current, applicable to scenarios such as access control, attendance, etc.

Features


- Support Wiegand/RS485 data output.
- Built-in buzzer.
- Supports indoor and outdoor application.
- Stable, sensitive, and responsive.
- Supports ISO 14443-A and ISO 14443-B protocols.

Specifications

Model	OEC-R3H-MEK
Hardware Specification	
Operating Frequency	13.56 MHz, 125 KHz
Interface	1 x Wiegand (supports 26/34 DIP switch selection, default Off is 34, On is 26), 1 x RS485
Dimensions (L x W x H)	128.8 x 88 x 25.7 mm
Weight	145g
Mount Method	115 x 73mm junction box (120 box), 86*86mm junction box
Operating Temperature	-30°C to 65°C
Operating Humidity	10% to 90%
Storage Temperature	-40°C to 65°C
Indicator	Steady blue: Normal operation

Power Consumption	1.4 W
Operating Voltage	DC 12V $\pm$ 25%
Operating Current	112 mA
Reading Distance	EM card: max.3cm Large IC card: max. 3cm Small IC card: max. 1cm
Authentication Mode	Card, Password
Protection Level	IP65
Mifare Card Control	Configure card reading (sector number, block number, sector offset, length, access key) information via 485
DIP Switch	8-bit Bit 1-4: 485 address bits (default 0000; 0 is Off, 1 is On). Bit 5: Mode switch (Off for Wiegand, On for 485). Bit 6: Wiegand protocol (default Off for Wiegand 34, On for Wiegand 26). Bit 7: Termination resistor (default Off for disabled, On for enabled). Enable when 485 line distance is long or interference is strong. Bit 8: Reserved.
Upgrade	Supports software upgrade via 485 interface
Tamper Alarm	Support, continuous rapid "beep" alarm
Physical	
Material	Rigid PC
Basic Business	
Reading Time	< 1s
Card Type	EM card, Mifare card

Dimensions

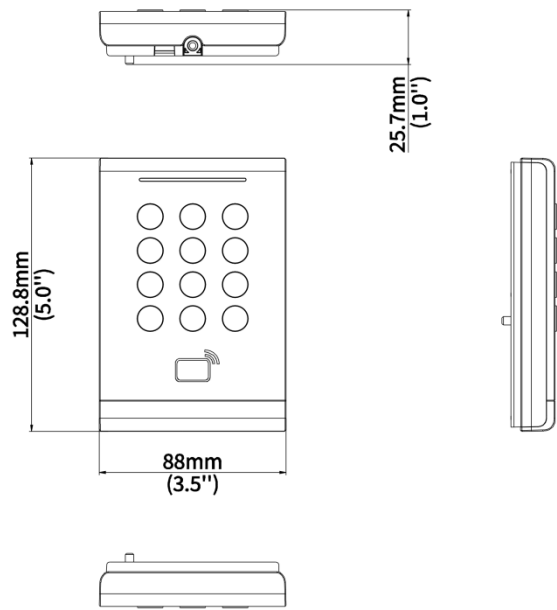

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.