


## 4MP ColorHunter with Wise-ISP Fixed Bullet Network Camera IPC2314LE-ADF28(40)KM-WP

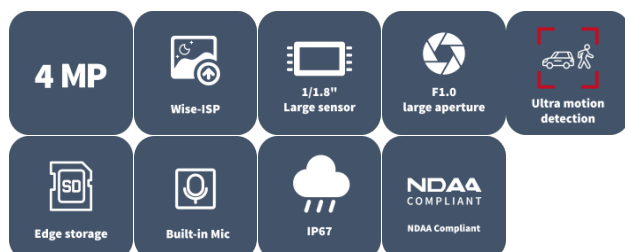

## Features

- High quality image with 4 MP, 1/1.8" CMOS sensor and F1.0 large aperture lens
- 4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG
- Supports ColorHunter with Wise-ISP technology, deeply optimizing color, detail, and smear effects in extremely low-light scenes
- 120 dB true WDR technology enables clear image in strong light scene
- Supports 9:16 corridor mode
- Built-in mic
- White light, up to 30 m (98.4 ft.) warm light distance
- MicroSD, up to 512 GB
- IP67 protection
- Supports PoE power supply
- 3-axis


## Specifications

| Model                              | IPC2314LE-ADF28KM-WP                                                                                                                                                                                                                                  |  | IPC2314LE-ADF40KM-WP |  |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------|--|
| Camera                             |                                                                                                                                                                                                                                                       |  |                      |  |
| Max Resolution                     | 4 MP                                                                                                                                                                                                                                                  |  |                      |  |
| Sensor                             | 1/1.8" CMOS                                                                                                                                                                                                                                           |  |                      |  |
| Min. Illumination                  | Color: 0.0003 Lux (F1.0, AGC ON)                                                                                                                                                                                                                      |  |                      |  |
| Shutter                            | Auto/Manual, 1 ~ 1/100000s                                                                                                                                                                                                                            |  |                      |  |
| Adjustment Angle                   | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°                                                                                                                                                                                                  |  |                      |  |
| S/N                                | >52 dB                                                                                                                                                                                                                                                |  |                      |  |
| WDR                                | 120 dB                                                                                                                                                                                                                                                |  |                      |  |
| Lens                               |                                                                                                                                                                                                                                                       |  |                      |  |
| Focal Length                       | 2.8 mm                                                                                                                                                                                                                                                |  | 4.0 mm               |  |
| Iris Type                          | Fixed                                                                                                                                                                                                                                                 |  |                      |  |
| Iris                               | F1.0                                                                                                                                                                                                                                                  |  |                      |  |
| Field of View (H)                  | 124.3°                                                                                                                                                                                                                                                |  | 96.1°                |  |
| Field of View (V)                  | 64.1°                                                                                                                                                                                                                                                 |  | 52.2°                |  |
| Field of View (D)                  | 135.0°                                                                                                                                                                                                                                                |  | 113.5°               |  |
| DORI                               |                                                                                                                                                                                                                                                       |  |                      |  |
| DORI Distance (Lens)               | 2.8 mm                                                                                                                                                                                                                                                |  | 4 mm                 |  |
| DORI Distance (Detect)             | 43.4 m (142.4 ft.)                                                                                                                                                                                                                                    |  | 62.1 m (203.7 ft.)   |  |
| DORI Distance (Observe)            | 17.4 m (57.1 ft.)                                                                                                                                                                                                                                     |  | 24.8 m (81.4 ft.)    |  |
| DORI Distance (Recognize)          | 8.7 m (28.5 ft.)                                                                                                                                                                                                                                      |  | 12.4 m (40.7 ft.)    |  |
| DORI Distance (Identify)           | 4.3 m (14.1 ft.)                                                                                                                                                                                                                                      |  | 6.2 m (20.3 ft.)     |  |
| Illuminator                        |                                                                                                                                                                                                                                                       |  |                      |  |
| Supplemental Light                 | Warm light                                                                                                                                                                                                                                            |  |                      |  |
| Light On/Off Control               | Auto/Manual                                                                                                                                                                                                                                           |  |                      |  |
| Illumination Distance (Warm Light) | 30 m (98.4 ft.)                                                                                                                                                                                                                                       |  |                      |  |
| Video                              |                                                                                                                                                                                                                                                       |  |                      |  |
| Video Compression                  | Ultra 265, H.265, H.264, MJPEG                                                                                                                                                                                                                        |  |                      |  |
| H.264 Code Profile                 | Baseline profile, Main profile, High profile                                                                                                                                                                                                          |  |                      |  |
| Frame Rate                         | Main Stream: 4 MP (2688 × 1520), max. 25 fps; 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps;<br>Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; |  |                      |  |
| Video Bit Rate                     | 128 Kbps to 6144 Kbps                                                                                                                                                                                                                                 |  |                      |  |
| U-code                             | Support                                                                                                                                                                                                                                               |  |                      |  |
| OSD                                | Up to 4 OSDs                                                                                                                                                                                                                                          |  |                      |  |
| Privacy Mask                       | Up to 4 areas                                                                                                                                                                                                                                         |  |                      |  |
| ROI                                | Up to 8 areas                                                                                                                                                                                                                                         |  | Support              |  |
| Video Stream                       | Dual streams                                                                                                                                                                                                                                          |  |                      |  |
| Image                              |                                                                                                                                                                                                                                                       |  |                      |  |
| White Balance                      | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2                                                                                                                                                                                                  |  |                      |  |

|                                   |                                                                                                                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smart Illumination                | Support                                                                                                                                                                                                    |
| Digital Noise Reduction           | 2D/3D DNR                                                                                                                                                                                                  |
| Flip                              | Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise                                                                                                                            |
| Dewarping                         | N/A                                                                                                                                                                                                        |
| HLC                               | Support                                                                                                                                                                                                    |
| BLC                               | Support                                                                                                                                                                                                    |
| Defog                             | Digital defog                                                                                                                                                                                              |
| <b>Intelligent</b>                |                                                                                                                                                                                                            |
| Smart Intrusion Prevention (Lite) | Intrusion, crossline detection (both detection are based on human body and vehicle detection)                                                                                                              |
| <b>Events</b>                     |                                                                                                                                                                                                            |
| Basic Detection                   | Motion detection, Ultra motion detection, Tampering alarm, Audio detection                                                                                                                                 |
| General Function                  | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication                                                                              |
| <b>Audio</b>                      |                                                                                                                                                                                                            |
| Audio Compression                 | G.711U, G.711A                                                                                                                                                                                             |
| Audio Bitrate                     | 64 Kbps                                                                                                                                                                                                    |
| Two-way Audio                     | N/A                                                                                                                                                                                                        |
| Suppression                       | Support                                                                                                                                                                                                    |
| Sampling Rate                     | 8 kHz                                                                                                                                                                                                      |
| <b>Storage</b>                    |                                                                                                                                                                                                            |
| Edge Storage                      | MicroSD, up to 512 GB                                                                                                                                                                                      |
| Network Storage                   | ANR, NAS (NFS)                                                                                                                                                                                             |
| <b>Network</b>                    |                                                                                                                                                                                                            |
| Protocols                         | IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS                                                        |
| Compatible Integration            | ONVIF (Profile S, Profile G, Profile T), API, SDK                                                                                                                                                          |
| User/Host                         | Up to 32 users, 2 user levels: administrator and common user                                                                                                                                               |
| Security                          | Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Client                            | EZStation, APP                                                                                                                                                                                             |
| Web Browser                       | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+                                                                           |
| <b>Interface</b>                  |                                                                                                                                                                                                            |
| Audio I/O                         | N/A                                                                                                                                                                                                        |
| Alarm I/O                         | N/A                                                                                                                                                                                                        |
| Serial Port                       | N/A                                                                                                                                                                                                        |
| Built-in Mic                      | Support                                                                                                                                                                                                    |
| Built-in Speaker                  | N/A                                                                                                                                                                                                        |
| WIFI                              | N/A                                                                                                                                                                                                        |
| Network                           | 1 × RJ45 10 M/100 M Base-TX Ethernet                                                                                                                                                                       |
| Video Output                      | N/A                                                                                                                                                                                                        |

| Certification       |                                                                                                                                                  |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC                 | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035)<br>FCC (FCC 47 CFR part15 B)                                                         |
| Safety              | CE LVD (EN 62368-1)<br>UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)                                                                            |
| Environment         | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);                                                                                            |
| Protection          | IP67 (IEC 60529)                                                                                                                                 |
| General             |                                                                                                                                                  |
| Power               | DC 12 V±25%, PoE (IEEE 802.3af)                                                                                                                  |
| Power Consumption   | Max. 3.2 W                                                                                                                                       |
| Power Interface     | Ø5.5 mm coaxial power plug                                                                                                                       |
| Dimensions          | 206 mm × 73 mm × 73 mm (8.1" × 2.9" × 2.9") (L × W × H)                                                                                          |
| Weight              | 0.46 kg (1.01 lb.)                                                                                                                               |
| Material            | Graphene + Metal                                                                                                                                 |
| Working Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)                                                                          |
| Storage Environment | -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)                                                                          |
| Surge Protection    | 4 KV                                                                                                                                             |
| Reset Button        | Support                                                                                                                                          |
| Web Client Language | 13 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian |

## Dimensions

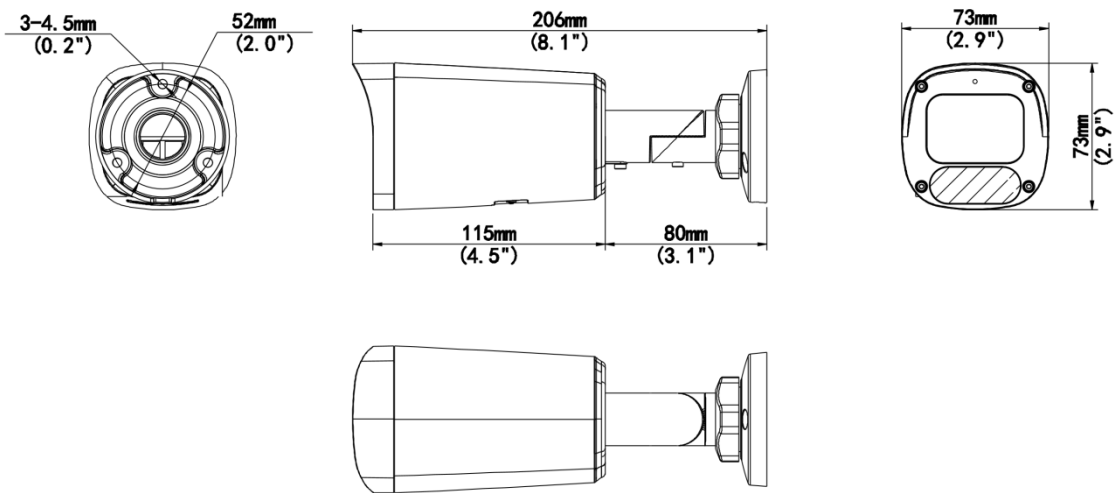

## Accessories

### TR-JB05-B-IN

Small Bullet Junction Box(Elegant White)



### TR-A01-IN

NPT 3/4" Waterproof Cable Gland




### TR-UP06-C-IN-V2

Pole Mounting Bracket for Bullet Junction  
Box Only



### TR-UC08-C-V2

Bullet&Dome Corner Mounting Bracket



# Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。