

4MP ColorHunter Fixed Bullet Analog Camera UAC-B134-ADF28(40)MS-W



Overview

UAC-B134-ADF28(40)MS-W is a 4MP ColorHunter fixed bullet analog camera with a high-performance 1/1.8-inch CMOS sensor and 3D noise reduction technology. It supports flexible switch among TVI/AHD/CVI/CVBS through DIP switches, effectively enhancing product adaptability and diversity of networking solutions. With SYV-75-3 or other coaxial cable types, the camera can achieve low-cost, long-distance, and anti-interference mega-pixel HD video transmission without time delay. It supports audio input, synchronous transmission of audio and video, and provides 24/7 color images.

Features


- High quality image with 4MP, F1.0 large aperture lens
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- 3D noise reduction technology delivers clean and sharp images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages
- Built-in microphone for high quality audio transmission via coaxial cables
- 120dB true WDR technology enables clear image in strong light scene

Specifications

Model	UAC-B134-ADF28MS-W		UAC-B134-ADF40MS-W
Camera			
Max Resolution	4 MP		
Sensor Size	1/1.8" CMOS		
Min. Illumination	0.0005 lux (F1.0, AGC ON) 0 lux (white light on)		
Lens			
Focus	2.8 mm	4.0 mm	
Lens Mount	M16		
Angle of View (H)	105.9°	89.5°	
Angle of View (V)	57.1°	48.0°	
Angle of View (D)	125.0°	105.9°	
Illuminator			
Illuminator Number	Two white-light illuminators		
Illumination Distance	40m		
Lifetime	≥ 60000 hours		
Video			
Resolution	4MP: 2560 (H) × 1440 (V) 1080P: 1920 (H) × 1080 (V)		
Frame Rate	CVI: 4MP@25fps (default), 4MP@30fps,1080P@25fps, 1080P@30fps AHD: 4MP@25fps, 4MP@30fps,1080P@25fps, 1080P@30fps TVI: 4MP@15fps, 4MP@25fps, 4MP@30fps,1080P@25fps, 1080P@30fps CVBS: PAL, NTSC		
Shutter Time	PAL: 1/25s-1/50000s, NTSC: 1/30s-1/50000s		
Image			
Exposure Mode	Four modes: Global (default), BLC, HLC, WDR		
Day/Night	24/7 color images		
Digital Noise Reduction	2D/3D		
White Balance	Two modes: Auto (default), Manual		
WDR	120 dB WDR		
Flip	Supports 180°horizontal flip, 180°vertical flip		
Digital Defog	N/A		
Audio			
Built-in Mic	Support		
Camera Audio	CVI: 4MP@25fps, 4MP@30fps, 1080P@25fps, 1080P@30fps		
Interface			
Power Interface	5.5 mm Power Interface		
Video Output	BNC, supports TVI/AHD/CVI/CVBS		
Operating Environment			
Temperature	-30 °C to 60 °C (-22 °F to 140 °F)		

Humidity	≤ 95% RH (non-condensing)
Surge Protection	4kV for power&4kV for video output interfaces
General	
Power	DC 12 V ± 25%
Power Consumption	MAX 6.8W
Mount	Corner Mount&Pole Mount
Dimensions	206mm*73mm*73mm (L*W*H)
Material	Graphene + Metal
Weight	463g(1.02lb)

Dimensions

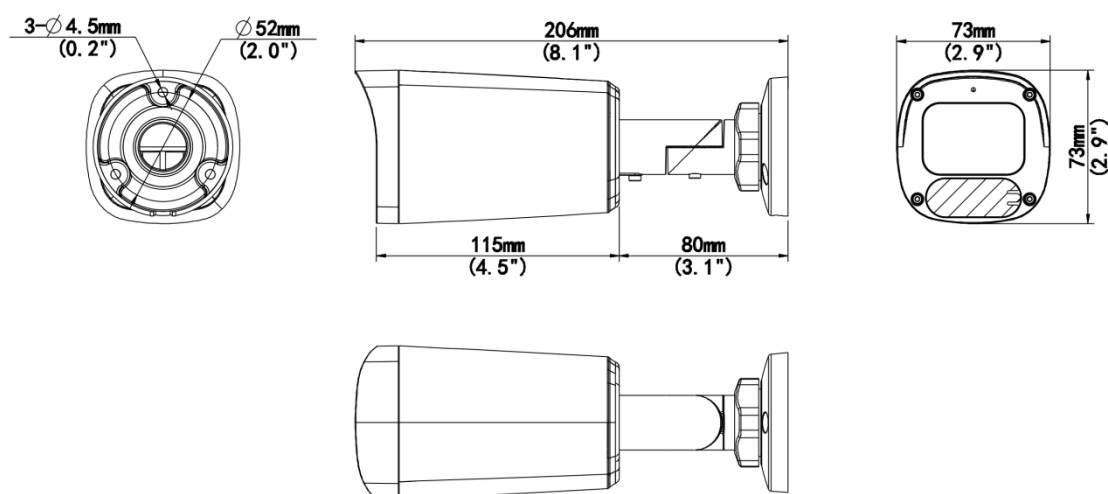

Accessories

TR-JB05-B-IN

Small Bullet Junction Box(Elegant White)



TR-A01-IN

NPT 3/4" Waterproof Cable Gland




TR-UP06-C-IN-V2

Pole Mounting Bracket for Bullet Junction Box Only



TR-UC08-C-V2

Bullet&Dome Corner Mounting Bracket



PWR-DC1201A-UK

DC12V/1A Wall Plug British Standard
Power Adapter



PWR-DC1201B-UK

UNV DC12V/1A Wall Plug British Standard
Power Adapter(Colorful Bag)



PWR-DC1201A-US

DC12V/1A Wall Plug American Standard
Power Adapter



PWR-DC1201B-US

UNV DC12V/1A Wall Plug American
Standard Power Adapter(Colorful Bag)



PWR-DC1201A-EU

DC12V/1A Wall Plug European Standard
Power Adapter



PWR-DC1201B-EU

UNV DC12V/1A Wall Plug European
Standard Power Adapter(Colorful Bag)



PWR-DC1201A-IND

UNV DC12V/1A Wall Plug Indian
Standard Power Adapter-Colorful Bag



Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.