

Ethernet PoE Switches Datasheet

SW-2110-LP



Features


- Multiple working modes to address your business needs: Normal, Secure and Surveillance
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

Specifications

Model	SW-2110-LP
Hardware Specification	
Ports Type	10×100Mbps network ports (RJ45), including 8 PoE ports
Switching capacity	2 Gbps
Power Supply	DC 48/51V, powered by adapter(AC 100 to 240V)
Forwarding performance	1.49Mpps
MAC	1K
PoE Standard	IEEE 802.3af, IEEE 802.3 at
Packet Buffer	448K bit
PoE Mode	ModeB (4578)
Max.PoE Power	Max capacity:60W

	Max capacity for single port: 30W
Prior Ports	1 to 2
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Cooling Fans	0
Max.Power	65W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	POWER: Steady on: AC input is normal Off: No AC input No PoE Indicator PoE-MAX: off : The POE power supply power of the whole machine is less than 80% of the specification Steady on : The POE power supply power of the whole machine is greater than 85% of the specification LINK/ACT: Off: No link Steady on: Linked Flashing: Transmitting data
Dimensions (W×D×H)	171 × 101 × 25.5 mm
Weight	0.29KG
Working Mode	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters
Compliance	
NDAA Compliant	Support

Dimensions

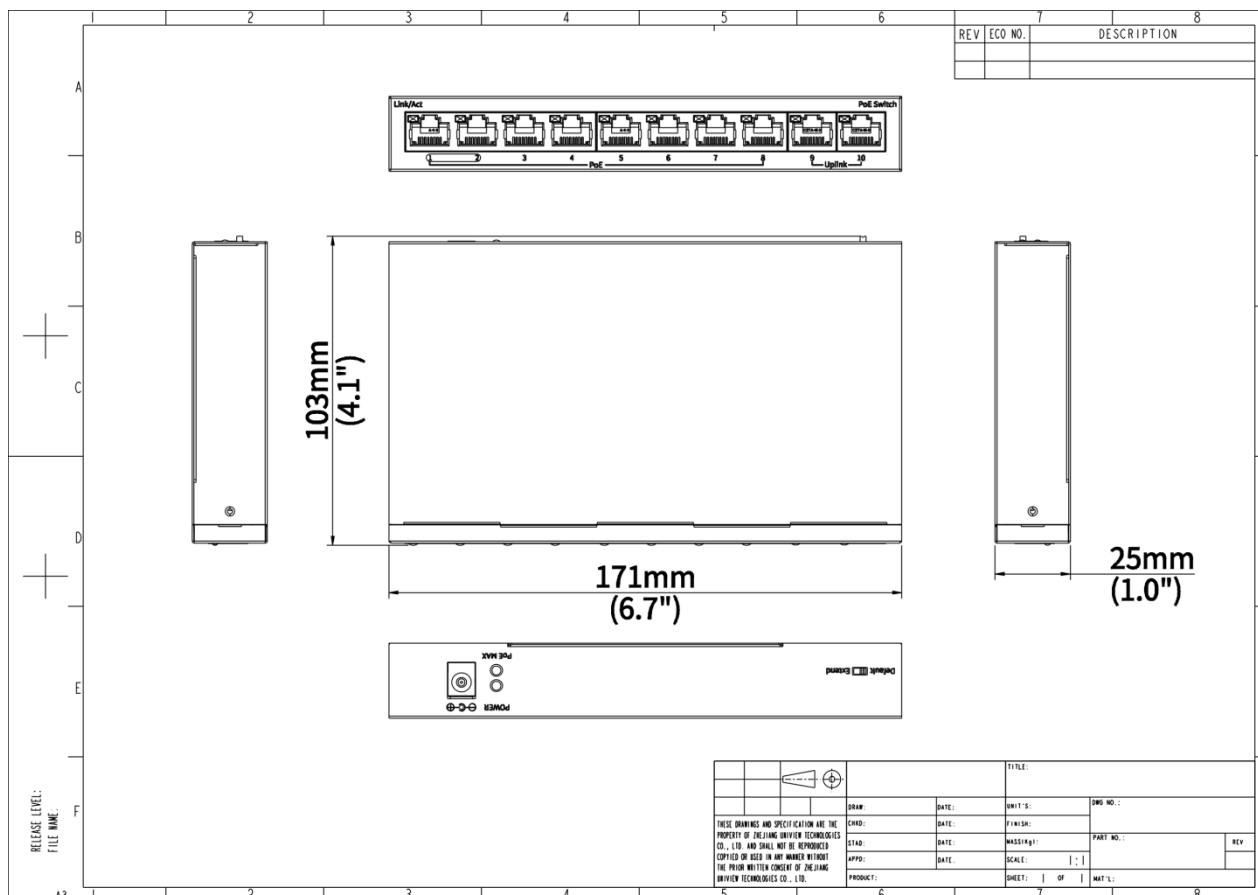

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.