

## Unmanaged Ethernet PoE Switches

# NSW2020-6T-POE-IN-V2



## Features


- Multiple working modes to address your business needs: Default (Normal mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

## Specifications

Model	NSW2020-6T-POE-IN-V2
Hardware Specification	
Ports Type	6×100Mbps network ports (RJ45), including 4 PoE ports
Switching capacity	1.2 Gbps
Packet Buffer	570K bit
Forwarding performance	0.90Mpps
Power Supply	AC: 100 to 240V, 50/60Hz
MAC	2K
PoE Standard	IEEE 802.3 at, IEEE 802.3af
PoE Mode	ModeA (1236), ModeB (4578)
Max.PoE Power	Max capacity:65W Max capacity for single port: 30W
Prior Ports	1 to 2

Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Cooling Fans	0
Max.Power	75W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	<p>Power:            Off: Abnormal power input            Green: Normal power input            Yellow: The total PoE power is higher than 85% of the total power of the device</p> <p>No PoE Indicator            No PoE-Max Indicator</p> <p>LINK/ACT:            Off: No link            Steady on: Linked            Flashing: Transmitting data</p>
Dimensions (W×D×H)	169*132*40mm
Weight	0.65KG
Working Mode	Default (Normal mode) : All ports can communicate with each other, Extend (Surveillance mode): Transmission distance up to 250 meters. Downlink ports can communicate only with uplink ports
Compliance	
NDAA Compliant	Support

## Dimensions

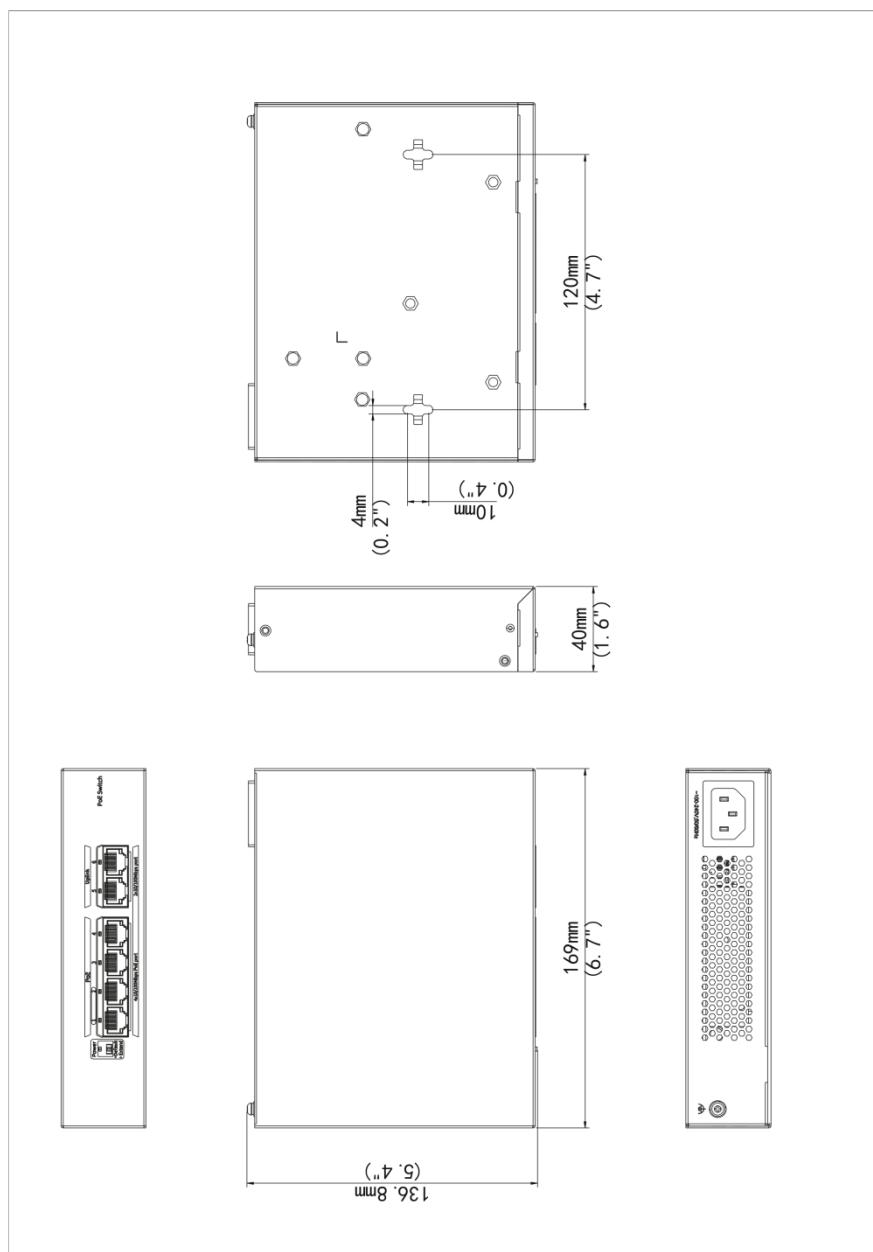

浙江宇视科技有限公司

 <http://www.uniview.com>

 [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

 South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.