


UTP Category 6 Cables

UV-UTP6-300-BC24AWG-DCA-B-W

## Section View

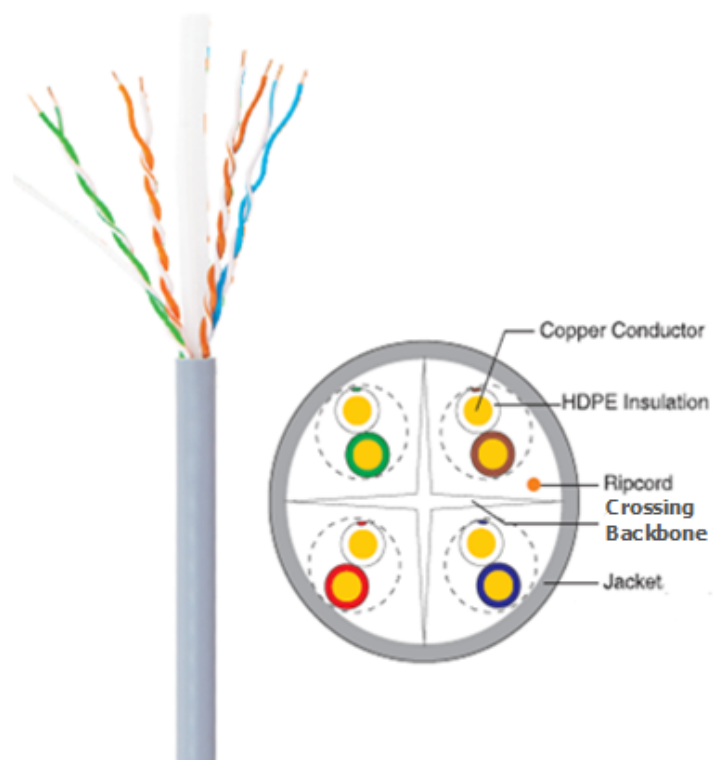

## Specifications

Model	UV-UTP6-300-BC24AWG-DCA-B-W
<b>Cable</b>	
Product model	UV-UTP6-300-BC24AWG-DCA-B-W
Product specification	Cat6. U/UTP. 4×2×0.53mm CPR Dca
Test Standard	ISO/IEC11801 ED.2 ANSI/TIA-568-C.2
Packing length	305±1 m
Rip-cord	Yes
Crossing backbone	Yes
Ambient temperature	-20°C~75°C
<b>Conductor</b>	
Material	OFC
AWG	24
Nom.O.D.(mm)	0.53±0.005 mm
DC resistance	≤95Ω/km
<b>Insulation</b>	
Material	HDPE
Thickness	0.21+0.03mm
Diameter	0.95±0.05 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown
<b>Pitch</b>	
Offset pitch	≤25mm
Cable pitch	≤120mm
<b>Sheath</b>	
Material	LSZH (EN13501-6 DCA)
Fire Resistance	CPR Dca
External O.D.	5.7±0.3 mm
Thickness	0.55±0.15 mm
Color	White
Tensile strength	>10 Mpa
<b>Surface Printing</b>	
Letter height	3.0±0.3 mm
Print error / Space	1±0.005 m
Color	Black
<b>Packing</b>	
Packing	Box
Once packing dimension	380mm*220mm*380mm

## Ordering Info


Product Model	Description
UV-UTP6-300-BC24AWG-DCA-B-W	Cat6(UTP),305m,Overseas

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.

 <http://www.uniview.com>

 [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

 No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.