
4MP Owlview lite Wise-ISP 고정형 웜 라이트 불릿 네트워크 카메라

# IPC2314LE-ADF28(40)K-WP-L2



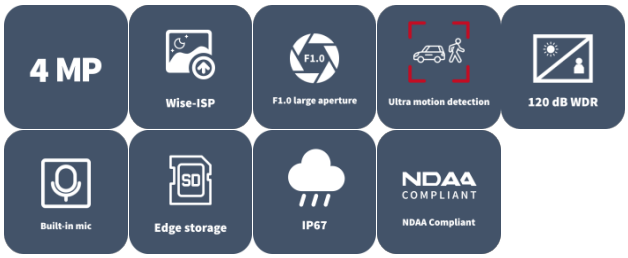


## 주요 특징

- 4MP, 1/1.8" CMOS 센서와 F1.0 대구경 렌즈로 고화질 이미지 제공
- 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG (서브 스트림 전용)
- Wise-ISP 기술 지원, 극저조도 환경에서 색상, 디테일 및 스미어 효과를 깊이 최적화
- Ultra 모션 감지(사람/차량 감지) 지원
- 120dB 트루 WDR 기술로 강한 조명 환경에서도 선명한 이미지 구현
- 9:16 복도 모드 지원
- 내장 마이크
- 웜 라이트, 최대 30m(98.4ft) 웜 라이트 거리

- MicroSD, 최대 512GB 지원
- IP67 보호 등급
- PoE 전원 공급 지원

# 사양

| Model | IPC2314LE-ADF28K-WP-L2 | IPC2314LE-ADF40K-WP-L2 |
|---|---|---|
| 카메라 | | |
| 최대 해상도 | 4 MP | |
| 센서 | 1/1.8" CMOS | |
| 최저 조도 | Color: 0.0003 Lux (F1.0, AGC ON) | |
| 셔터 | Auto/Manual, 1 to 1/100000 s | |
| 조정 각도 | Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360° | |
| S/N | > 52 dB | |
| WDR | 120 dB | |
| 렌즈 | | |
| 초점 거리 | 2.8 mm | 4.0 mm |
| 아이리스 | F1.0 | |
| 화각(수평) | 103.7 ° | 90.8 ° |
| 화각(수직) | 57.2 ° | 48.5 ° |
| 화각(사각) | 117.9 ° | 104.3 ° |
| 렌즈 유형 | Fixed | |
| Iris Type | Fixed | |
| DORI | | |
| DORI 거리(렌즈) | 2.8 mm | 4.0 mm |


| | | |
|---|---|---|
| DORI 거리(감지) | 43.4 m (142.5 ft.) | 62.1 m (203.6 ft.) |
| DORI 거리(관찰) | 24.6 m (80.6 ft.) | 24.8 m (81.4 ft.) |
| DORI 거리(인식) | 12.3 m (40.3 ft.) | 12.4 m (40.7 ft.) |
| DORI 거리(식별) | 6.1 m (20.2 ft.) | 6.2 m (20.4 ft.) |
| 조명 | | |
| 조명 거리(웜라이트) | 30 m (98.4 ft.) | |
| 조명 켜기/끄기 제어 | Auto/Manual | |
| 비디오 | | |
| 비디오 압축 | Ultra 265, H.265, H.264, MJPEG (Sub Stream Only) | |
| H.264 코드 프로파일 | Baseline profile, Main profile, High profile | |
| 프레임 속도 | Main Stream: 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps;<br>Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps | |
| 비디오 비트 전송률 | 128 Kbps to 6144 Kbps | |
| U-code | Support | |
| OSD | Up to 4 OSDs | |
| 프라이버시 마스크 | Up to 4 areas | |
| ROI | Up to 8 areas | |
| 비디오 스트림 | Dual streams | |
| 이미지 | | |
| 스마트 조명 | Support | |
| 화이트 밸런스 | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2, Area white balance | |
| 디지털 노이즈 제거 | 2D/3D DNR | |
| 이미지 회전 | Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise | |

| | |
|---|---|
| 디워핑 | N/A |
| HLC | Support |
| BLC | Support |
| 디포그 | Digital defog |
| 이벤트 | |
| 기본 감지 | Motion detection, Ultra motion detection (based on human body and vehicle detection), Tampering alarm, Audio detection |
| 기본 기능 | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication |
| 오디오 | |
| 오디오 압축 | G.711U, G.711A, AAC-LC |
| 오디오 비트레이트 | G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps |
| 양방향 오디오 | N/A |
| 억제 | Support |
| 샘플링 주파수 | G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz |
| 저장 장치 | |
| 엣지 스토리지 | MicroSD, up to 512 GB |
| 네트워크 스토리지 | ANR, NAS (NFS) |
| 네트워크 | |
| 프로토콜 | IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS |
| 호환성 통합 | ONVIF (Profile S, Profile G, Profile T), API, SDK |
| 사용자/호스트 | Up to 32 users. 3 user levels: administrator, common user and operator |
| 보안 | Password protection, Strong Password, HTTPS encryption, Export operation logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| 고객 | EZStation, APP |

| | | |
|---|---|---|
| 웹 브라우저 | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+ | |
| 인터페이스 | | |
| 오디오 I/O | N/A | |
| 알람 I/O | N/A | |
| 시리얼 포트 | N/A | |
| 내장 마이크 | Support | |
| 내장 스피커 | N/A | |
| WIFI | N/A | |
| 네트워크 | 1 × RJ45 10 M/100 M Base-TX Ethernet | |
| 비디오 출력 | N/A | |
| 인증 | | |
| EMC | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4)<br>FCC (FCC 47 CFR part15 B) | |
| 안전성 | CE-LVD (EN 62368-1)<br>UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1) | |
| 환경 | CE-RoHS (2011/65/EU ; (EU) 2015/863) ; WEEE (2012/19/EU) | |
| 보호 | IP67 (IEC 60529) | |
| 일반 | | |
| 전원 | DC 12 V±25%, PoE (IEEE 802.3af) | |
| 전력 소비량 | Max. 3.1 W | |
| 전원 인터페이스 | Ø5.5 mm coaxial power plug | |
| 크기 | 197.8 mm × 73.0 mm × 72.9 mm (7.8" × 2.9" × 2.9") (L × W × H) | |
| 무게 | 0.28 kg（0.62 lb.） | 0.30 kg（0.66 lb.） |
| 재료 | Graphene + Plastic | |

| | |
|---|---|
| 작업 환경 | -30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing) |
| 저장 환경 | -30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing) |
| 서지 보호 | 4 KV |
| 초기화 버튼 | Support |
| 웹 클라이언트 언어 | 14 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian, Turkish |

# 크기

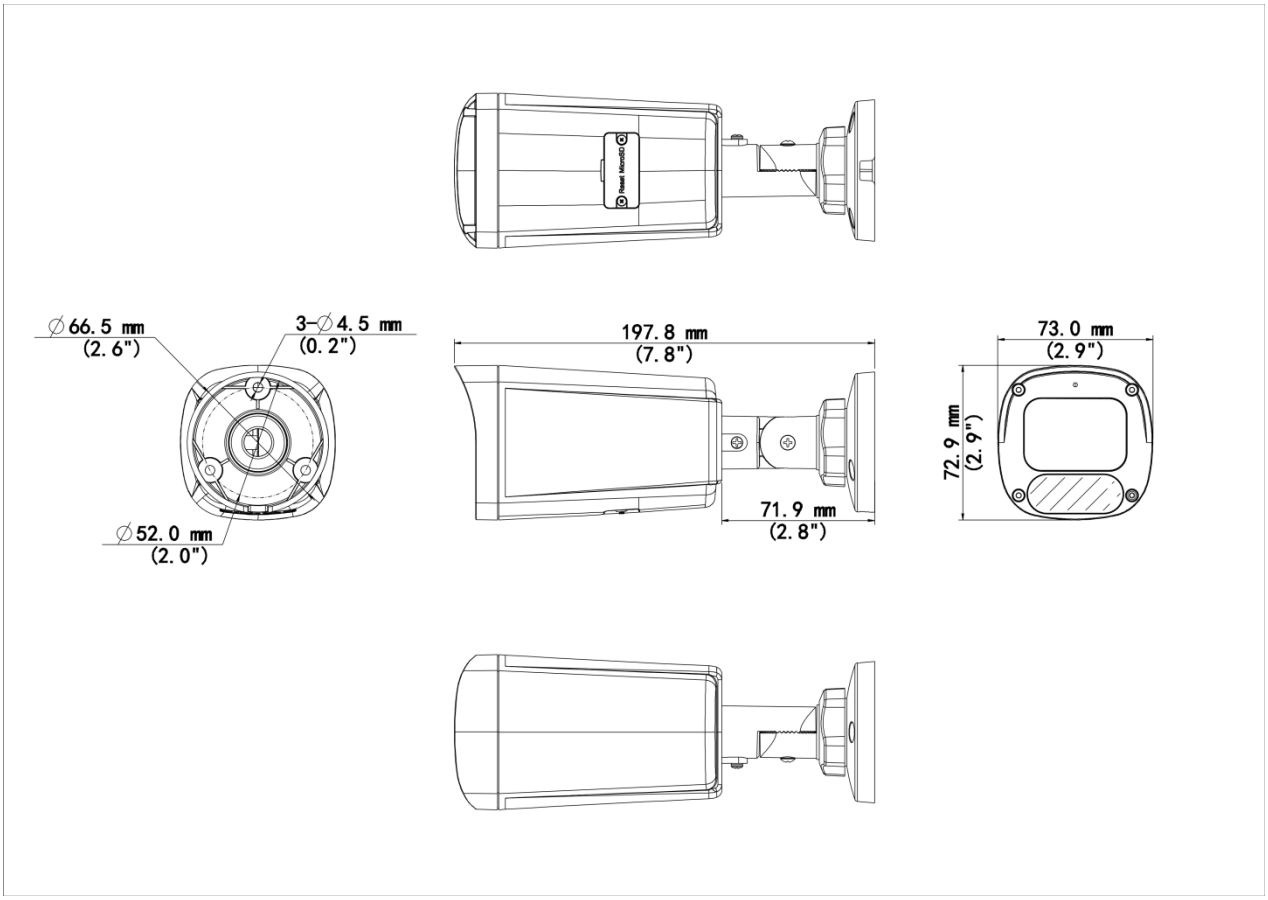

# 액세서리

| TR-JB05-B-IN | TR-UP06-C-IN-V2 | TR-A01-IN |
|---|---|---|
| Small Bullet Junction Box(Elegant White) | Pole Mounting Bracket For Bullet Junction Box Only | NPT 3/4'' Waterproof Cable Gland |
|  |  |  |
| **TR-UC08-C-V2** | | |
| Bullet&Dome Corner Mounting Bracket | | |
|  | | |

# Unlimited New View

**Zhejiang Uniview Technologies Co., Ltd.**

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.