


Unmanaged Ethernet PoE Switches

NSW2020-8T2GT-LPOE-IN

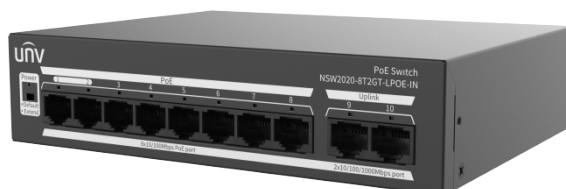

Features

- Multiple working modes to address your business needs: Default (Normal mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

Specifications

Model	NSW2020-8T2GT-LPOE-IN
Hardware Specification	
Ports Type	8×10/100Mbps PoE ports (RJ45), 2×10/100/1000Mbps ports
Switching capacity	5.6 Gbps
Packet Buffer	2 M bit
Forwarding performance	4.17Mpps
Max.PoE Power	Max capacity:65W Max capacity for single port: 30W
Prior Ports	1 to 2
MAC	4K
Cooling Fans	0

Indicator	Power: Off: Abnormal power input. Green: Normal power input. Yellow: The total PoE power is higher than 85% of the total power of the device. LINK/ACT: Off: No link Steady on: Linked Flashing: Transmitting data
Dimensions (W×D×H)	169*132*40mm
Max.Power	75W
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Weight	0.67KG
Operating humidity	10%~90% (non-condensing)
Working Mode	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters

Ordering Info

Product Model	Description
NSW2020-8T2GT-LPOE-IN	Unmanaged Ethernet Switch(PoE)

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.