2MP ColorHunter 고정형 원 라이트 불릿 아날로그 카메라
UAC-B122-AF28(40)M-WL





소개

UAC-B122-AF28(40)M-W는 고성능 1/3.0인치 CMOS 센서를 탑재한 2MP ColorHunter HD 고정형 Mini 불릿 아날로그 카메라. TVI/AHD/CVI/CVBS를 지원하여 제품 적응성과 네트워킹 솔루션의 다양성을 효과적으로 향상 시킴. SYV-75-3 또는 기타 동축 케이블 유형으로 저비용, 장거리, 간섭 방지 메가픽셀 HD 영상 전송을 지연 없이 구현 가능. 오디오 입력, 오디오와 영상의 동시 전송을 지원하며 24시간 컬러 이미지를 제공.

주요 특징

- 2MP 고화질 이미징
- TVI/AHD/CVI/CVBS
- 화이트 라이트 조명 지원, F1.0 조리개로 24시간 컬러 이미지
- 180° 수평 플립, 180° 수직 플립 지원


- OSD 구성 메뉴, 조작이 간편함
- IP67 방수 방진 설계, 높은 신뢰성
- 11개 언어 OSD 구성 메뉴
- 동축 케이블을 통한 고품질 오디오 전송을 위한 내장 마이크
- 디지털 디포그 지원
- 메탈 전면 및 하우징

사양

Model	UAC-B122-AF28M-WL	UAC-B122-AF40M-WL
Camera		
Max Resolution	2 MP	
Sensor Size	1/3.0" CMOS	
Min. Illumination	0.001 lux (F1.0, AGC ON) 0 lux (white light on)	
Lens		
Focus	2.8 mm	4.0 mm
Lens Mount	M12	
Angle of View (H)	97.5°	79.0°
Angle of View (V)	52.8°	44.0°
Angle of View (D)	113.8°	91.8°
Illuminator		
Illuminator Number	Two white-light illuminators	
Illumination Distance	40m	
Lifetime	≥ 60000 hours	
Video		
Resolution	1080P: 1920(H)×1080(V) 720P: 1280(H) ×720(V)	
Frame Rate	TVI: 1080P@25fps (default), 1080P@30fps; 720P@25fps, 720P@30fps AHD: 1080P@25fps, 1080P@30fps; 720P@25fps, 720P@30fps CVI: 1080P@25fps, 1080P@30fps; 720P@25fps, 720P@30fps CVBS: PAL, NTSC	
Shutter Time	PAL: 1/25s-1/50000s， NTSC: 1/30s-1/50000s	
Image		
Exposure Mode	Four modes: Global (default), BLC, HLC, DWDR	
Day/Night	24/7 color images	

Digital Noise Reduction	2D/3D
White Balance	Two modes: Auto (default), Manual
WDR	DWDR
Flip	Supports 180°horizontal flip, 180°vertical flip
Digital Defog	Support
Audio	
Built-in Mic	Support
Camera Audio	TVI: 1080P@25fps, 1080P@30fps CVI: 1080P@25fps, 1080P@30fps
Interface	
Power Interface	5.5 mm Power Interface
Video Output	BNC, supports TVI/AHD/CVI/CVBS
Operating Environment	
Temperature	-30 ℃ to 60 ℃ (-22 ℉ to 140 ℉)
Humidity	≤ 95% RH (non-condensing)
Surge Protection	4kV for power, 4kV for video output interfaces
Ingress Protection	IP67
General	
Power	DC 12 V ± 25%
Power Consumption	MAX 3.0W
Mount	Corner Mount, Pole Mount
Dimensions	157mm*67mm*66mm (L*W*H)
Material	Metal
Weight	284g(0.63lb)
OSD Menu Language	11 Languages: English, German, Spanish (Latin America), French, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Turkish
Certification	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035), FCC (FCC 47 CFR part15 B)
Safety	CE-LVD (EN 62368-1)
Environment	CE-RoHS (2011/65/EU; (EU) 2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529)

크기

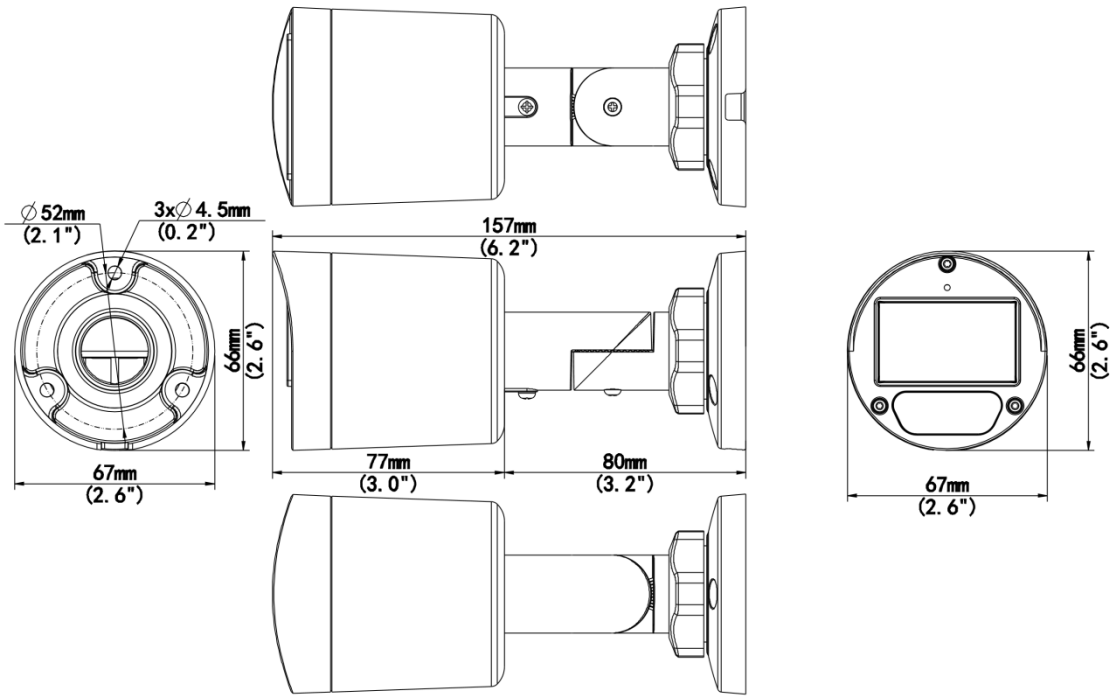

액세서리

TR-A01-IN NPT 3/4'' Waterproof Cable Gland	**TR-JB05-B-IN** Small Bullet Junction Box(Elegant White)	**TR-UP06-C-IN-V2** Pole Mounting Bracket For Bullet Junction Box Only
		
TR-UC08-C-V2 Bullet&Dome Corner Mounting Bracket	**PWR-DC1201A-UK** DC12V/1A Wall Plug British Standard Power Adapter	**PWR-DC1201B-UK** DC12V/1A Wall Plug British Standard Power Adapter(Colorful Bag)
		

PWR-DC1201A-US	PWR-DC1201B-US	PWR-DC1201A-EU
DC12V/1A Wall Plug American Standard Power Adapter	DC12V/1A Wall Plug American Standard Power Adapter(Colorful Bag)	DC12V/1A Wall Plug European Standard Power Adapter
		
PWR-DC1201B-EU	**PWR-DC1201A-IND**	
DC12V/1A Wall Plug European Standard Power Adapter(Colorful Bag)	DC12V/1A Wall Plug Indian Standard Power Adapter-Colorful Bag	
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2025-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.