

KIT/202S/372S/NSW2020

KIT/202S/372S/NSW2020



Features

- **KIT/202S/372S/NSW2020**
- OEU-202S-HMK1
- Optional recess box for recess mount.
- Supports power output, which can be enabled or disabled on the Web interface.
- Metal casing.
- Supports batch configuration.
- Supports call and intercom with the connected indoor stations and UNV Link User.
- Supports video monitoring, security alarm, and tamper alarm.
- Built-in IC card reader.
- OEI-372S-H-W
- ABS casing and glass panel, solid and durable.
- Allows to insert a TF card to expand the storage capacity.
- Supports Wi-Fi.
- Supports touchscreen operation.
- 1024 x 600 HD screen.
- Supports remote door opening by sending signal to the door station.
- Allows to view live video of connected door stations and network cameras.
- NSW2020-6T-POE-IN
- Allows to switch operating modes, including Default and Extend.
- Supports network extension. With a high-quality network cable and IPC, the network transmission distance can reach up to 250 meters by lowering the network port rate to 10Mbps.
- Supports port priority. Packets from high-priority ports will be forwarded first.
- Supports flow control. When there is data congestion in the uplink ports, the switch will actively send flow control frames to PoE

ports.

- Plug-and-play, simple and convenient.
- All metal casing, secure and reliable.
- **NSW2020-6T-POE-IN**
- Multiple working modes to address your business needs: Default(Normal mode), EXTEND(Surveillance mode)
- Support port traffic control
- Up to 250m transmission distance on Extend mode
- Support buffer optimization
- All metal housing, safe and reliable
- **OEI-372S-H-W**
- Durable ABS casing with a glass panel.
- 1024×600 HD touchscreen display.
- Batch configuration and transfer.
- Remote and one-touch unlocking of linked door stations.
- Network camera monitoring and security alarm.
- **OEU-202S-HMK1**
- Optional recess box for recess mount.
- Supports power output, which can be enabled or disabled on the Web interface.
- Metal casing.
- Supports batch configuration.
- Supports call and intercom with the connected indoor stations and UNV Link User.
- Supports video monitoring, security alarm, and tamper alarm.
- Built-in IC card reader.

Specifications

▪ NSW2020-6T-POE-IN

Model	NSW2020-6T-POE-IN
Hardware Specification	
Ports	6 ports
Ports Type	6×100Mbps network ports (RJ45), including 4 PoE ports
Ports Rate	100Mbps
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Switching capacity	1.2Gbps
Packet Buffer	448K bit
Forwarding performance	0.90Mpps
MAC	1K
Prior Ports	1~2
Power Supply	DC: 48/51V, powered by adapter (AC100-240V, 50/60Hz)
PoE	support POE
Max. PoE Power	Max capacity: 60W, Max capacity for single port: 30W
Storage Temperature	-40 °C ~ 70 °C
Operating humidity	10%~90% (noncondensing)

Cooling Fans	0
Weight	0.19KG
Dimensions (W×D×H)	107*101*25mm
Storage humidity	5%~90% (noncondensing)
Operating temperature	0 °C ~ 40 °C (32 °F ~ 104 °F)
Indicator	POWER Steady on: AC input is normal, POWER Off: No AC input, No PoE Indicator, PoE-MAX off: The POE power supply power of the whole machine is less than 80% of the specification, PoE-MAX Steady on : The POE power supply power of the whole machine is greater than 85% of the specification, LINK/ACT Off: No link, LINK/ACT Steady on: Linked, LINK/ACT Flashing: Transmitting data
Working Mode	Default(Normal mode) : All ports can communicate with each other., EXTEND(Surveillance mode): Transmission distance up to 250 meters.
Max.Power	65W

▪ **OEI-372S-H-W**


Model	OEI-372S-H-W
Hardware Specification	
Power Supply	DC12V±25%,IEEE802.3af, Standard PoE
Power Consumption	<10W
Screen	7-inch ultra-thin TFT LCD screen
Screen Resolution	Screen resolution 1024×600
Operation System	Linux
Audio Quality	Noise suppression, echo cancellation and AGC
Audio Input	1 built-in omnidirectional microphone
Audio Output	1 built-in speaker
Audio Compression Standard	MP3 G711
Audio Compression Bitrate	128Kbps
Interface	Power*1, network*1, WiFi*1, RS485*1, IO output*2, IO input*8, TF card slot*1
Network	100Mbps network port, supports IEEE802.3af PoE power supply,WIFI4、2.4GHZ
Weight	360g
Dimensions (L x W x H)	193mm×143mm×25mm
Operating Environment	-10°C to +55°C, 10% to 90%, non-condensing, indoor
Basic Business	
Protocol	UNV private protocol
Network protocol	TCP/IP, IPv4, HTTP, RTP, RTSP, NTP
Specification Index	
Capacity	200 ScreenShots 200 Zone Alarms A total of 20 connected devices, including IPCs, entrance stations, NVRs (up to 2), and Doorbells
Linked Indoor Station Capacity	19 extensions
Compliance	
NDAA Compliant	Support

▪ **OEU-202S-HMK1**

Model	OEU-202S-HMK1
Basic Business	
WDR	Support DWDR
Protocol	Private protocol
Button	2 x button (Call button、Tamper button)
Network protocol	TCP/IP, IPv4, HTTP, RTP, RTSP, NTP
Specification Index	
Card Capacity	10000
Maximum Connected Indoor Station	20
Hardware Specification	
FOV	Horizontal: 106.9° Vertical: 56.9° Diagonal: 127.9°
Power Consumption	< 10W
Volume Adjustment	Support
Audio Quality	Noise suppression, echo cancellation, AGC
Audio Input	1 x Built-in omnidirectional microphone
Audio Output	1 x Built-in speaker
Audio Compression Bitrate	128Kbps
Protection Level	IP65 (Apply waterproof glue to the gap between the device and the wall. See the corresponding quick guide for details) IK08
Power Supply	DC12V ±25%, IEEE802.3af PoE power supply
Operating System	Linux
Illuminator	IR light (adaptive)
Weight	375g
Mount Method	wall-mounted、recessed installation.
Network	100Mbps network port, supports IEEE802.3af PoE power supply
Interface	Power*1, network port*1, RS485*1, Wiegand*1, IO input*4, door lock*2 (support electric lock/door magnet), tamper button*1
Dimensions (L x W x H)	95.5mm*175.5mm* 33mm
Operating Environment	-40°C to 60°C, 10% to 90%, noncondensing, outdoor
Power Output	12V/0.25A
Compliance	
NDAA Compliant	Support

Dimensions

- **OEU-202S-HMK1**

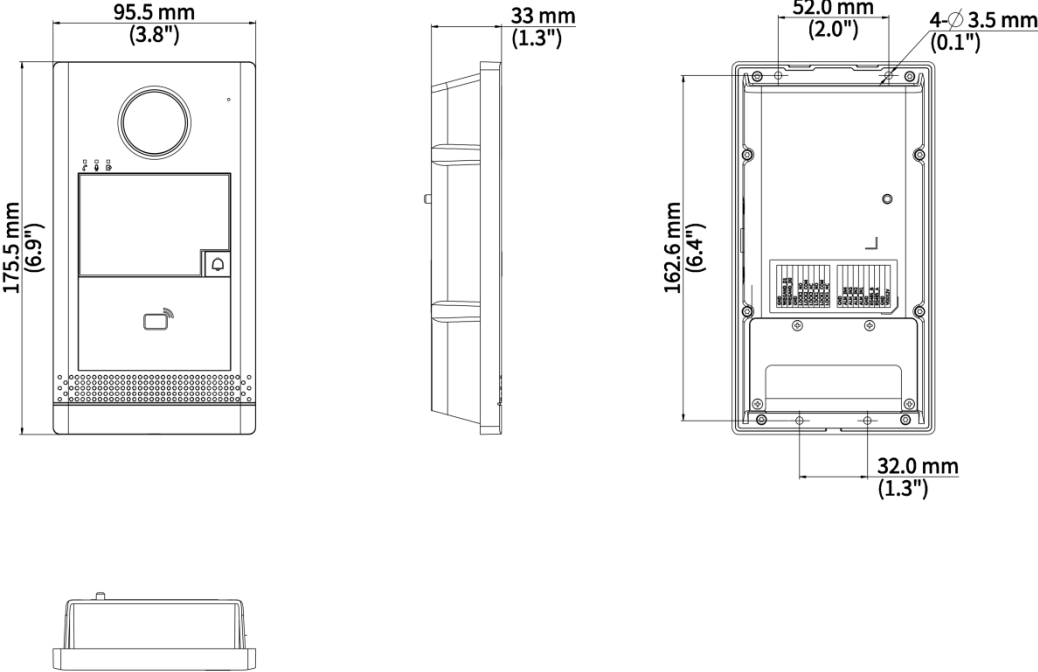

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

-  <http://www.uniview.com>
-  overseasbusiness@uniview.com; globalsupport@uniview.com
-  No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.