

Unmanaged Ethernet PoE Switches NSW2020-8T2GT-LPOE-IN



주요 특징


- Multiple working modes to address your business needs: Default (Normal mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable

사양

Model	NSW2020-8T2GT-LPOE-IN
Hardware Specification	
Ports Type	8×10/100Mbps PoE ports (RJ45), 2×10/100/1000Mbps ports
Switching capacity	5.6 Gbps
Packet Buffer	2 M bit
Forwarding performance	4.17Mpps
Power Supply	AC: 100 to 240V, 50/60Hz
MAC	4K
PoE Standard	IEEE 802.3 at, IEEE 802.3af
PoE Mode	ModeA (1236), ModeB (4578)

Max.PoE Power	Max capacity:65W Max capacity for single port: 30W
Prior Ports	1 to 2
Standards	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Cooling Fans	0
Max.Power	75W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 90% (noncondensing)
Indicator	Power: Off: Abnormal power input. Green: Normal power input. Yellow: The total PoE power is higher than 85% of the total power of the device. LINK/ACT: Off: No link Steady on: Linked Flashing: Transmitting data
Dimensions (W×D×H)	169*132*40mm
Weight	0.67KG
작업 모드	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 meters
Compliance	
NDAA Compliant	Support

크기

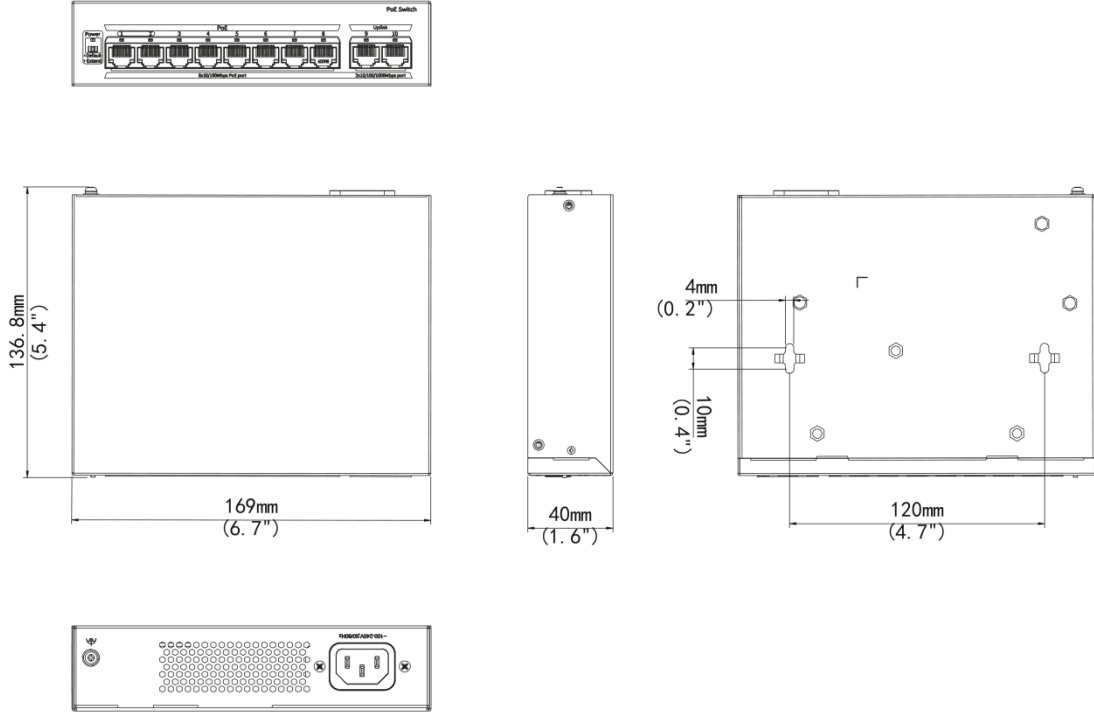

Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。