

## Villa Outdoor Station OEU-201S-HMK-W



## Overview

OEU-201S-HMK-W is one of the terminal equipment of the digital building intercom system, with video intercom, security alarm, video surveillance, to provide a safe and comfortable living environment for residents. It can be used in villa residential building system.


## Features

- Front panel: Aluminum alloy
- Supports batch configuration
- Supports call and intercom with the connected indoor stations and APP.
- Supports monitoring functions, security alarm, tamper alarm
- Supports Wi-Fi
- Built-in IC card reader

## Specifications

| Model                          | OEU-201S-HMK-W                                                                                                              |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Hardware Specification         |                                                                                                                             |
| Operation System               | Linux                                                                                                                       |
| Supplement Light               | IR light(Adaptive infrared compensation)                                                                                    |
| FOV                            | Horizontal:124.3°<br>Vertical:67.5°<br>Diagonal:147.2°                                                                      |
| Power Consumption              | <10W                                                                                                                        |
| Volume Adjustment              | Adjustable                                                                                                                  |
| Audio Quality                  | Noise suppression, echo cancellation and AGC                                                                                |
| Audio Input                    | 1 built-in omnidirectional microphone                                                                                       |
| Audio Output                   | 1 built-in speaker                                                                                                          |
| Audio Compression Standard     | PCM, G711, MP3                                                                                                              |
| Audio Compression Bitrate      | 128Kbps                                                                                                                     |
| Protection Level               | IP65 (Apply waterproof glue to the gap between the device and the wall. For more information, see the quick guide.)<br>IK08 |
| Power Supply                   | DC 12V±25% input;IEEE802.3af, Standard PoE                                                                                  |
| Weight                         | 0.267Kg                                                                                                                     |
| Mount Method                   | Wall mounted, flush installation                                                                                            |
| Network                        | 100Mbps network port, supports IEEE802.3af PoE power supply, WIFI                                                           |
| Interface                      | Power *1, network port *1, RS485, door lock interface *2, IO input *4                                                       |
| Resolution                     | 2MP                                                                                                                         |
| Dimensions (L x W x H)         | 79mm×171mm×34mm                                                                                                             |
| Operating Environment          | -30°C~+60°C,10%~90%, non-condensing, outdoor                                                                                |
| Operating Frequency            | 13.56MHz                                                                                                                    |
| Basic Business                 |                                                                                                                             |
| WDR                            | Support DWDR                                                                                                                |
| Protocol                       | UNV private protocol                                                                                                        |
| Button                         | 1 physical button                                                                                                           |
| Network protocol               | TCP/IP, IPv4, HTTP, RTP, RTSP, NTP                                                                                          |
| Specification Index            |                                                                                                                             |
| Card Capacity                  | 10000                                                                                                                       |
| Linked Indoor Station Capacity | 20                                                                                                                          |
| Compliance                     |                                                                                                                             |
| NDAA Compliant                 | Support                                                                                                                     |

# Dimensions

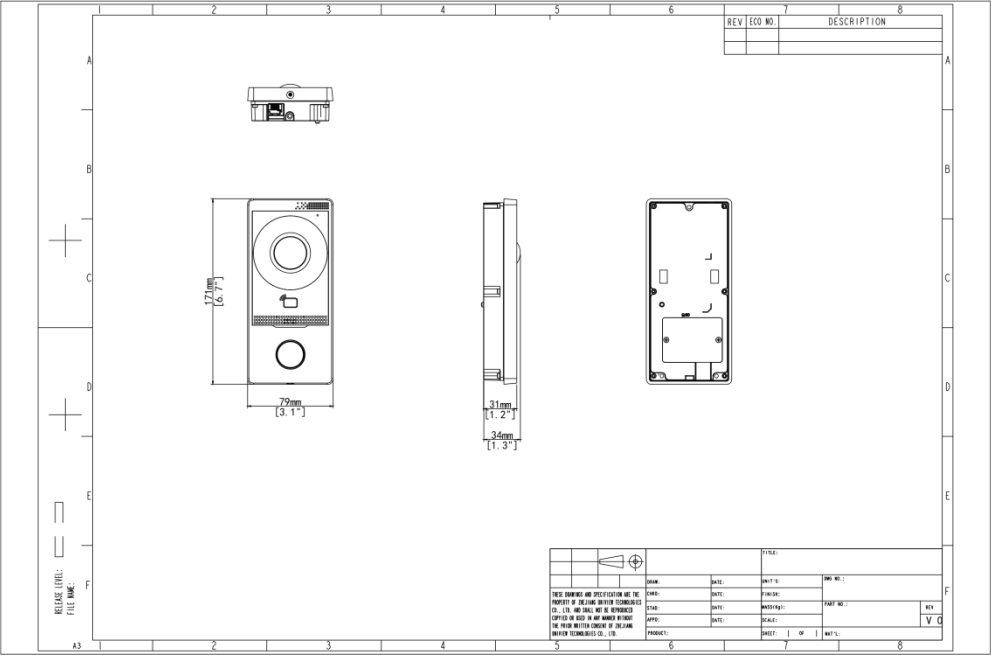

## Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.  
\*Product specifications and availability are subject to change without notice.  
\*Despite our best efforts, technical or typographical errors may exist in this document.  
Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.