

## Network Video Recorder NVR304-B-IQ Series



## Features

- Support Ultra H.265/H.265/H.264 video formats
- Support 16/32 channel input
- Support 1 ch HDMI, 1 ch VGA. HDMI up to 4K (3840x2160) resolution
- Support HDMI and VGA simultaneous output
- Support up to 12 Megapixels resolution recording
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


## Specifications

| Model                           | NVR304-16B-IQ                                                                                                                             | NVR304-32B-IQ                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decoding                        |                                                                                                                                           |                                                                                                                                                             |
| Decoding Format                 | Ultra 265,H.265,H.264                                                                                                                     |                                                                                                                                                             |
| Decoding Capability             | Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 16 x 720P@30<br>Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30 | Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30, 10 x 1080P@30, 20 x 720P@30, 32 x D1<br>Smart On: 2 x 4K@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30, 32 x D1 |
| Decoding Capability Description | The resolution of each channel cannot exceed 8192 pixels in length and 4096 pixels in width                                               |                                                                                                                                                             |
| Audio Compression               | G.711A, G.711U                                                                                                                            |                                                                                                                                                             |
| Network                         |                                                                                                                                           |                                                                                                                                                             |
| Incoming Bandwidth              | 160 Mbps                                                                                                                                  |                                                                                                                                                             |
| Outgoing Bandwidth              | 128Mbps                                                                                                                                   |                                                                                                                                                             |
| Max Remote Users                | 128                                                                                                                                       |                                                                                                                                                             |
| Protocols                       | TCP/IP, P2P, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, RTSP, IPv6, IPv4, 802.1x, UPnP                                         |                                                                                                                                                             |
| Browser (Plugin)                | Chrome 45+, Edge 79+, Firefox 52+                                                                                                         |                                                                                                                                                             |
| Video/Audio Input               |                                                                                                                                           |                                                                                                                                                             |
| IP Video Input                  | 16-ch                                                                                                                                     | 32-ch                                                                                                                                                       |
| RCA Audio Input                 | 1-ch                                                                                                                                      |                                                                                                                                                             |
| Peripheral Input                |                                                                                                                                           |                                                                                                                                                             |
| Ip Speaker                      | 32-ch                                                                                                                                     |                                                                                                                                                             |
| POS                             | All channels                                                                                                                              |                                                                                                                                                             |
| Video/Audio Output              |                                                                                                                                           |                                                                                                                                                             |
| HDMI Output                     | 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz    |                                                                                                                                                             |
| VGA Output                      | 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz                            |                                                                                                                                                             |
| RCA Audio Output                | 1-ch                                                                                                                                      |                                                                                                                                                             |
| Liveview Display                | 1/4/6/8/9/16                                                                                                                              | 1/4/6/8/9/16/25/32                                                                                                                                          |
| Corridor Mode Screen            | 3/4/5/7/9/10/12/16                                                                                                                        | 3/4/5/7/9/10/12/16/32                                                                                                                                       |
| Two-way Audio                   |                                                                                                                                           |                                                                                                                                                             |
| Two-way Audio                   | 1-ch,RCA(Using the audio input and output)                                                                                                |                                                                                                                                                             |
| Snapshot                        |                                                                                                                                           |                                                                                                                                                             |
| FTP/Schedule/Event Snapshot     | 4-ch snapshot (max. D1 (720 × 576) video resolution, with D1 snapshot resolution)                                                         |                                                                                                                                                             |
| Recording                       |                                                                                                                                           |                                                                                                                                                             |
| Recording Resolution            | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF                                                                                |                                                                                                                                                             |
| Synchronous Playback in Local   | 16-ch                                                                                                                                     |                                                                                                                                                             |

| Smart Function                 |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smart by IPC                   | All channels (up to 8 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring, People Counting                                                                                                                                                                                                                                   |
| Smart by NVR                   | Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Ultra Motion Detection (UMD), Plate Comparison                                                                                                                                                                                                                                                                                                         |
| Smart by NVR Analyzer Mode     | Single Mode (Face Recognition), Single Mode (SIP), Single Mode (UMD), Single Mode (AcuSearch/AcuTrack), Modes cannot active simultaneously, only one mode can active at a time.                                                                                                                                                                                                                                           |
| VCA Search                     | AcuSearch, AcuTrack, Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map, SmartSearch+, Behavior Search                                                                                                                                                                                                     |
| AcuSearch                      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Acu Search Performance         | All channels with UNV SIP/UMD Camera                                                                                                                                                                                                                                                                                                                                                                                      |
| AcuTrack                       |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Acu Track Performance          | All channels with UNV SIP/UMD Camera                                                                                                                                                                                                                                                                                                                                                                                      |
| face detection                 |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| face detection by NVR          | Up to 8-ch with UNV Face Detection Camera, Up to 1-ch with normal camera (UNV and Third-part brand, 1-ch 2MP)                                                                                                                                                                                                                                                                                                             |
| Plate Comparison               |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Vehicle Number Library         | Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total                                                                                                                                                                                                                                                                                                                                            |
| SIP                            |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SIP by NVR with normal cameras | Up to 2-ch with normal camera (UNV and Third-part brand, 2-ch 2MP, 1-ch 4MP)                                                                                                                                                                                                                                                                                                                                              |
| UMD                            |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| UMD by NVR with normal cameras | Up to 4-ch with normal camera (UNV and Third-part brand, 4-ch 2MP, 2-ch 4MP, 1-ch 4K)                                                                                                                                                                                                                                                                                                                                     |
| Alarm                          |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| General Alarm                  | Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection                                                                                                                                                                                                                                 |
| Alert Alarm                    | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal                                                                                                                                                                                                                                                                          |
| GUI Language                   |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| GUI Language                   | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian |
| Hard Disk                      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SATA                           | 4 SATA Interfaces                                                                                                                                                                                                                                                                                                                                                                                                         |
| Capacity                       | Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)                                                                                                                                                                                                                                                   |
| External Interface             |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Network Interface              | 2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface                                                                                                                                                                                                                                                                                                                                                                 |
| USB                            | Front panel: 1 × USB2.0, Rear panel: 1 × USB2.0, 1 × USB3.0                                                                                                                                                                                                                                                                                                                                                               |

|                                 |                                                    |
|---------------------------------|----------------------------------------------------|
| RS485                           | N/A                                                |
| RS232                           | N/A                                                |
| Alarm In                        | N/A                                                |
| Alarm Out                       | N/A                                                |
| Power Supply                    | DC 12 V/5 A                                        |
| Working Environment             |                                                    |
| Working Temperature             | -10 °C ~ +55 °C (+14 °F ~ +131 °F)                 |
| Working Humidity                | ≤ 90% RH (non-condensing)                          |
| Power Consumption (without HDD) | ≤ 12W                                              |
| Dimensions                      |                                                    |
| Weight (without HDD)            | ≤ 3.4Kg (7.5lb)                                    |
| Dimensions                      | 440mm × 350mm × 48mm (17.3"×13.8"×1.9")            |
| Certification                   |                                                    |
| Certification                   | CE; FCC; UL; RoHS; WEEE                            |
| CE                              | EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035 |
| FCC                             | Part15 Subpart B                                   |

## Dimensions

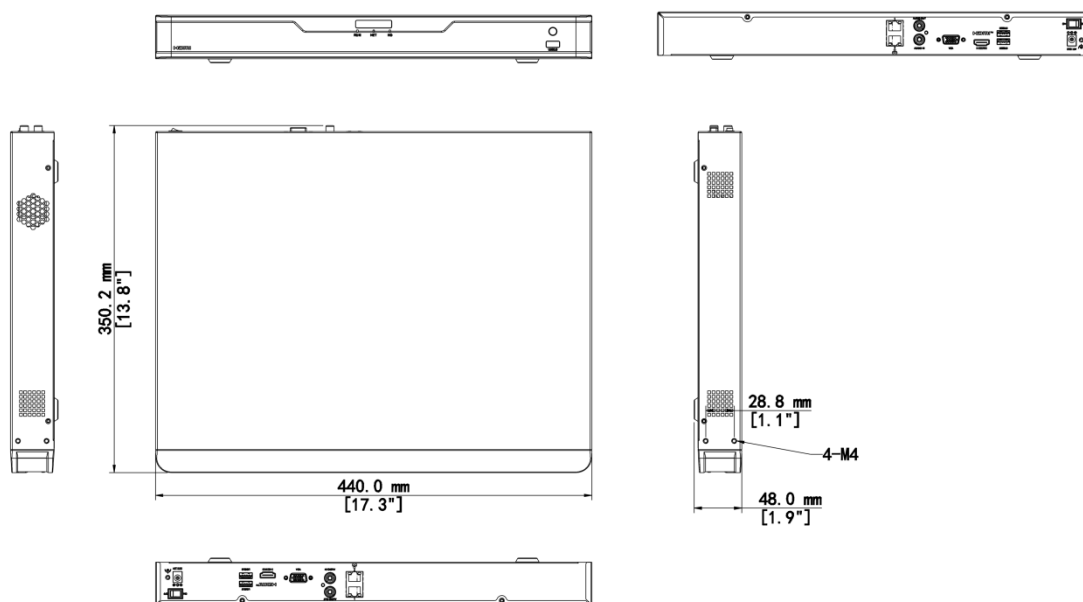

Accessories

| RM-1U-440<br>4HDD 1U NVR Rack Mount                                               |  |  |
|-----------------------------------------------------------------------------------|--|--|
|  |  |  |

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.