
4MP Owlview lite Wise-ISP 고정형 웜 라이트 터렛 네트워크 카메라

IPC3614LE-ADF28(40)K-WP-L2



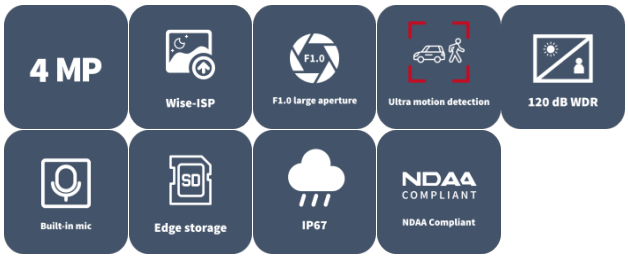

주요 특징

- 4MP, 1/1.8" CMOS 센서와 F1.0 대구경 렌즈로 고화질 이미지 제공
- 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG (서브 스트림 전용)
- Wise-ISP 기술 지원, 극저조도 환경에서 색상, 디테일 및 스미어 효과를 깊이 최적화
- Ultra 모션 감지(사람/차량 감지) 지원
- 120dB 트루 WDR 기술로 강한 조명 환경에서도 선명한 이미지 구현
- 9:16 복도 모드 지원
- 내장 마이크
- 웜 라이트, 최대 30m(98.4ft) 웜 라이트 거리

- MicroSD, 최대 512GB 지원
- IP67 보호 등급
- PoE 전원 공급 지원

사양

Model	IPC3614LE-ADF28K-WP-L2	IPC3614LE-ADF40K-WP-L2
카메라		
최대 해상도	4 MP	
센서	1/1.8" CMOS	
최저 조도	Color: 0.0003 Lux (F1.0, AGC ON)	
셔터	Auto/Manual, 1 to 1/100000 s	
조정 각도	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°	
S/N	> 52 dB	
WDR	120 dB	
렌즈		
초점 거리	2.8 mm	4.0 mm
아이리스	F1.0	
화각(수평)	103.7 °	90.8 °
화각(수직)	57.2 °	48.5 °
화각(사각)	117.9 °	104.3 °
렌즈 유형	Fixed	
Iris Type	Fixed	
DORI		
DORI 거리(렌즈)	2.8 mm	4.0 mm


DORI 거리(감지)	43.4 m (142.5 ft.)	62.1 m (203.6 ft.)
DORI 거리(관찰)	17.4 m (57.0 ft.)	24.8 m (81.4 ft.)
DORI 거리(인식)	8.7 m (28.5 ft.)	12.4 m (40.7 ft.)
DORI 거리(식별)	4.3 m (14.3 ft.)	6.2 m (20.4 ft.)
조명		
조명 거리(웜라이트)	30 m (98.4 ft.)	
조명 켜기/끄기 제어	Auto/Manual	
비디오		
비디오 압축	Ultra 265, H.265, H.264, MJPEG (Sub Stream Only)	
H.264 코드 프로파일	Baseline profile, Main profile, High profile	
프레임 속도	Main Stream: 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps	
비디오 비트 전송률	128 Kbps to 6144 Kbps	
U-code	Support	
OSD	Up to 4 OSDs	
프라이버시 마스크	Up to 4 areas	
ROI	Up to 8 areas	
비디오 스트림	Dual streams	
이미지		
스마트 조명	Support	
화이트 밸런스	Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2, Area white balance	
디지털 노이즈 제거	2D/3D DNR	
이미지 회전	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise	

디워핑	N/A
HLC	Support
BLC	Support
디포그	Digital defog
이벤트	
기본 감지	Motion detection, Ultra motion detection (based on human body and vehicle detection), Tampering alarm, Audio detection
기본 기능	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
오디오	
오디오 압축	G.711U, G.711A, AAC-LC
오디오 비트레이트	G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps
양방향 오디오	N/A
억제	Support
샘플링 주파수	G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz
저장 장치	
엣지 스토리지	MicroSD, up to 512 GB
네트워크 스토리지	ANR, NAS (NFS)
네트워크	
프로토콜	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS
호환성 통합	ONVIF (Profile S, Profile G, Profile T), API, SDK
사용자/호스트	Up to 32 users. 3 user levels: administrator, common user and operator
보안	Password protection, Strong Password, HTTPS encryption, Export operation logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
고객	EZStation, APP

웹 브라우저	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+	
인터페이스		
오디오 I/O	N/A	
알람 I/O	N/A	
시리얼 포트	N/A	
내장 마이크	Support	
내장 스피커	N/A	
WIFI	N/A	
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet	
비디오 출력	N/A	
인증		
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4) FCC (FCC 47 CFR part15 B)	
안전성	CE-LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)	
환경	CE-RoHS (2011/65/EU ; (EU) 2015/863) ; WEEE (2012/19/EU)	
보호	IP67 (IEC 60529)	
일반		
전원	DC 12 V±25%, PoE (IEEE 802.3af)	
전력 소비량	Max. 3.1 W	
전원 인터페이스	Ø5.5 mm coaxial power plug	
크기	Ø117.8 mm × 98.9 mm (Ø4.6" × 3.9") (Ø × H)	
무게	0.28 kg（0.62 lb.）	0.30 kg（0.66 lb.）
재료	Metal + Plastic	

작업 환경	-30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
저장 환경	-30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
서지 보호	4 KV
초기화 버튼	Support
웹 클라이언트 언어	14 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian, Turkish

크기

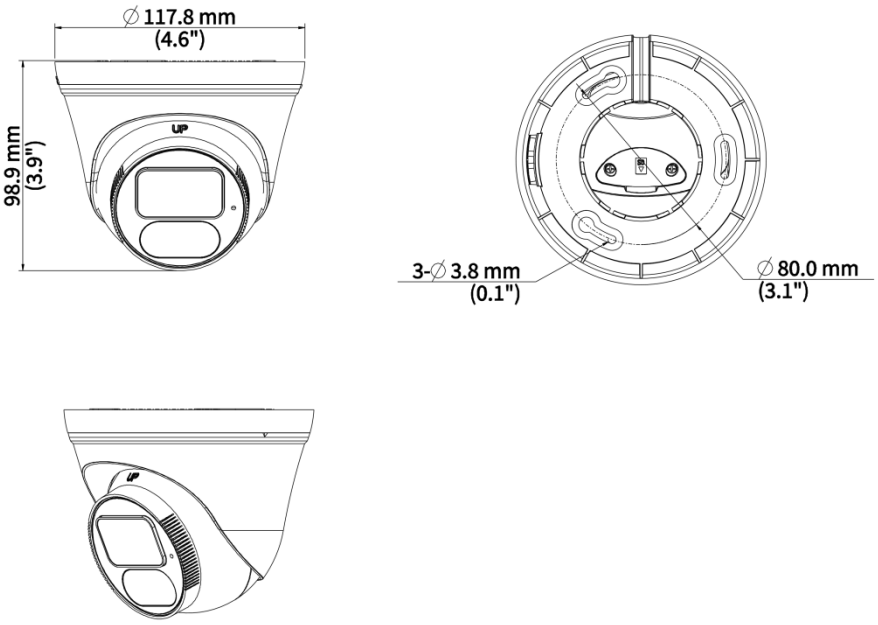

액세서리

TR-JB03-I-IN Junction Box For Turret Camera(Support Wiring From Behind)	**TR-SM05-IN** Switch Box Adapter for Fixed Dome	**TR-WM07P-B** Wall Mounting Plastic Bracket
		
TR-JB07/WM03-G-IN-V2 Wall Mounting Assembling Bracket For Dome&Mini Dome&Plastic Turret Camera	**TR-WM03-D-IN-V2** Wall Mounting Bracket For Dome&Mini Dome&Plastic Turret Camera	**TR-A01-IN** NPT 3/4'' Waterproof Cable Gland
		
TR-UP06-C-IN-V2 Pole Mounting Bracket For Bullet Junction Box Only	**TR-UC08-C-V2** Bullet&Dome Corner Mounting Bracket	**TR-SE24-IN** Dome Pendent Mounting Pole 200mm
		
TR-SE24-A-IN Dome Pendent Mounting Pole 500mm	**TR-CM24-IN** Dome Pendent Mounting Bracket(Indoor)	
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.