

## 4MP 33X LightHunter Network PTZ Dome Camera IPC6634S-X33-VF



## Features

- High quality image with 4 MP, 1/2.8" CMOS sensor
- 2688 × 1520@30 fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 33X optical zoom
- Smart intrusion prevention, supports false alarm filtering, including cross line, intrusion, enter area, leave area detection
- automatic selection of best snapshots, supports face detection masked area
- People counting, supports people flow counting and crowd density monitoring, suitable for different statistical scenarios
- LightHunter technology ensures ultra-high image quality in low illumination environment
- AC 24 V±25%, DC 24 V±25%, PoE+ (IEEE802.3 at)
- Alarm I/O: 7/2, audio I/O: 1/1
- IP67 ingress protection
- IK10 vandal resistant


## Specifications

| Model                     | IPC6634S-X33-VF   |
|---------------------------|---|
| <b>Camera</b>             |   |
| Sensor                    | 1/2.8" CMOS   |
| Min. Illumination         | Color: 0.003 Lux (F1.5, AGC ON), BW: 0.001 Lux (F1.5, AGC ON)   |
| Day/Night                 | IR-cut filter with auto switch (ICR)  |
| Shutter                   | Auto/Manual, 1 to 1/100000 s  |
| WDR                       | 120 dB  |
| S/N                       | >56 dB  |
| <b>Lens</b>               |   |
| Focal Length              | 4.5 to 148.5 mm   |
| Digital Zoom              | 16X   |
| Optical Zoom              | 33X   |
| Iris                      | F1.5 to F4.0  |
| Field of View (H)         | 51.4° to 2.5°   |
| Field of View (V)         | 30.3° to 1.4°   |
| Field of View (D)         | 63.2° to 3.0°   |
| <b>DORI</b>               |   |
| DORI Distance (Lens)      | 4.5 to 148.5 mm   |
| DORI Distance (Detect)    | 105.8 m to 3172.5 m (346.9 ft. to 10408.5 ft.)  |
| DORI Distance (Observe)   | 42.3 m to 1269.0 m (138.8 ft. to 4163.4 ft.)  |
| DORI Distance (Recognize) | 21.2 m to 634.5 m (69.4 ft. to 2081.7 ft.)  |
| DORI Distance (Identify)  | 10.6 m to 317.3 m (34.8 ft. to 1041.0 ft.)  |
| <b>Video</b>              |   |
| Privacy Mask              | 24 areas, up to 4 areas per scene   |
| Video Compression         | Ultra 265, H.265, H.264, MJPEG  |
| Frame Rate                | Main Stream: 4 MP (2688 × 1520), max. 30 fps<br>Sub Stream: 1080P (1920 × 1080), max. 30 fps<br>Third Stream: D1 (720 × 576), max. 30 fps |
| Video Bit Rate            | 128 Kbps to 16 Mbps   |
| U-code                    | Support   |
| ROI                       | Support   |
| Video Stream              | Triple streams  |
| OSD                       | Up to 10 OSDs   |
| <b>PTZ</b>                |   |
| Pan Range                 | 360° (endless)  |
| Pan Speed                 | 2°/s to 200°/s  |
| Tilt Range                | 1° to 90°   |
| Tilt Speed                | 2°/s to 200°/s  |
| Number of Presets         | 1024  |
| Preset Patrol             | 16 patrols, up to 64 presets for each patrol  |
| Route Patrol              | 16 patrols, up to 32 actions for each patrol  |

|                            |   |
|----------------------------|---|
| Recorded Patrol            | 16 patrols, up to 128 actions for each patrol   |
| Patrol Stay Time           | 15 s to 1800 s  |
| Preset Image Freeze        | Support   |
| Home Position              | Support   |
| <b>Intelligent</b>         |   |
| Exception Detection        | Object removed, Object Left Behind  |
| Auto Tracking              | Support, target filtering: human, non-motor vehicle and vehicle   |
| People Counting            | Support people flow counting and crowd density monitoring   |
| Smart Intrusion Prevention | Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)                                |
| <b>Image</b>               |   |
| Defog                      | Digital defog   |
| White Balance              | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2  |
| Digital Noise Reduction    | 2D/3D DNR   |
| Flip                       | Normal, Flip vertical, Flip horizontal, 180°  |
| HLC                        | Support   |
| BLC                        | Support   |
| Heatwave Reduction         | Support   |
| <b>Events</b>              |   |
| Basic Detection            | Motion detection, Tampering alarm, Audio detection, Object removed, Object Left Behind  |
| General Function           | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, Alarm input, Alarm output   |
| <b>Audio</b>               |   |
| Audio Compression          | G.711U, G.711A  |
| Audio Bitrate              | 128 Kbps  |
| Two-way Audio              | Support   |
| Suppression                | Support   |
| Sampling Rate              | 16KHZ   |
| <b>Storage</b>             |   |
| Edge Storage               | MicroSD, up to 512 GB   |
| Network Storage            | ANR, NAS (NFS)  |
| <b>Network</b>             |   |
| Protocols                  | SSH, IGMP, RTP, RTCP, SMTP, IPv4, IPv6, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTSP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, 802.1x, SNMP, QoS, SSL/TLS  |
| Compatible Integration     | ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK  |
| User/Host                  | Up to 32 users. 3 user levels: administrator, common user and operator  |
| Security                   | TLS 1.3, Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF |
| Client                     | EZStation, UNV-Link, UNV-Link Pro   |
| Web Browser                | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+   |
| <b>Interface</b>           |   |
| Audio I/O                  | 1 Input: impedance 1 kΩ, amplitude 2.5 V [p-p], 1 Output: impedance 600 Ω, amplitude 2.5 V [p-p]  |

|                     |   |
|---------------------|---|
| Alarm I/O           | 7/2   |
| Serial Port         | 1 * RS485   |
| Built-in Mic        | N/A   |
| Built-in Speaker    | N/A   |
| WIFI                | N/A   |
| Network             | 1 × RJ45 10 M/100 M Base-TX Ethernet  |
| Video Output        | 1 BNC (for debugging)   |
| Certification       |   |
| EMC                 | CE-EMC (EN55032:2015; EN55024:2010+A1:2015; EN61000-3-2:2014; EN61000-3-3:2013)<br>FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)   |
| Safety              | CE LVD (EN 62368-1:2014+A11:2017)<br>UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)   |
| Environment         | CE-ROHS (2011/65/EU;(EU)2015/863)   |
| Protection          | IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013)<br>IK10 (IEC 62262:2002)  |
| General             |   |
| Power               | AC 24 V±25%, DC 24 V±25%, PoE+ (IEEE 802.3 at)  |
| Power Consumption   | Max. 16 W   |
| Power Interface     | Wires with cold-pressed terminal  |
| Dimensions          | Ø218 mm × 297 mm (Ø8.6" × 11.7") (Ø × H)  |
| Weight              | 4.07 kg (8.97 lb.)  |
| Working Environment | -40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing)   |
| Storage Environment | -40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing)   |
| Surge Protection    | 6 KV  |
| Reset Button        | Support   |
| Web Client Language | 22 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese, Arabic, Slovak |
| Configurable        |   |
| P/N                 | Support   |

# Dimensions

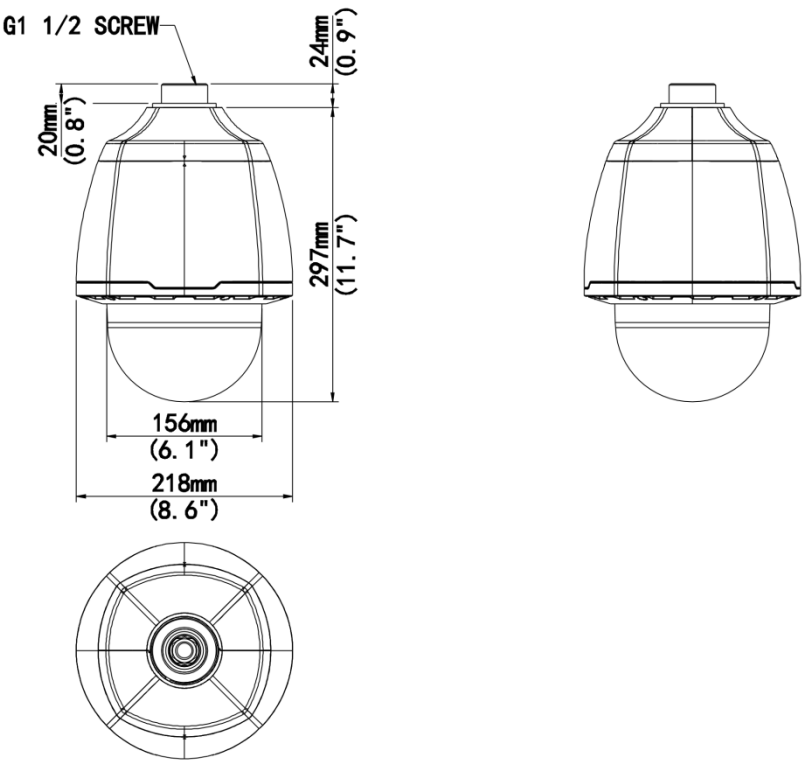

# Accessories

**TR-UF45-A-IN**

Dome Indoor Ceiling Mounting Pedestal



**TR-SE45-A-IN**

Dome Ceiling Mounting Pole 500



**TR-SE45-IN**

Dome Ceiling Mounting Pole 200



**TR-CE45-IN**

Dome Indoor Ceiling Mounting Bracket



**TR-WE45-IN**

Dome Wall Mounting Bracket



**TR-WE45-A-IN**

Long Wall Mounting Bracket for Dome



TR-JB12-IN  
Dome Junction Box



TR-WE45-B-IN  
Dome Gooseneck Bracket



TR-UP08-A-IN  
Dome Pole Mounting Bracket



TR-UP08-B-IN  
Aluminium Alloy Pole Mounting Bracket



TR-UC08-A-IN  
Dome Corner Mounting Bracket



TR-UC08-B-IN  
Aluminium Alloy Corner Mounting Bracket



TR-FM222  
In-ceiling Bracket for Standard Dome



#### Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.