

8MP+4MP Bi-Channel LightHunter Intelligent Bullet Network Camera

IPC28184EA-ADX5K-F40-I1



Features

- One IP with two channels, combines the details and full view, making target area stand out without losing overall view
- 3840 × 2160@30 fps in the main stream of detailed channel with ISP algorithm, provides high definition image
- Ultra 265, H.265, H.264, MJPEG
- Built-in dual-mic, has better sound performance
- Two types of illumination light, offer three illumination modes and support sound-light warning
- Detailed channel supports electric control and tilt angle adjustment, easier for installation and debugging
- Switching among three intelligent functions, suitable for various application scenes
- Mix-traffic detection, supports human body, motor vehicle and non-motor vehicle image capture and attribute collection, realizes data visualization management, allows users to get target information for further data analysis
- supports front-end comparison, supports blacklist and allowlist comparison, increases the concurrent detection number up to 120 faces
- Smart intrusion prevention, supports false alarm filtering, realizes accurate detection based on specific target
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Alarm I/O: 3/2, audio I/O: 2/1


Specifications

Channel	Channel 1	Channel 2
Camera		
Max Resolution	4 MP	8 MP
Sensor	1/1.8" CMOS	
Min. Illumination	Color: 0.0005 Lux (F1.0, AGC ON)	Color: 0.005 Lux (F1.6, AGC ON), 0 Lux with IR
Day/Night	N/A	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 to 1/100000 s	
WDR	120 dB	
Adjustment Angle	Tilt: -10° to 10° (electric control , for installation and debugging)	
S/N	>56 dB	
Lens		
Focal Length	4.0 mm	10 to 50 mm
Optical Zoom	N/A	5X
Iris	F1.0	F1.6
Field of View (H)	94.7°	33.8° to 8.4°
Field of View (V)	50.3°	18.8° to 4.6°
Field of View (D)	116.5°	39.9° to 10.0°
Iris Type	Fixed	DC-iris
DORI		
DORI Distance (Detect)	79.1 m (259.6 ft.)	292.5 m to 1237.5 m (959.6 ft. to 4060.0 ft.)
DORI Distance (Observe)	31.7 m (103.9 ft.)	117.0 m to 495.0 m (383.9 ft. to 1624.0 ft.)
DORI Distance (Recognize)	15.8 m (51.8 ft.)	58.5 m to 247.5 m (191.9 ft. to 812.0 ft.)
DORI Distance (Identify)	7.9 m (25.9 ft.)	29.3 m to 123.8 m (96.1 ft. to 406.2 ft.)
Illuminator		
Illumination Distance (Warm Light)	Up to 30m (98.43ft)	
Light On/Off Control	Auto/Manual	
Illumination Distance (IR)	N/A	Up to 50m (164.0ft)
Wavelength	N/A	750 nm
Video		
Video Compression	Ultra 265, H.265, H.264, MJPEG	
Video Bit Rate	128 Kbps to 16 Mbps	
U-code	Support	
ROI	Support	
Video Stream	Triple streams	
OSD	Up to 10 OSDs	
Frame Rate-Main Stream	4 MP (2688 × 1520), max. 30 fps	8 MP (3840 × 2160), max. 30 fps
Frame Rate-Sub Stream	1080P (1920 × 1080), max. 30 fps	
Frame Rate-Third Stream	D1 (720 × 576), max. 30 fps	
Intelligent		
Recognition	N/A	Face Recognition: Max support 16 face

		libraries, Max supports 100000 faces in face library
Metadata Analyse	N/A	Support human body, human face, motor vehicle and non-motor vehicle image capture and attribute collection
Smart Intrusion Prevention	Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)	
People Counting	N/A	Support people flow counting and crowd density detection
Image		
White Balance	Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2	
Digital Noise Reduction	2D/3D DNR	
Flip	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise	
HLC	Support	
BLC	Support	
Smart IR	Support	
Defog	Digital defog	
Events		
Basic Detection	Motion detection, Tampering alarm, Audio detection	Motion detection, Tampering alarm, Audio detection, Object removed, Object Left Behind
General Function	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication, Alarm input, Alarm output	
Audio		
Audio Compression	G.711U, G.711A	
Audio Bitrate	128 Kbps	
Two-way Audio	Support	
Suppression	Support	
Sampling Rate	16KHZ	
Storage		
Edge Storage	MicroSD, up to 512 GB	
Network Storage	ANR, NAS (NFS)	
Network		
Protocols	SSH, IGMP, RTP, RTCP, SMTP, IPv4, IPv6, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTSP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, 802.1x, SNMP, QoS, SSL/TLS	
Compatible Integration	ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK	
User/Host	Up to 32 users. 3 user levels: administrator, common user and operator	
Security	TLS 1.3, Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF	
Client	EZStation, UNV-Link, UNV-Link Pro	
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+	
Interface		
Audio I/O	2 Input: impedance 1 k Ω , amplitude 2.5 V [p-p], 1 Output: impedance 600 Ω , amplitude 2.5 V [p-p]	

Alarm I/O	3/2
Serial Port	1 × RS485
Built-in Mic	Built-in dual-mic
Built-in Speaker	Support
Network	1 × RJ45 10 M/100 M/1000 M Base-TX Ethernet
Certification	
EMC	CE-EMC (EN 55032: 2015+A1:2020,EN 61000-3-3: 2013+A1: 2019,EN IEC 61000-3-2: 2019+A1: 2021,EN 55035: 2017+A11:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)
Safety	CE LVD (EN 62368-1:2014+A11:2017) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	IP66 (IEC 60529:1989+AMD1:1999+AMD2:2013)
General	
Power	AC 24 V±25%
Power Consumption	Max. 31 W
Power Interface	Wires with cold-pressed terminal
Dimensions	326 mm × 147 mm × 121 mm (12.8" × 5.8" × 4.8") (L × W × H)
Weight	2.11 kg (4.65 lb.)
Working Environment	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Storage Environment	-40 °C to 70 °C (-40 °F to 158 °F), Humidity: ≤ 95% RH (non-condensing)
Surge Protection	6 KV
Reset Button	Support
Web Client Language	22 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese, Arabic, Slovak
Configurable	
P/N	

Dimensions

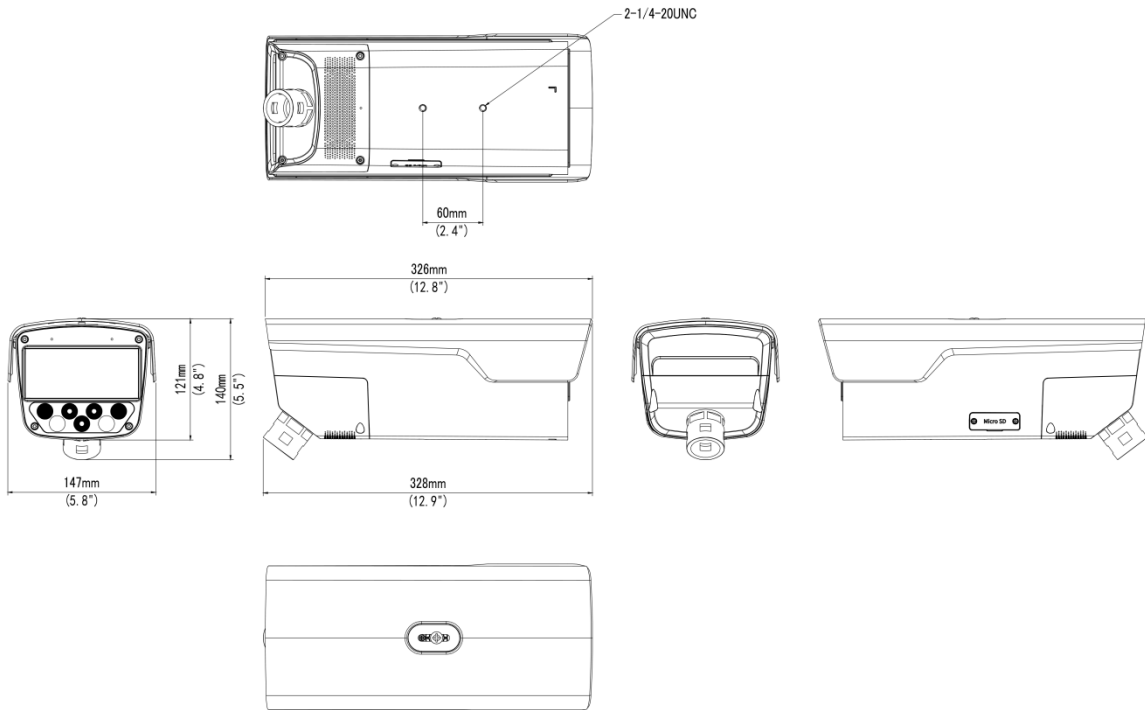

Accessories

<p>TR-CM06-IN Box Housing Ceiling Mounting Bracket</p>	<p>TR-UV06-A-IN 3D Adjustable Mounting Bracket</p>	<p>TR-UP06-IN Universal Pole Mounting Bracket</p>
		
<p>TR-WM06-I-IN Wall Mounting Bracket for 28&29Housing</p>	<p>TR-CM06-C-IN Panoramic Camera Ceiling Mounting Bracket</p>	
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.