5MP Fixed IR Dome Network Camera

IPC325LB-AF28(40)-A2





주요 특징

- 고화질 이미지 (5 MP, 1/3.0" CMOS 센서 사용)
- 5 MP (2592 × 1944)@20 fps; 4 MP (2560 × 1440)@20 fps; 3 MP (2304 × 1296)@20 fps; 1080P (1920 × 1080)@30/25 fps
- 정확한 인체 감지 2.0 지원
- Ultra 265, H.265, H.264
- 내장 마이크
- 스마트 IR, 최대 30 m (98.4 ft.) IR 거리
- 주/야간 기능
- 2D/3D DNR (디지털 노이즈 감소)
- DC 12 V, PoE (IEEE 802.3af) 전원 공급 장치
- IP67 보호

- IK10 파손 방지
- 2-axis

사양

Model	IPC325LB-AF28-A2	IPC325LB-AF40-A2
카메라		
최대 해상도	5 MP	
센서	1/3.0" CMOS	
최저 조도	컬러: 0.01 Lux (F2.0, AGC 켜짐), IR 사용 시 0Lux	
주간/야간	자동 스위치 (ICR) 가 있는 IR 차단 필터	
셔터	자동/수동, 1초 ~ 1/100000초	
조정 각도	팬: 3° ~ 360°, 틸트: 0° ~ 75°	
S/N	> 52 dB	
WDR	DWDR	
렌즈		
초점 거리	2.8 mm	4.0 mm
Iris Type	고정	
Iris	F2.0	
화각(수평)	94.3°	73.4°
화각(수직)	52.2°	40.4°
화각(사각)	99.6°	79.5°
렌즈 타입	고정	
DORI		
DORI 거리(렌즈)	2.8 mm	4 mm
DORI 거리(감지)	63.0 m (206.7 ft.)	90.0 m (295.3 ft.)


DORI 거리(관찰)	25.2 m (82.7 ft.)	36.0 m (118.1 ft.)
DORI 거리(인식)	12.6 m (41.3 ft.)	18.0 m (59.1 ft.)
DORI 거리(식별)	6.3 m (20.7 ft.)	9.0 m (29.5 ft.)
조명		
보조 조명	IR	
조명 거리(IR)	30 m (98.4 ft.)	
파장	850 nm	
IR 켜짐/꺼짐 컨트롤	자동/수동	
비디오		
비디오 압축	Ultra 265, H.265, H.264	
H.264 코드 프로파일	기본 프로필, 주요 프로필, 높은 프로필	
프레임 속도	메인 스트림: 5 MP (2592 × 1944), 최대 20 fps; 4 MP (2560 × 1440), 최대 20 fps; 3 MP (2304 × 1296), 최대 20 fps; 1080P (1920 × 1080), 최대 30 fps; 720P (1280 × 720), 최대 30 fps 서브 스트림: 640 × 360, 최대 30 fps; 2CIF (704 × 288), 최대 30 fps; CIF (352 × 288), 최대 30 fps	
비디오 비트 전송률	128 Kbps ~ 6144 Kbps	
U-code	지원	
OSD	최대 4개의 OSD	
프라이버시 마스크	최대 4개 영역	
ROI	지원	
비디오 스트림	듀얼 스트림	
이미지		

화이트 밸런스	자동, 야외, 미세 조정, 나트륨등, 잠김, 자동2, 영역 화이트 밸런스
디지털 노이즈 제거	2D/3D DNR
스마트 IR	지원
이미지 회전	보통, 수직 반전, 수평 반전, 180°
디워핑	N/A
HLC	지원
BLC	지원
디포그	디지털 디포그
이미지 안정화	N/A
이벤트	
기본 감지	인체 감지 2.0, 움직임 감지, 오디오 감지
기본 기능	워터마크, IP 주소 필터링, 액세스 정책, ARP 보호, RTSP 인증, 사용자 인증, HTTP 인증
오디오	
오디오 압축	G.711U, G.711A
오디오 비트레이트	64 Kbps
양방향 오디오	N/A
억제	지원
샘플링 레이트	8 kHz
저장 장치	
엣지 스토리지	N/A
네트워크	

프로토콜	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, QoS, SSL/TLS
호환성 통합	API, SDK
사용자/호스트	최대 32명 사용자. 사용자 레벨 3단계: 관리자, 일반 사용자, 운영자
보안	Password Protection, 강력한 비밀번호, HTTPS Encryption, Export Operation Logs, RTSP용 기본 및 다이제스트 인증, HTTP용 다이제스트 인증, TLS 1.2, ONVIF용 WSSE 및 다이제스트 인증
고객	EZStation, APP
웹 브라우저	플러그인 불필요 라이브 뷰: Chrome 57+, Firefox 58+, Edge 16+, 플러그인 필요 라이브 뷰: IE 10+, Chrome 45+, Firefox 52+, Edge 79+
인터페이스	
오디오 I/O	N/A
알람 I/O	N/A
시리얼 포트	N/A
내장 마이크	지원
내장 스피커	N/A
WIFI	N/A
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
비디오 출력	N/A
인증	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
안전성	CE LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
환경	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);

보호	IP67 (IEC 60529) IK10 (IEC 62262)
일반	
전원	DC 12 V±25%, PoE (IEEE 802.3af)
전력 소비량	최대 3.9 W
전원 인터페이스	Ø5.5 mm 동축 전원 플러그
크기	Ø111 mm × 82.5 mm (Ø4.4" × 3.2") (Ø × H)
무게	0.35 kg (0.77 lb.)
재료	메탈+플라스틱
작업 환경	-30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결)
저장 환경	-30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결)
서지 보호	4 KV
초기화 버튼	N/A
웹 클라이언트 언어	4개 언어: 영어, 러시아어, 스페인어, 베트남어

크기

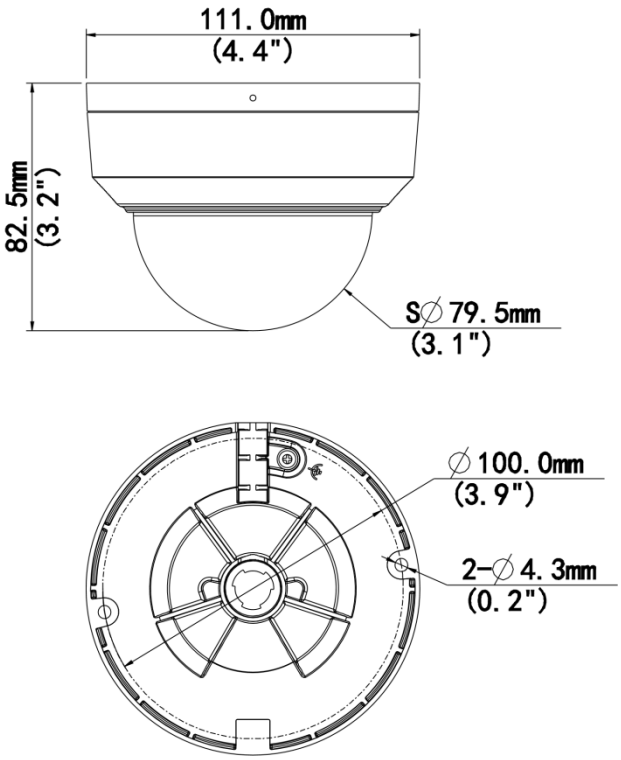

액세서리

TR-JB03-G-IN	HS-205S	TR-UM06-E-IN
Junction Box for Mini Fix-dome(Support wiring from behind)	Sunshade Shell for Fixed Focus Dome	Slant Mounting Bracket for Fixed Dome
		
TR-A01-IN	**TR-SE24-IN**	**TR-SE24-A-IN**
NPT 3/4'' Waterproof Cable Gland	Dome Pendent Mounting Pole 200mm	Dome Pendent Mounting Pole 500mm
		

TR-CM24-IN Dome Pendent Mounting Bracket(Indoor)	**TR-JB07/WM03-G-IN-V2** Wall Mounting Assembling Bracket For 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera	**TR-WM03-D-IN-V2** Wall Mounting Bracket for 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera
		
TR-UC08-C-V2 Bullet&Dome Corner Mounting Bracket	**TR-UP06-C-IN-V2** Pole Mounting Bracket for Bullet Junction Box Only	**TR-FM116** In-ceiling Bracket for Fix-dome
		
TR-WM07P-B Dome Wall Mounting Plastic Bracket		
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.