

# Infrared Strobe Light

## LAMP-IS16@A-F-OS



## Features


- Elegant appearance, integrated structure design, safety and convenient.
- Supports synchronous video illumination.
- Uniform illumination delivers clear image, no smearing or overexposure.
- Pulse signal self-test, no need for setup, automatic high-frequency illumination based on the digital pulse signal of the camera unit.
- Wide voltage allows AC 176V to 264V mains power supply.
- All-weather operation, applicable to harsh environments.
- IP66 protection level, waterproof and dustproof.

## Specifications

Model	LAMP-IS16@A-F-OS
Structure	
Tail cable	1 x power input, 1 x strobe trigger input
Power	30W
Be in common use	
Weight	1.5 kg
Ingress protection	IP66
Bracket rotation angle	-90° to 90°
Dimensions (L × W × H)	1159×230×61mm
Power supply	110 ~ 220Vac
LED strobe	
Trigger mode	Level trigger, switch trigger

Trigger frequency	50Hz/60Hz
Beam angle	0-40%
Light type	Infrared strobe light

## Dimensions

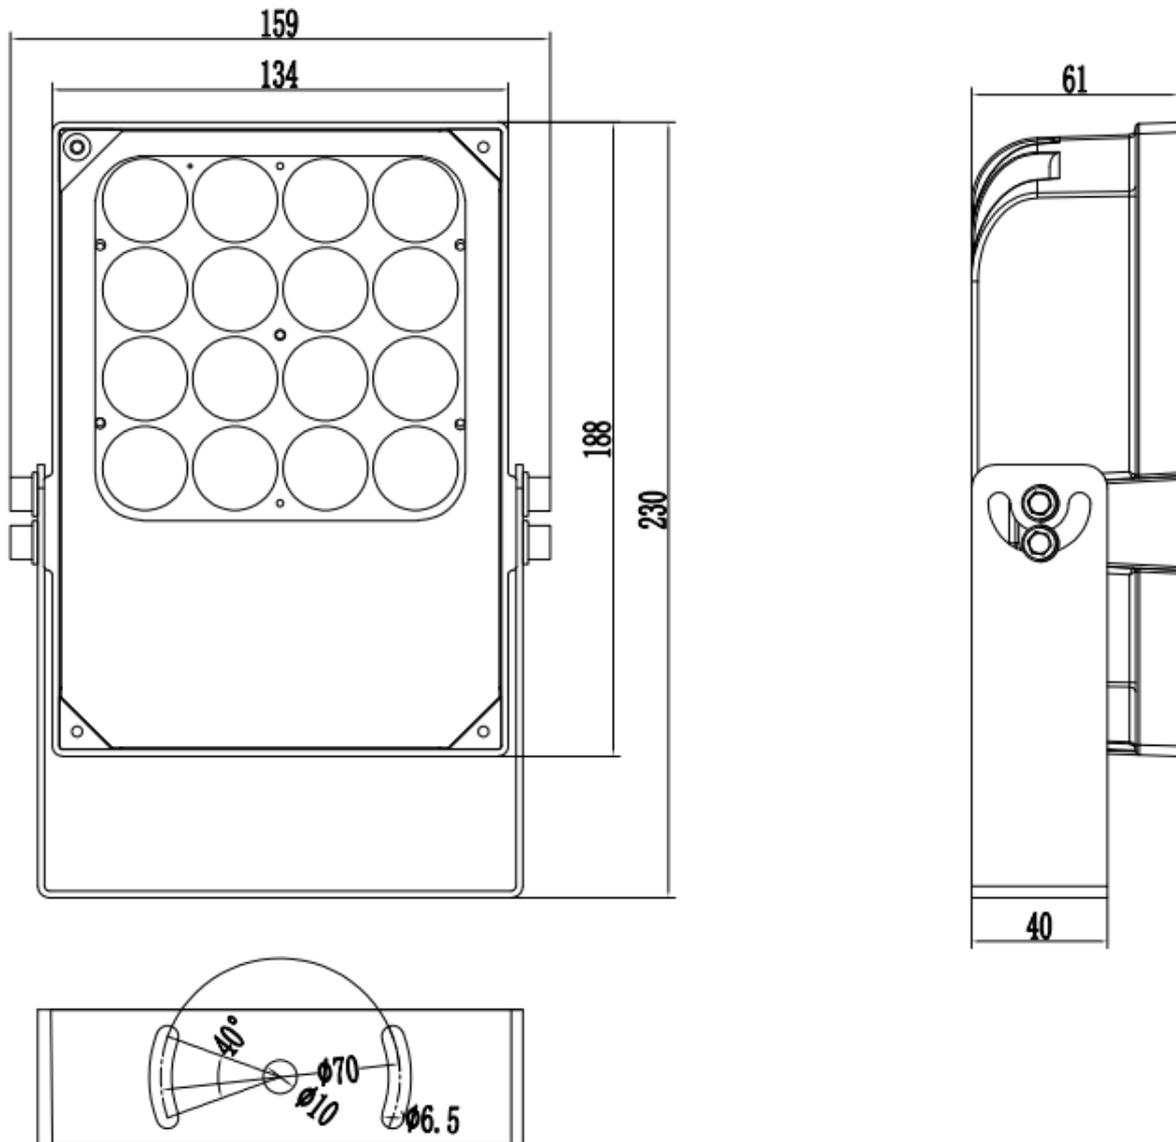

# Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。