


# Unmanaged Harsh PoE Switch ISW2000-4T2GP-POE-IN

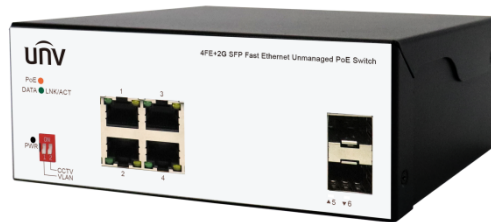

## 주요 특징


- PoE supports IEEE 802.3af/at standards and provides a maximum output of 30W for each port.
- Multiple working modes to address your business needs: VLAN, CCTV.
- VLAN mode: Downlink ports can communicate only with uplink ports.
- CCTV mode: The port is forced to speed down to 10Mbps transmission rate. Data transmission and power supply distance up to 250 meters. Downlink ports can communicate only with uplink ports.
- Supports IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control.
- Panel indicators monitor working status and assist in fault analysis.
- Operating temperature: -30°C to 65°C.

## 사양

Model	ISW2000-4T2GP-POE-IN
Hardware Specification	
Standards	IEEE802.3、IEEE802.3u、IEEE802.3z、IEEE802.3ab、IEEE802.3x、IEEE802.3af、IEEE802.3at
Ports Type	4*10/100Mbps RJ45 Ports 2*1000Mbps SFP Slots
Switching capacity	4.8Gbps
Jumbo Frame	16KBytes
Forwarding performance	3.57Mpps
Packet Buffer	2 M bit
MAC	4K

Transfer Mode	Store-and-forward
Dimensions (W×D×H)	145*109*58mm
Operating Temperature	-30°C to 65 °C
Operating Humidity	5% ~ 95% non-condensing
Storage Humidity	0% ~ 95% non-condensing
Indicator	PWR, LNK/ACT, PoE,DATA
Electrostatic Standard	Contact ±6KV, Air ±8KV
Surge Protection	Differential mode ±2KV Common mode ±4KV
Power Supply	DC:48-57V, powered by adapter. Max.Power 75W . Adapter: AC100-240V, 50/60Hz

## Installation

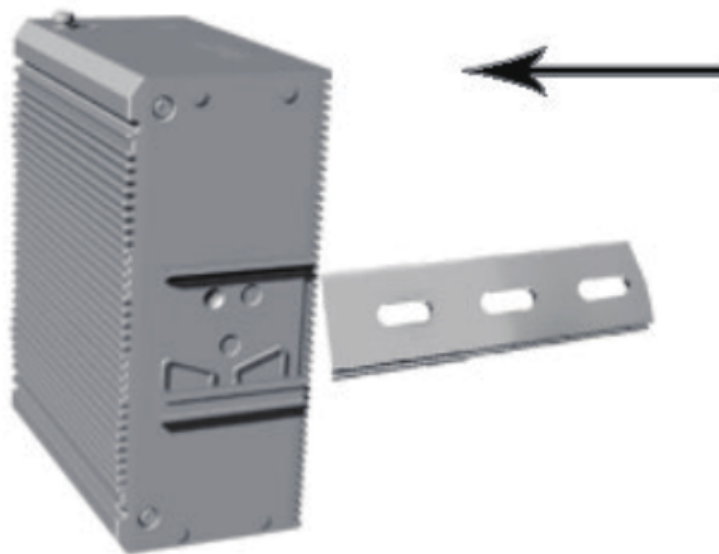

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지.\*제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.