


# Outdoor Unidirectional Parking Guidance Display PKS2301-RG

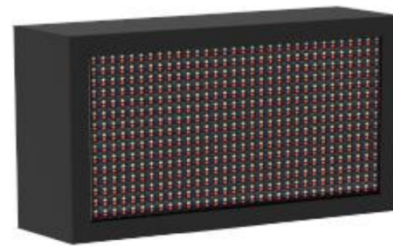

## Features


- Displays welcome messages and real-time availability of parking spaces for the entire parking lot.
- Shows parking space information for a designated area in both directions, guiding drivers to park quickly and efficiently.
- Supports display of English characters, numerals, and arrows; standard communication interfaces include RS485 and RJ45, enabling standalone or networked operation.
- Equipped with high-brightness outdoor LED modules for clear and highly visible content, even under direct sunlight.

## Specifications

|                           |                           |
|---------------------------|---------------------------|
| Model                     | PKS2301-RG                |
| Module                    |                           |
| Pixel Pitch               | 10mm                      |
| Module Resolution (W × H) | 16×32                     |
| Display Parameters        |                           |
| Display size              | W320*H160mm               |
| Display character         | Numbers, letters, symbols |
| Display color             | Red, green, yellow        |
| Processing Image          |                           |
| Brightness (nits)         | 4000                      |
| Color Temperature (K)     | 4500 ~ 5500K              |
| Processing performance    |                           |
| Scanning Mode (S)         | 16S                       |
| Drive Mode                | Constant current          |

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| Refresh Rate (Hz)                   | 1920                                |
| <b>Interface</b>                    |                                     |
| Network interface                   | 100M*1                              |
| Serial port                         | RS485*1                             |
| <b>Electrical</b>                   |                                     |
| Power Supply                        | AC100 ~ 240V                        |
| <b>General</b>                      |                                     |
| Product Dimensions (W × H × D) (mm) | 334*182*55                          |
| Ingress Protection                  | IP54                                |
| Operating Temperature               | -20°C ~ 50°C                        |
| Accessories Included                | M8*25 screw*4, Key*1, Quick guide*1 |

## Dimensions

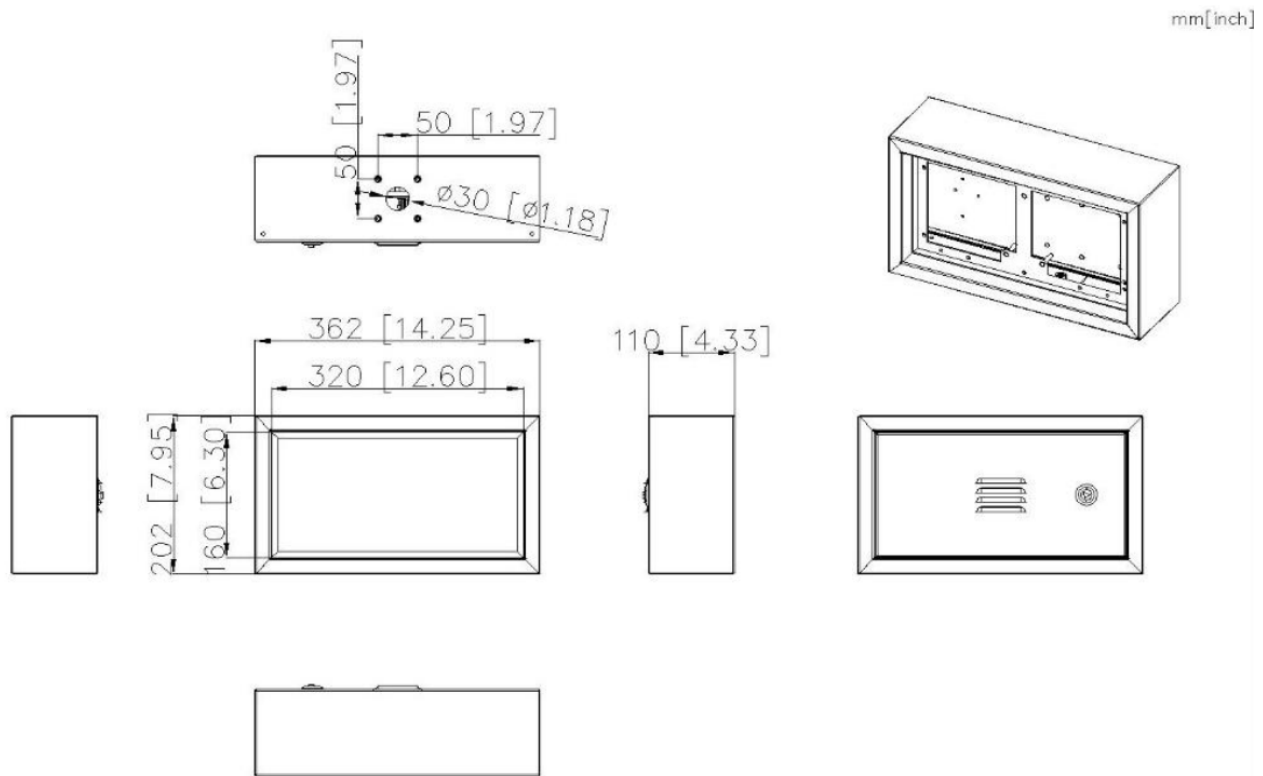

## Accessories

|                                      |  |  |
|--------------------------------------|--|--|
| <b>PKP-LZ-100-50</b>                 |  |  |
| Outdoor Parking Guidance Screen Pole |  |  |
|                                      |  |  |

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.