

**【Datasheet】 UNV LAMP-IH25@M3-F-OS Infrared Strobe Light**  
**Infrared flash Light(Overseas)**

**LAMP-IH25@M3-F-OS**



## Features


- 24 high power IR light LEDs.
- Flash brightness 8 level adjustable.
- Support infrared White explosion switch.
- Life up to more than 10 million times.
- Brightness does not vary with supply voltage fluctuations.
- IP65 protection level, waterproof and dustproof.

## Specifications

Model	LAMP-IH25@M3-F-OS
LED strobe	
Power consumption	Default power is 4.4W(≤ 40W)
Light type	Infrared flash & white flash & infrared strobe
Luminous angle	10°
Trigger frequency	50Hz/60Hz
Optimal fill light distance	15~30m
Trigger mode	Level trigger, switch trigger
Beam angle	0-40%
LED lamp bead wavelength	850nm
White light flash	
White light flash lifetime	More than 10 million times
Output energy	≤100J
Flash brightness	8-level adjustable

Color temperature	≤7000K
Return time	≤50ms
Duration of flash	1/10000s~1/1000s
White light flash trigger mode	Level trigger
Gas explosion level	1~8 level adjustable
Fill light distance	15~30 m
Red and White Switch	Switch by frequency
Filter form	Window shades
Be in common use	
Dimensions (L × W × H)	452*279*279mm
Weight	6.8kg
Ingress protection	IP65
Bracket rotation angle	-45° to 45°
Power supply	110 ~ 220Vac
Length of tail line	4.5m
Communication interface	RS485
Operating environment	-40°C~70°C, 10~95%RH

## Dimensions

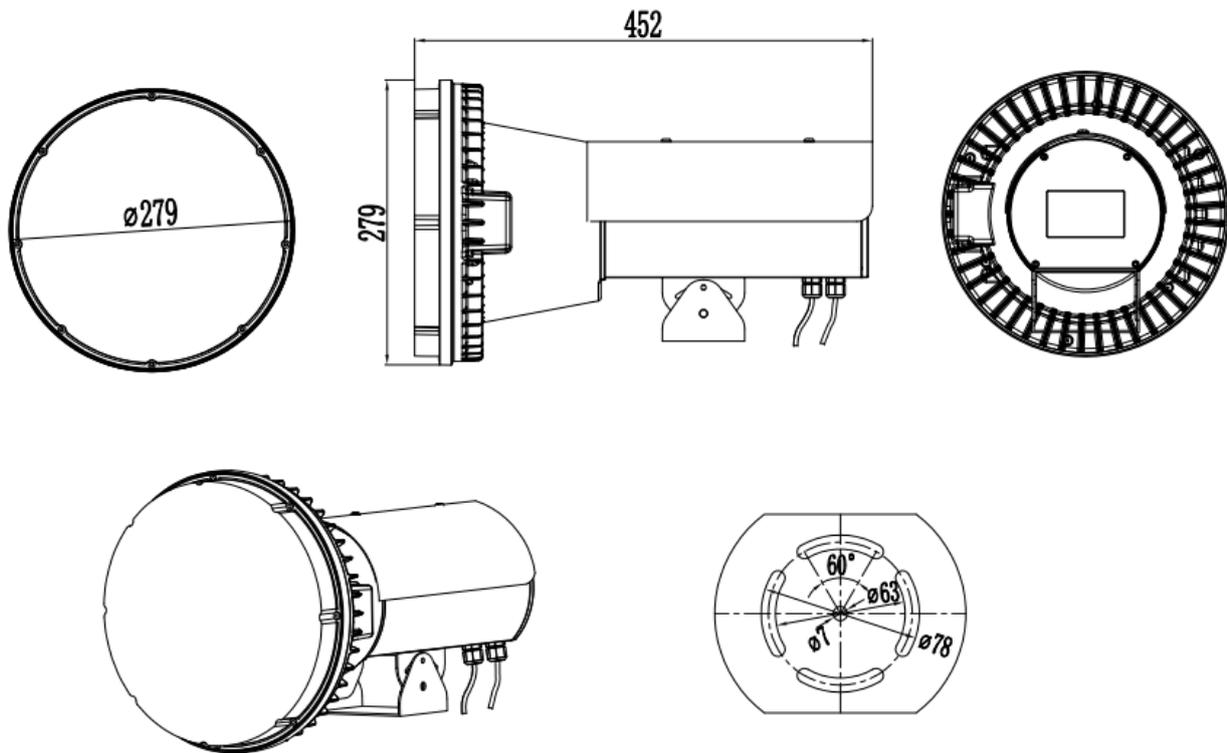

# Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

虽然我试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。