


# Coaxial Cable RG59 CCS Cables

CAB-RG59-200S



## Section View

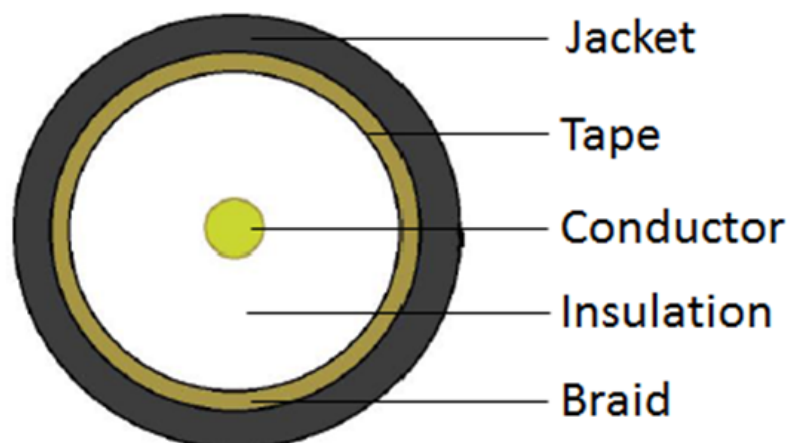

## Specifications

Model	CAB-RG59-200S
<b>Cable</b>	
Product model	CAB-RG59-200S
Product specification	Coaxial Cable RG59 CCS 200m
Packing length	200m
Ambient temperature	-30°C~60°C
<b>Conductor</b>	
AWG	20
Nom.O.D.(mm)	0.81±0.01 mm
Material	CCS(Copper-clad Steel)
<b>Insulation</b>	
Material	FPE
Diameter	3.75±0.1 mm
<b>Tape</b>	
Material	Shielding Aluminum Foil, 15mm width
Thickness	0.04mm
<b>Braid</b>	
Material	CCA(Copper-clad Aluminum)
Braiding Standard	16*7*0.12mm
Braiding Density	85±1%
<b>Impedance</b>	
Impedance	75±3ohms
<b>Sheath</b>	
Material	PVC
Thickness	0.7mm
External O.D.	5.9±0.1mm
Flame Retardant	VW-1
Color	Black
<b>Packing</b>	
Packing	Pull box
Once packing dimension	275*183*275mm
Twice packing dimension	285*383*285mm
Twice packing quantity	2 cases

## Ordering Info

Product Model	Description
CAB-RG59-200S	RG59 Coaxial Cable,200m,Single-core CCS

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.