


## SF/UTP Category 6 Cables

# CAB-LC3200A-IN

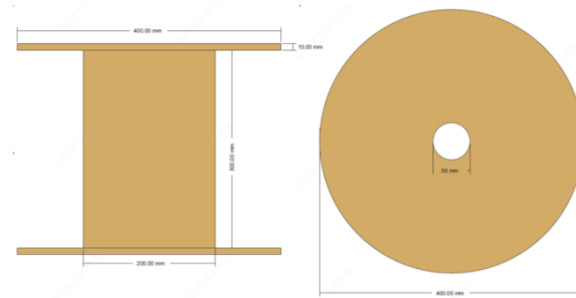

## Specifications

Model	CAB-LC3200A-IN
Cable	
Product model	CAB-LC3200A-IN
Test Standard	ISO/IEC11801、TIA-568-C.2、YD/T1019
Product specification	HSYV-6 4×2×0.585
Packing length	305±1m
Ambient temperature	-20°C~60°C
Rip-cord	Yes
Crossing backbone	Yes
Conductor	
AWG	23
Nom.O.D.(mm)	0.585±0.05 mm
DC resistance	≤65.8 Ω/km
Insulation	
Material	HDPE
Thickness	0.2±0.02 mm
Diameter	1.16±0.05 mm
Color	Blue/White- Blue,Green/White-Green,Orange/White-Orange,Brown/White-Brown
Pitch	
Offset pitch	≤20 mm
Cable pitch	≤120 mm
Sheath	

Material	PVC(complies RoHS/REACH)
Thickness	0.6±0.05 mm
External O.D.	7.6±0.4 mm
Tensile strength	>13.5 Mpa
Color	Black
<b>Surface Printing</b>	
Letter height	3.0±0.3 mm
Color	White
Print error / Space	1±0.005 m
Case number	Yes
<b>Packing</b>	
Packing	Wooden shaft

## Ordering Info

Product Model	Description
CAB-LC3200A-IN	Cat6(Shielded),305m,Black

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.