

디지털 비디오 레코더 XVR301-F Series



주요 특징

- H.265/H.264 비디오 포맷 지원
- 동축 케이블을 통한 오디오 지원(TVI 카메라에만 해당)
- TVI에서 UNV 아날로그 카메라의 듀얼 조명 제어
- 동축 케이블을 통한 아날로그 카메라 업그레이드 지원
- 어댑티브 액세스를 통해 TVI, AHD, CVI, CVBS, IP 카메라 지원
- 4/8/16채널 BNC 입력
- 1채널 HDMI 출력, 최대 1920*1080의 1채널 VGA 출력 지원
- HDMI 및 VGA 동시 출력
- 동축 케이블을 통한 긴 전송 거리
- ONVIF 및 RTSP 프로토콜의 메인스트림 카메라 지원


사양

Model	XVR301-04F	XVR301-08F	XVR301-16F
Video/Audio Input			
IP Video Input	2-ch		
Analog Video Input	4-ch, BNC	8-ch, BNC	16-ch, BNC
Max IP Video Input	6-ch	10-ch	18-ch
Supported Analog Camera Types	Support AHD input: 1080P@30fps 720P@30fps Support TVI input: 1080P@30fps 720P@30fps Support CVI input: 1080P@30fps 720P@30fps Support CVBS input		
Video/Audio Output			
HDMI Output	HDMI: 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
VGA Output	VGA: 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
Live View Display	HDMI/VGA: 1/4/6/8/9	HDMI/VGA: 1/4/6/8/9/16	HDMI/VGA: 1/4/6/8/9/25
Encoding/Decoding			
Recording Resolution	1080P Lite/720P/D1		
Recording Frame Rate	Main stream: 1080P Lite@25fps Sub stream: D1@25fps Main stream: 720P@30fps Sub stream: D1@30fps	Main stream: 1080P Lite@15fps Sub stream: D1@12fps Main stream: 720P@15fps Sub stream: D1@15fps	Main stream: 1080P Lite@12fps Sub stream: D1@12fps Main stream: 720P@15fps Sub stream: D1@15fps
Audio Sample Rate	8 kHz, 16 bit per channel		
Audio Bit Rate	64 Kbps per channel		
Decoding Capability	Analog:4 x 1080P Lite@25, 4 x 720P@30 IP: 1 x 6MP@20, 2 x 1080P@30	Analog:8x 1080P Lite @15, 8x 720P @15 IP: 1 x 6MP@20, 2 x 1080P@30	Analog:16x 1080P Lite@12, 16x 720P@15 IP: 1 x 8MP@30, 2 x 4MP@30, 4 x 1080P@30, 8 x 720P@30, 16 x D1@30
Two-way Audio			
Two-way Audio	N/A		
Analog Snapshot			
FTP/Schedule/Event Snapshot	FTP/Event snapshot:4-ch snapshot, up to 704*576	FTP/Event snapshot:8-ch snapshot, up to 704*576	FTP/Event snapshot:16-ch snapshot, up to 704*576


	resolution, Schedule snapshot: not supported	resolution, Schedule snapshot: not supported	resolution, Schedule snapshot: not supported
Network			
Incoming Bandwidth	24Mbps (Up to 32Mbps after all analog channel conversion)	24Mbps (Up to 40Mbps after all analog channel conversion)	24Mbps (Up to 56Mbps after all analog channel conversion)
Outgoing Bandwidth	48Mbps	64Mbps	64Mbps
Remote Users	128		
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP		
Browser(Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+		
Smart			
Analog Smart by XVR	Ultra Motion Detection (UMD)		
VCA Search	Behavior Search		
Smart Functions by XVR	4-ch (UMD)	8-ch (UMD)	8-ch (UMD)
Alarm			
General Alarm	Motion		
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal		
GUI Language			
GUI Language	20 languages: English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian		
Hard Disk			
SATA	1 SATA interface		
Capacity	Up to 6 TB for each HDD		
External Interface			
Network Interface	1 RJ45 10 M/100 M self-adaptive Ethernet Interface		
USB	Rear panel: 2 × USB2.0		
Power Supply	DC 12 V/1.5 A		
Working Environment			
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)		
Working Humidity	≤ 90% RH (non-condensing)		
Power Consumption (without HDD)	≤ 10W		
Dimensions			
Weight (without HDD)	≤0.6 Kg (1.32lb)	≤0.6 Kg (1.32lb)	≤0.85 Kg (1.87lb)
Dimensions	190mm × 202mm × 42mm (7.5" × 7.9" × 1.6")	190mm × 202mm × 42mm (7.5" × 7.9" × 1.6")	253mm × 212mm × 42mm (10.0" × 8.4" × 1.7")
Certification			
Certification	CE, FCC, UL, RoHS, WEEE		
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035		
FCC	Part15 Subpart B		



크기

Aggregate product size diagram using XVR301-04F as an example

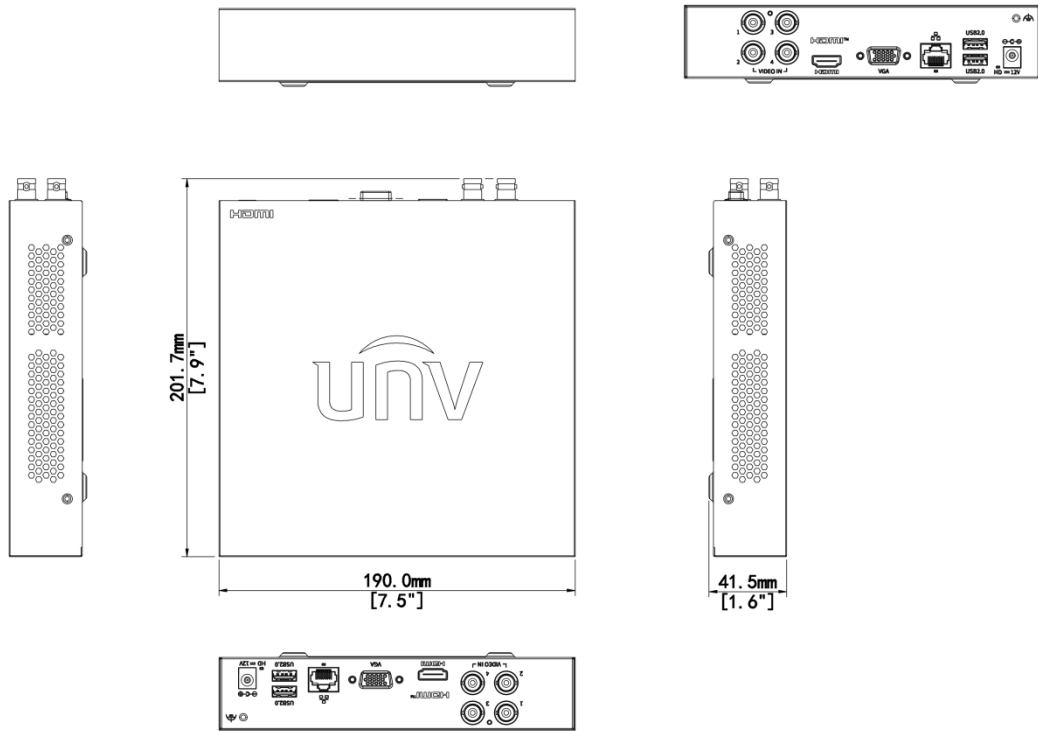

Rear Panel

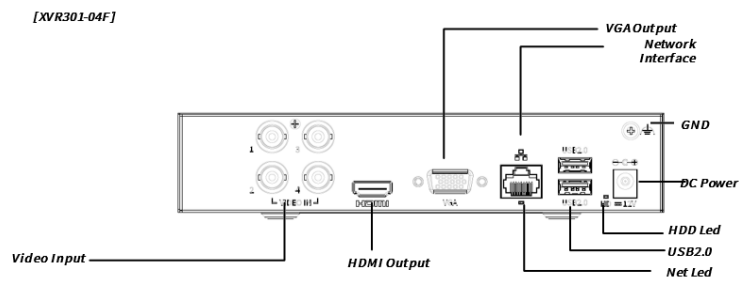

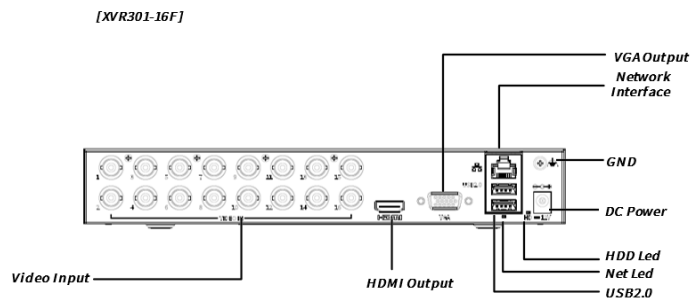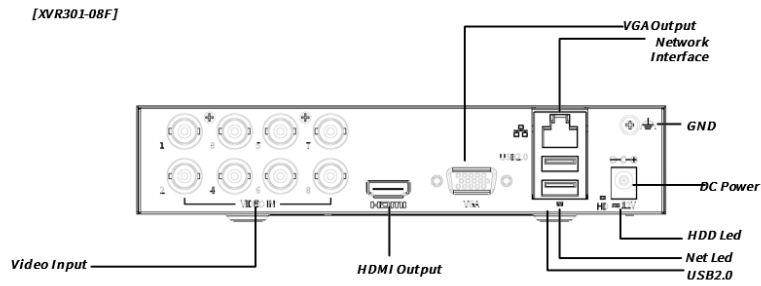

Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。