# Single Door Recognition Access Control Controller
OER-SR12

Overview

OER-SR12 are high-performance and highly reliable access controllers. The products provide TCP/IP wired network communication interfaces and specialized access control and management functions to fit various complex access control scenarios.

Features

- TCP/IP communication with secure reliability.
- Large capacity: Supports up to 42,000 cards and 200,000 events.
- Different mounting holes for easy installation.
- Supports remote upgrade.
- Supports real-time monitoring configuration.
- Supports issuing cards using card readers.

Specifications

Model	OER-SR12
Hardware Specification	
Dimensions (L x W x H)	235mm x 305mm x 76mm
Weight	2.2KG
Door Control	1 door
Card Reader	2
Wiegand Input Interface (Max DC14V Withstand Voltage)	2
Wiegand Format	WG18/26/34/66
Relay Output	1 set (7A)

Door Magnetic Port	1
Fire Module Expansion Port	1
Operating Environment	Indoor（-10℃ to +65℃）
Power Supply	AC 100V to 240V(50Hz or 60Hz)
Mount	Wall mount
Basic Business	
Communication Mode	TCP/IP
Specification Index	
Card Capacity	42000
Event Capacity	200000

Ordering Info

Product Model	Description
OER-SR12	Single Door Recognition Access Control Controller

Accessories

OEC-R3H-M	**OEC-R3H-MK**	**OEA-ML12-280**
Wall Mounted Mifare Card Reader	Wall Mounted Mifare Keyboard Card Reader	Single Door Electromagnetic Lock 280KG

OEA-ML22-280	OEP-GP2	OEP-GM5
Double Door Electromagnetic Lock 280KG	Open Door Button	Open Door Button

OEP-GM6-R	OEP-GP6	OEK-M11
Infrared Induction Switch Button	Emergency Exit Button	Mifare Card

Dimensions
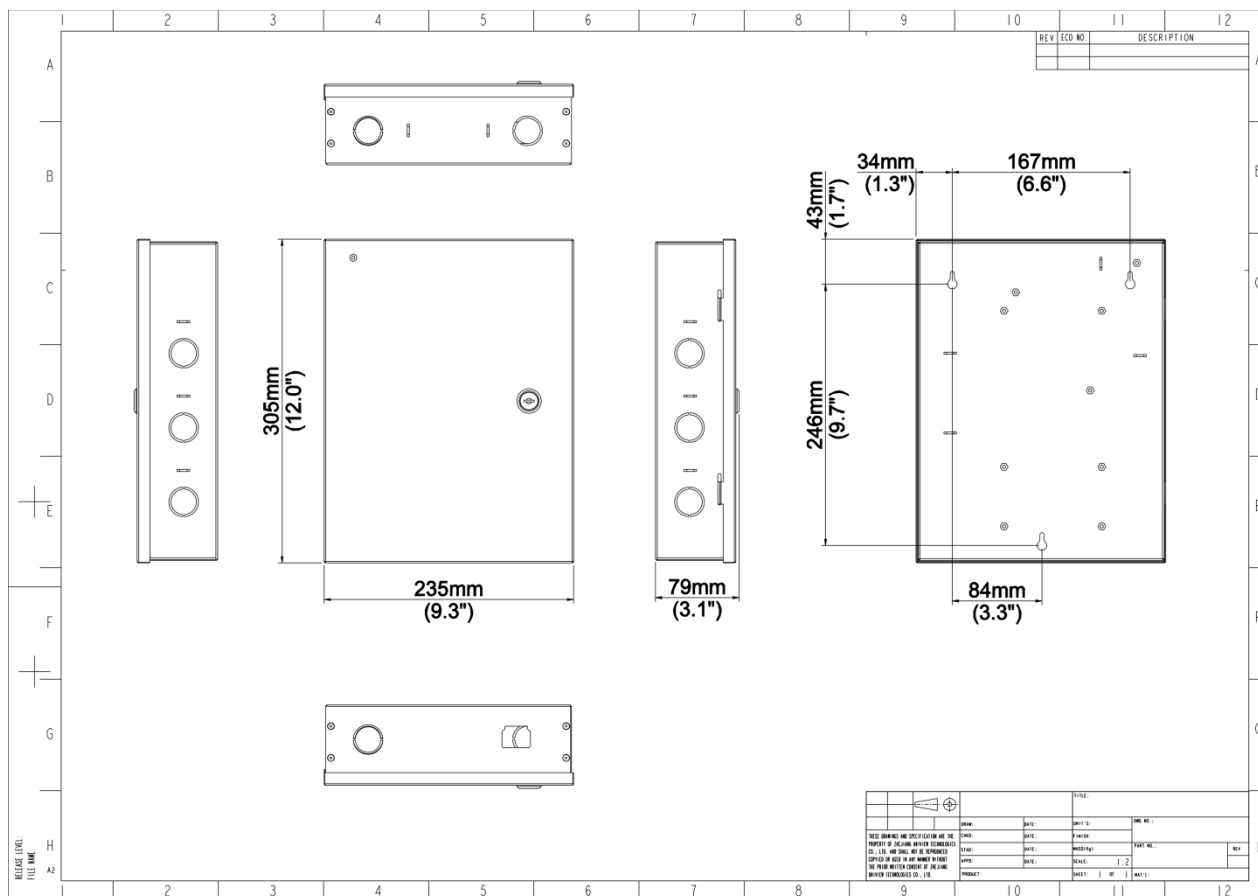
Notes

- Supports 100 Mbps unmanaged switches only.

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China