
Outdoor Tridirectional Parking Guidance Display
PKS2303-RG



Metal shell

주요 특징


- Displays welcome messages and real-time availability of parking spaces for the entire parking lot.
- Shows parking space information for a designated area in both directions, guiding drivers to park quickly and efficiently.
- Supports display of English characters, numerals, and arrows; standard communication interfaces include RS485 and RJ45, enabling standalone or networked operation.
- Equipped with high-brightness outdoor LED modules for clear and highly visible content, even under direct sunlight.

사양

Model	PKS2303-RG
Module	
Pixel Pitch	10mm
Module Resolution (W × H)	16×32
Display Parameters	
Display size	W320*H480mm
Display character	Numbers, letters, symbols
Display color	Red, green, yellow
Processing Image	
Brightness (nits)	4000
Color Temperature (K)	4500 ~ 5500K
Processing performance	

Scanning Mode (S)	16S
Drive Mode	Constant current
Refresh Rate (Hz)	1920
Interface	
Network interface	100M*1
Serial port	RS485*1
Electrical	
Power Supply	AC100 ~ 240V
General	
Product Dimensions (W × H × D) (mm)	942*182*55
Ingress Protection	IP54
Operating Temperature	-20℃ ~ 50℃
Accessories Included	M8*25 screw*4, Key*1, Quick guide*1

크기

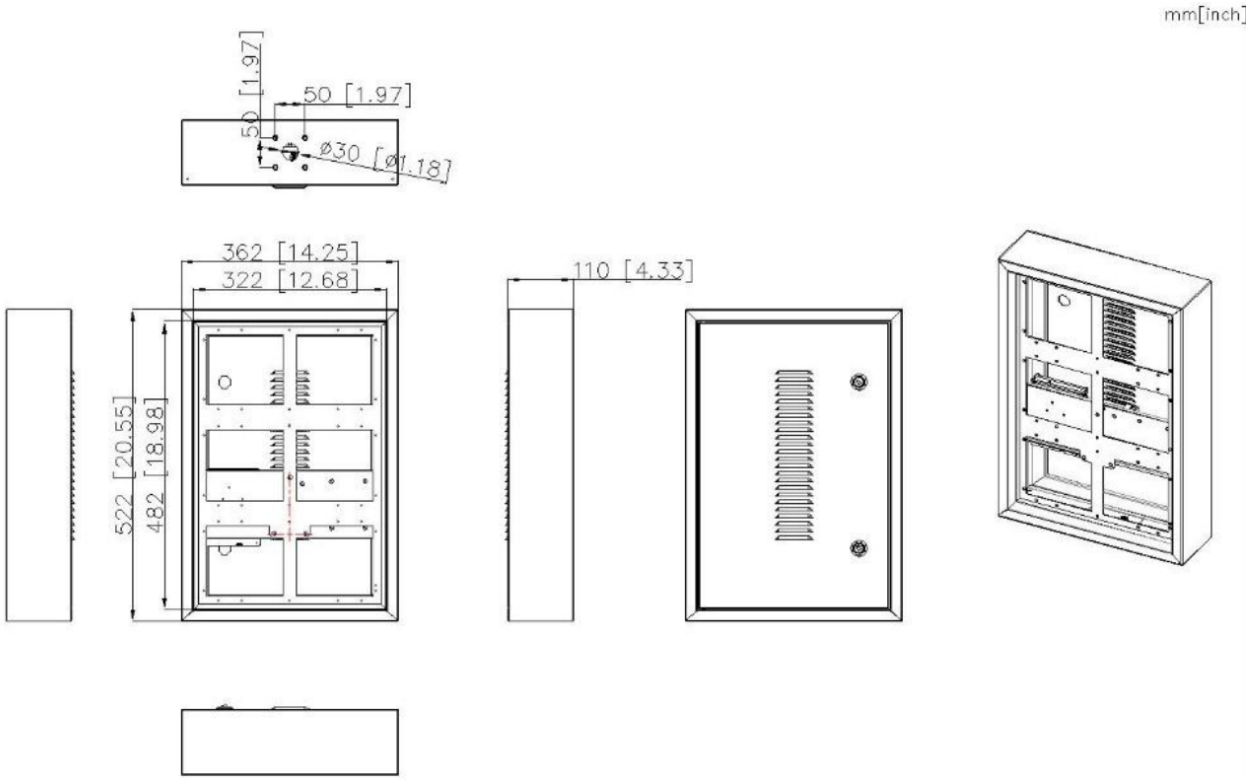

액세서리

PKP-LZ-100-50 Outdoor Parking Guidance Screen Pole		
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.