


## 4MP Indoor Pan & Tilt Wi-Fi Camera

### Uho-S2-M4

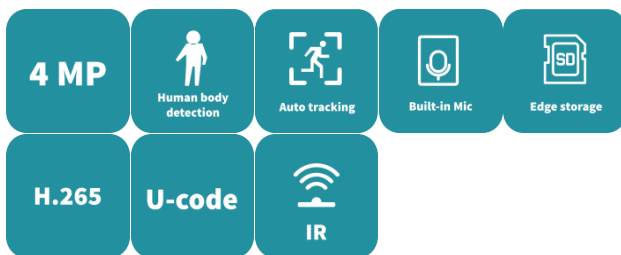

## Features

- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2560\*1440)@25/20fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps
- Ultra 265, H.265, H.264
- Built-in Mic & Speaker, support two-way audio, offer better interaction
- IR night vision, up to 10m (33ft) IR distance
- Support 512 G Micro SD card
- Wi-Fi connection and easy installation


## Specifications

| Model                      | Uho-S2-M4                                                                                                                                                                                                         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Camera                     |                                                                                                                                                                                                                   |
| Max Resolution             | 4 MP                                                                                                                                                                                                              |
| Sensor                     | 1/3.0"CMOS                                                                                                                                                                                                        |
| Min. Illumination          | Colour: 0.01 lux (F2.0, AGC ON)<br>0 lux with IR on                                                                                                                                                               |
| Day/Night                  | IR-cut filter with auto switch (ICR)                                                                                                                                                                              |
| Shutter                    | Auto/Manual, 1/4 to 1/100000 s                                                                                                                                                                                    |
| S/N                        | >52 dB                                                                                                                                                                                                            |
| WDR                        | DWDR                                                                                                                                                                                                              |
| Lens                       |                                                                                                                                                                                                                   |
| Focal Length               | 4.0 mm                                                                                                                                                                                                            |
| Iris Type                  | Fixed                                                                                                                                                                                                             |
| Iris                       | F2.0                                                                                                                                                                                                              |
| Field of View (H)          | 79.0°                                                                                                                                                                                                             |
| Field of View (V)          | 42.3°                                                                                                                                                                                                             |
| Field of View (D)          | 85.1°                                                                                                                                                                                                             |
| Illuminator                |                                                                                                                                                                                                                   |
| Supplemental Light         | IR                                                                                                                                                                                                                |
| Illumination Distance (IR) | Up to 10m (33ft)                                                                                                                                                                                                  |
| Wavelength                 | 850 nm                                                                                                                                                                                                            |
| IR On/Off Control          | Auto/Manual                                                                                                                                                                                                       |
| Video                      |                                                                                                                                                                                                                   |
| Video Compression          | Ultra 265, H.265, H.264                                                                                                                                                                                           |
| Frame Rate                 | Main Stream: 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 2MP (1920*1080), Max 30fps; 720P (1280*720), Max 30fps;<br>Sub Stream: 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; |
| Video Bit Rate             | 128 Kbps to 6144 Kbps                                                                                                                                                                                             |
| U-code                     | Support                                                                                                                                                                                                           |
| OSD                        | Up to 2 OSDs                                                                                                                                                                                                      |
| Privacy Mask               | Support (only NVR)                                                                                                                                                                                                |
| ROI                        | Up to 8 areas                                                                                                                                                                                                     |
| Video Stream               | Dual streams                                                                                                                                                                                                      |
| Image                      |                                                                                                                                                                                                                   |
| White Balance              | Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2                                                                                                                                                              |
| Digital Noise Reduction    | 2D/3D DNR                                                                                                                                                                                                         |
| Smart IR                   | Support                                                                                                                                                                                                           |
| Flip                       | Normal, Flip vertical, Flip horizontal, 180°                                                                                                                                                                      |
| Dewarping                  | N/A                                                                                                                                                                                                               |
| HLC                        | N/A                                                                                                                                                                                                               |
| BLC                        | N/A                                                                                                                                                                                                               |

|                        |                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------|
| Defog                  | Digital defog                                                                                                      |
| Events                 |                                                                                                                    |
| Basic Detection        | Human body detection, Motion detection, Audio detection                                                            |
| General Function       | IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication |
| Intelligent            |                                                                                                                    |
| Auto Tracking          | Support                                                                                                            |
| Audio                  |                                                                                                                    |
| Audio Compression      | G.711U, G.711A                                                                                                     |
| Audio Bitrate          | 64 Kbps                                                                                                            |
| Two-way Audio          | Support                                                                                                            |
| Suppression            | Support                                                                                                            |
| Sampling Rate          | 8 kHz                                                                                                              |
| Storage                |                                                                                                                    |
| Edge Storage           | MicroSD, up to 512 GB                                                                                              |
| Network Storage        | ANR                                                                                                                |
| Network                |                                                                                                                    |
| Wi-Fi                  | 2.4G Wi-Fi (IEEE802.11b/g/n), built-in antenna                                                                     |
| Protocols              | IPv4, TCP, UDP, DHCP, RTSP, DNS, DDNS, NTP, HTTP                                                                   |
| Compatible Integration | API                                                                                                                |
| Client                 | APP, Uniarch client                                                                                                |
| Web Browser            | Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+                                              |
| Wi-Fi                  |                                                                                                                    |
| Wireless Standards     | IEEE802.11b/g/n                                                                                                    |
| Frequency Range        | 2.4 GHz to 2.4835 GHz                                                                                              |
| Channel Bandwidth      | 20 MHz Support                                                                                                     |
| Modulation Mode        | 802.11b: CCK, QPSK, BPSK<br>802.11g/n: OFDM/HT                                                                     |
| Wi-Fi Security         | 64/128-bit WEP, WPA-PSK/WPA2-PSK                                                                                   |
| Transmit Power         | 802.11b: 17±1.5 dBm@11 Mbps802.11g: 14±1.5 dBm@54 Mbps802.11n: 12.5±1.5 dBm@150 Mbps                               |
| Receive Sensitivity    | 802.11b: -90 dBm@11 Mbps (Typical)802.11g: -75 dBm@54 Mbps (Typical)802.11n: -74 dBm@150 Mbps (Typical)            |
| Transmission Rate      | 802.11b: 11 Mbps802.11g: 54 Mbps802.11n: up to 150 Mbps                                                            |
| PTZ                    |                                                                                                                    |
| Pan Range              | 0° ~ 340°                                                                                                          |
| Pan Speed              | 17°/s ~ 50°/s<br>Preset speed: 50°/s                                                                               |
| Tilt Range             | -5° ~ 55°                                                                                                          |
| Tilt Speed             | 17°/s ~ 50°/s<br>Preset speed: 50°/s                                                                               |
| Number of Presets      | 20                                                                                                                 |
| Interface              |                                                                                                                    |
| Audio I/O              | N/A                                                                                                                |

|                     |                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------|
| Alarm I/O           | N/A                                                                                        |
| Built-in Mic        | Support                                                                                    |
| Built-in Speaker    | Support                                                                                    |
| WIFI                | Support                                                                                    |
| Network             | N/A                                                                                        |
| Certification       |                                                                                            |
| EMC                 | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035)<br>FCC (FCC 47 CFR part15 B)   |
| RF                  | FCC ID (FCC CFR 47 part15 C)<br>CE RED (EN 301 489-1, EN 301 489-17, EN 300 328, EN 62311) |
| Safety              | CE LVD (EN 62368-1)                                                                        |
| Environment         | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);                                      |
| General             |                                                                                            |
| Power               | DC 5V/1.5A<br>Micro USB interface                                                          |
| Dimensions          | Φ80 x 120mm (Ø3.1" x 4.8")                                                                 |
| Weight              | 0.18kg(0.40lb)                                                                             |
| Working Environment | -10°C~55°C(-14°F ~ 131°F), Humidity: ≤95% RH (non-condensing)                              |
| Storage Environment | -10°C~55°C(-14°F ~ 131°F), Humidity: ≤95% RH (non-condensing)                              |
| Reset Button        | Support                                                                                    |
| LED Indicator       | 1, red/blue                                                                                |

## Dimensions

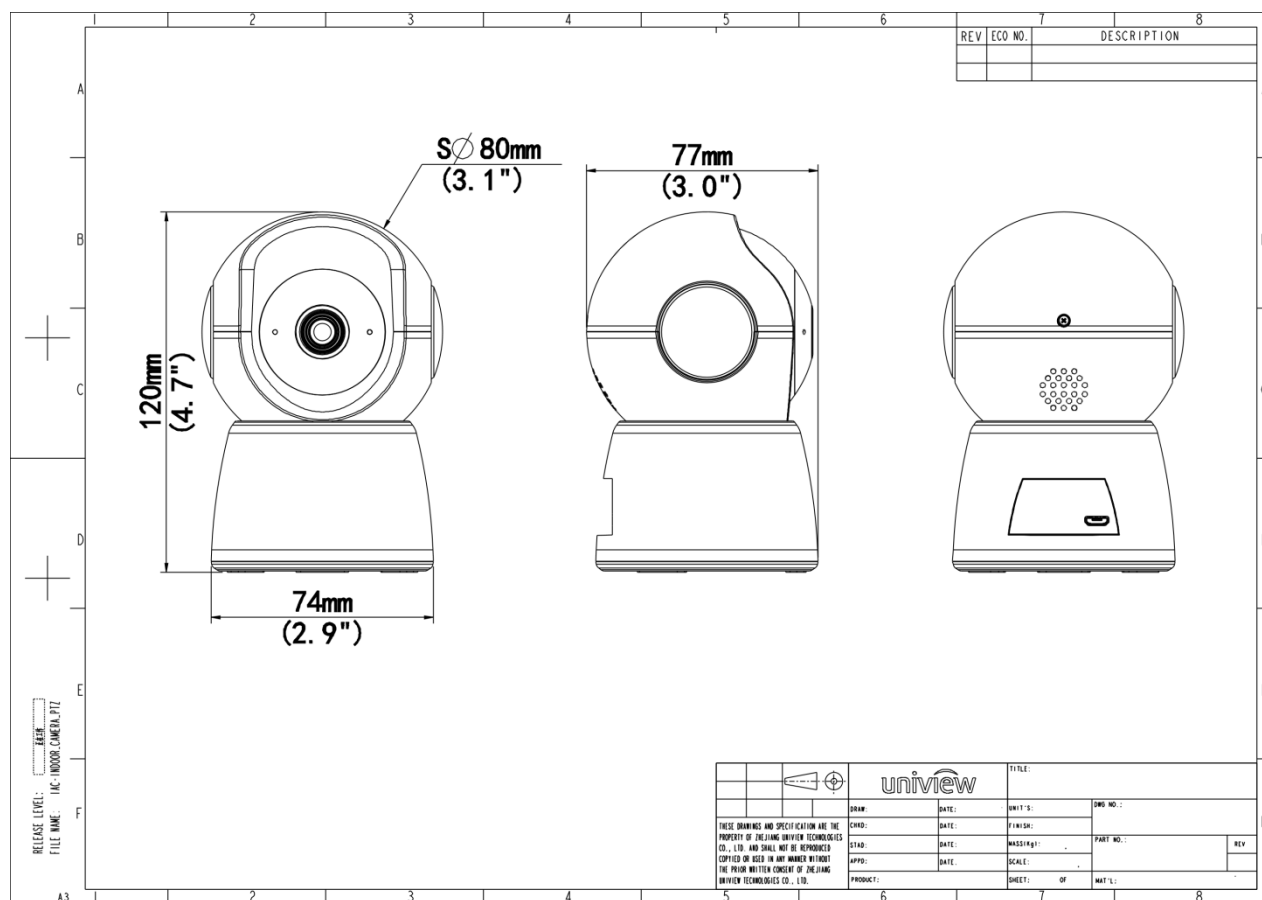

**Zhejiang Uniview Technologies Co., Ltd.**



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document.