UNV Villa Door Station

OEU-201S-HMK-Z



Overview

OEU-201S-HMK-Z villa door station is a terminal device in the digital building intercom system, with functions of visual intercom, security protection alarm, video surveillance, etc., providing a safe and comfortable living environment for residents. It can be widely used in residential villas.

Features

- Front metal casing.
- Supports batch configuration.
- Supports call and intercom with the connected indoor stations and UNV Link.
- Supports video surveillance, security protection alarm, and tamper alarm.
- Built-in IC card reader.

Specifications

| Model | OEU-201S-HMK-Z |
|------------------------|---------------------|
| Hardware Specification | |
| Operation System | Linux |
| Supplement Light | IR light (adaptive) |
| | Horizontal: 124.3° |
| FOV | Vertical: 67.5° |
| FOV | Diagonal: 147.2° |
| | |

UNV

DATASHEET

| Power Consumption | <10W |
|--------------------------------|---|
| Volume Adjustment | Support |
| Audio Quality | Noise reduction, echo cancellation, auto gain control |
| Audio Input | Built-in mic |
| Audio Output | Built-in speaker |
| Audio Compression Standard | PCM, G711, MP3 |
| Audio Compression Bitrate | 128Kps |
| Ducto sticul such | IP65 (Apply waterproof glue to the gap between the device and the wall. See the quick guide for |
| Protection Level | details), IK08 |
| Power Supply | DC12V ±25%, PoE power supply |
| Weight | 267g |
| Mount Method | Wall mount, supports surface mount, junction box mount, recess mount |
| Network | 100Mbps network interface, supports IEEE802.3af PoE power supply |
| Interface | Power supply*1, network interface*1, RS485*1, door lock interface*2, IO input*4 |
| Dimensions (L x W x H) | 102mm x 31.6mm x 194mm |
| Operating Environment | - 40°C to 60°C, 10% to 90% noncondensing, outdoor |
| Basic Business | |
| WDR | Supports DWDR |
| Protocol | Uniview private protocol |
| Button | Door call button*1, tamper button*1 |
| Network protocol | TCP/IP, IPv4, HTTP, RTP, RTSP, NTP |
| Specification Index | |
| Card Capacity | 10000 |
| Linked Indoor Station Capacity | 20 |
| | |

Ordering Info

| Product Model | Description |
|----------------|--------------------|
| OEU-201S-HMK-Z | Villa Door Station |

Accessories

EP-CS201-Z-NB

201S-Z Surface Installation Sunshade




EP-CSS201-Z-NB 201S-Z Concealed Installation Sunshade and Bracket



UNV

Dimensions

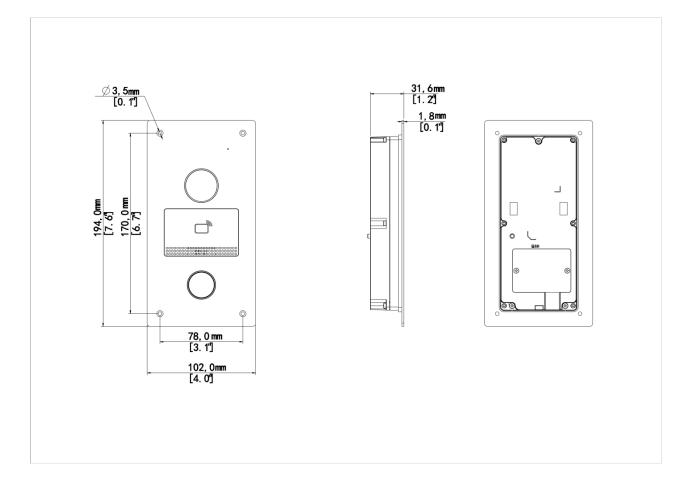

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

 $\ensuremath{\mathbb{C}}$ 2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.