

# 2MP ColorHunter With Smart Dual Light Bullet Analog Camera

UAC-B112-AF28(40)-DL



## Overview

UAC-B112-AF28(40)-DL is a 2MP ColorHunter with smart dual light bullet analog camera with a high-performance 1/3-inch CMOS sensor and 3D noise reduction technology. It supports TVI/AHD/CVI/CVBS, which effectively enhances product adaptability and diversity of networking solutions. With SYV-75-3 or other coaxial cable types, the camera can achieve low-cost, long-distance, and anti-interference mega-pixel HD video transmission without time delay. The camera also supports audio input and synchronous transmission of audio and video. With UNV XVR, our ColorHunter cameras equipped with Smart Dual Light can intelligently switch between IR and white light when detecting a target or not, offering flexible lighting options and enhancing security.

## Features


- High quality imaging with 2MP resolution
- TVI/AHD/CVI/CVBS
- Supports IR-cut filter with auto-switch (ICR)
- Smart Dual Light (only TVI)
- 3D noise reduction technology delivers clean and sharp images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages
- Built-in microphone for high quality audio transmission via coaxial cables

## Specifications

| Model                   | UAC-B112-AF28-DL   | UAC-B112-AF40-DL |
|-------------------------|--|------------------|
| Camera                  |  |                  |
| Max Resolution          | 2 MP   |                  |
| Sensor Size             | 1/3.0" CMOS  |                  |
| Min. Illumination       | 0.01 lux (F2.0, AGC ON)<br>0 lux (Illuminator ON)  |                  |
| Lens                    |  |                  |
| Focus                   | 2.8 mm   | 4.0 mm           |
| Lens Mount              | M12  |                  |
| Angle of View (H)       | 91.5°  | 75.1°            |
| Angle of View (V)       | 51.2°  | 41.8°            |
| Angle of View (D)       | 106.3°   | 86.2°            |
| Illuminator             |  |                  |
| Illuminator Number      | Two IR illuminators; One white-light illuminator   |                  |
| Illumination Distance   | IR: 20m (65.6 ft)<br>White light: 20m (65.6 ft)  |                  |
| Lifetime                | ≥ 60000 hours  |                  |
| Video                   |  |                  |
| Resolution              | 1080P: 1920(H)×1080(V)<br>720P: 1280(H) ×720(V)  |                  |
| Frame Rate              | TVI: 1080P@25fps (default), 1080P@30fps; 720P@25fps, 720P@30fps<br>AHD: 1080P@25fps, 1080P@30fps; 720P@25fps, 720P@30fps<br>CVI: 1080P@25fps, 1080P@30fps; 720P@25fps, 720P@30fps<br>CVBS: PAL, NTSC |                  |
| Shutter Time            | PAL: 1/25 s-1/50000 s, NTSC: 1/30 s-1/50000 s  |                  |
| Image                   |  |                  |
| Exposure Mode           | Four modes: Global (default), BLC, HLC, DWDR   |                  |
| Day/Night               | Three modes: Auto (default), Day, Night  |                  |
| Digital Noise Reduction | 2D/3D  |                  |
| White Balance           | Two modes: Auto (default), Manual  |                  |
| WDR                     | DWDR   |                  |
| Light Mode              | Dual light (default) , Infrared, White light   |                  |
| Flip                    | Supports 180°horizontal flip, 180°vertical flip  |                  |
| Digital Defog           | N/A  |                  |
| Audio                   |  |                  |
| Built-in Mic            | Support  |                  |
| Camera Audio            | TVI: 1080P@25fps, 1080P@30fps<br>CVI: 1080P@25fps, 1080P@30fps   |                  |
| Interface               |  |                  |

|                              |  |
|------------------------------|--|
| Power Interface              | 5.5 mm Power Interface   |
| Video Output                 | BNC, supports TVI/AHD/CVI/CVBS   |
| <b>Operating Environment</b> |  |
| Temperature                  | -30 °C to 60 °C (-22 °F to 140 °F)   |
| Humidity                     | ≤ 95% RH (non-condensing)  |
| Surge Protection             | 4 KV for power, 4 KV for video output interfaces   |
| <b>General</b>               |  |
| Power                        | DC 12 V ± 25%  |
| Power Consumption            | MAX 2.8W   |
| Mount                        | Corner Mount, Pole Mount   |
| Dimensions                   | 140mm*61mm*65mm (L*W*H)  |
| Material                     | Plastic  |
| Weight                       | 142g (0.31lb)  |
| OSD Menu Language            | 11 Languages: English, German, Spanish (Latin America), French, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Turkish |
| <b>Certification</b>         |  |
| EMC                          | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035), FCC (FCC 47 CFR part15 B)   |
| Safety                       | CE-LVD (EN 62368-1)  |
| Environment                  | CE-RoHS (2011/65/EU; (EU) 2015/863); WEEE (2012/19/EU)   |
| Protection                   | IP67 (IEC 60529)   |

## Dimensions

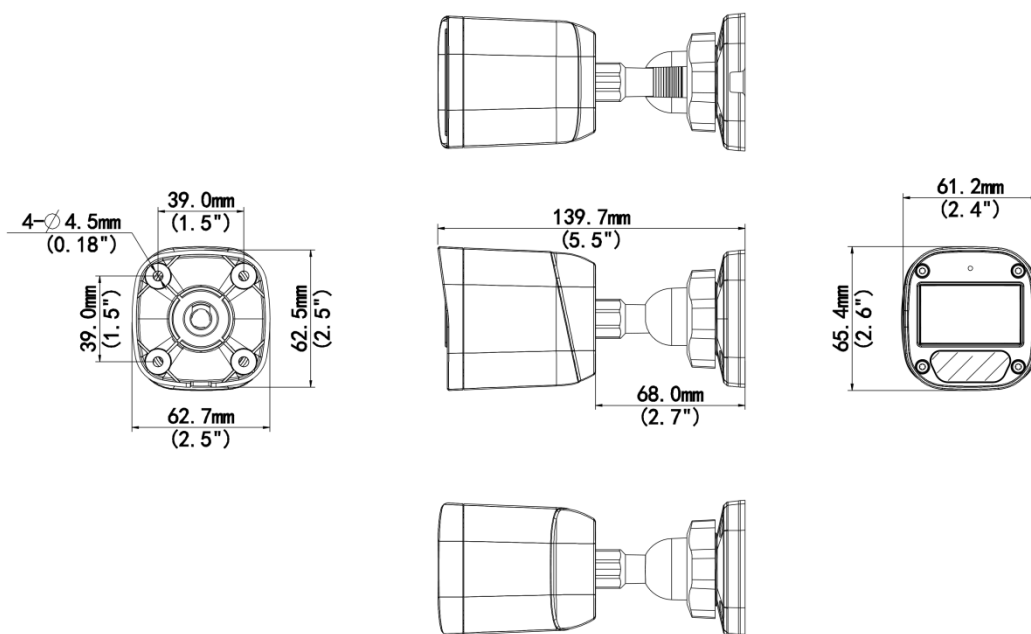

## Accessories

TR-JB05-A-IN

Small Bullet Junction Box(Support wiring from behind,Square)



TR-UP06-B-IN

Bullet Pole Mounting Bracket



TR-UP06-C-IN

Pole Mounting Bracket for Bullet Junction Box Only



TR-A01-IN

NPT 3/4" Waterproof Cable Gland



TR-UC08-C

Bullet&Dome Corner Mounting Bracket



PWR-DC1201A-UK

DC12V/1A Wall Plug British Standard Power Adapter



## PWR-DC1201B-UK

UNV DC12V/1A Wall Plug British Standard  
Power Adapter(Colorful Bag)



## PWR-DC1201A-US

DC12V/1A Wall Plug American Standard  
Power Adapter



## PWR-DC1201B-US

UNV DC12V/1A Wall Plug American  
Standard Power Adapter(Colorful Bag)



## PWR-DC1201A-EU

DC12V/1A Wall Plug European Standard  
Power Adapter



## PWR-DC1201B-EU

UNV DC12V/1A Wall Plug European  
Standard Power Adapter(Colorful Bag)



## PWR-DC1201A-IND

UNV DC12V/1A Wall Plug Indian Standard  
Power Adapter-Colorful Bag



### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.