

Infrared Strobe Light

LAPM-IS16@A-F-OS



Features


- Elegant appearance, integrated structure design, safety and convenient.
- Uses high-power LED warm light chip, warm and soft light source, glare-free, avoiding light pollution.
- Supports synchronous video illumination.
- Uniform illumination delivers clear image, no smearing or overexposure.
- Pulse signal self-test, no need for setup, automatic high-frequency illumination based on the digital pulse signal of the camera unit.
- Wide voltage allows AC 176V to 264V mains power supply.
- All-weather operation, applicable to harsh environments.
- IP66 protection level, waterproof and dustproof.

Specifications

Model	LAMP-IS16@A-F-OS
Structure	
Tail cable	1 x power input, 1 x strobe trigger input
Power	30W
Be in common use	
Weight	1.5 kg
Ingress protection	IP66
Bracket rotation angle	-90° to 90°
Dimensions (L×W×H)	1159×230×61mm
Power supply	200-240Vac 50/60Hz
LED strobe	
Trigger mode	Level trigger, switch trigger

Trigger frequency	100Hz
Beam angle	0-40%
White light flash	
White light flash lifetime	27000h@40°C

Dimensions

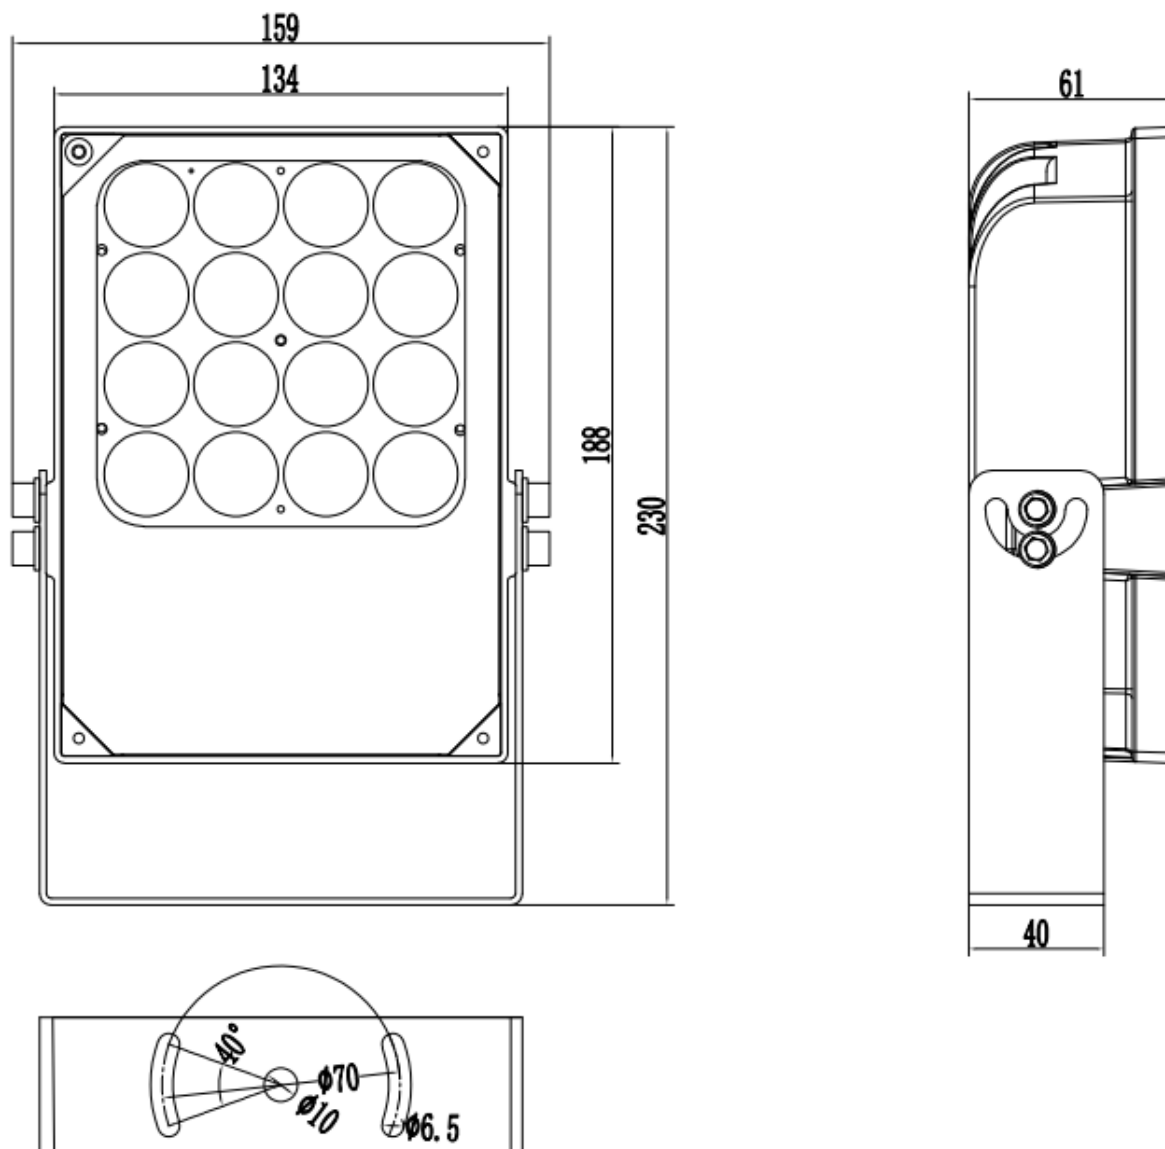

Accessories

TR-UP0627

Universal Pole Mounting Bracket(Element White,Diameter100-300mm,Domestic Version),Universal Type



Ordering Info

Product Model	Config	Description
LAMP-IS16	A-F-OS	Infrared Strobe Light (Overseas)

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.