
4MP OwlView Plus Tri-Guard 고정형 듀얼 라이트 터렛 네트워크 카메라

IPC3634SE-ADF28(40)KMC-WP-I1



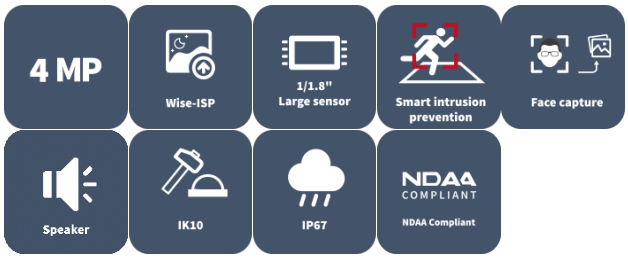

주요 특징

- 4MP, 1/1.8" CMOS 센서로 고화질 이미지 제공
- F1.0 대구경 렌즈 탑재
- 4 MP (2688 × 1520)@30/25(기본값) fps; 4 MP (2560 × 1440)@30/25 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG
- ColorHunter와 Wise-ISP 기술로 24시간 풀컬러 이미지 보장
- 지능형 외곽 보호: 크로스 라인, 침입, 구역 진입, 구역 이탈 감지 포함
- 대상 분류 기반 지능형 침입 방지 시스템으로 나뭇잎, 새, 조명에 의한 오경보를 크게 줄이고 사람, 차량, 비자동차에 정확히 집중
- 지능형 얼굴 캡처

- 지능형 피플 카운팅 및 군중 밀집도 모니터링
- 컬러 검색을 통한 스마트 침입 방지
- ASM(자동 장면 매칭)
- 130dB 트루 WDR 기술로 강한 조명 환경에서도 선명한 이미지 구현
- 9:16 복도 모드 지원
- 적색 및 청색 경고등 지원
- 알람 I/O: 1/1, 오디오 I/O: 1/1
- 내장 듀얼 마이크 및 스피커
- 스마트 IR, 최대 30m(98.4ft) IR 거리
- 화이트 라이트, 최대 30m(98.4ft) 웜 라이트 거리
- MicroSD, 최대 1TB 지원
- IK10 파손 방지
- NEMA 4X 및 IP67 보호 등급 지원

사양

Model	IPC3634SE-ADF28KMC-WP-I1	IPC3634SE-ADF40KMC-WP-I1
카메라		
최대 해상도	4 MP	
센서	1/1.8" CMOS	
최저 조도	Color: 0.0003 Lux (F1.0, AGC ON)	
주간/야간	IR-cut filter with auto switch (ICR)	
셔터	Auto/Manual, 1 to 1/100000 s	
조정 각도	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°	
S/N	> 56 dB	
WDR	130 dB	
렌즈		
초점 거리	2.8 mm	4.0 mm
Iris Type	Fixed	
아이리스	F1.0	
화각(수평)	111.0°	96.2°
화각(수직)	61.4°	52.6°
화각(사각)	133.0°	115.9°
렌즈 유형	Fixed	
DORI		
DORI 거리(렌즈)	2.8 mm	4 mm
DORI 거리(감지)	63.6 m (208.7 ft.)	77.6 m (254.5 ft.)
DORI 거리(관찰)	25.4 m (83.5 ft.)	31.0 m (101.8 ft.)


DORI 거리(인식)	12.7 m (41.7 ft.)	15.5 m (50.9 ft.)
DORI 거리(식별)	6.4 m (20.9 ft.)	7.8 m (25.4 ft.)
조명		
보조 조명	Dual light	
조명 거리(IR)	30 m (98.4 ft.)	
조명 거리(웜라이트)	30 m (98.4 ft.)	
IR 켜짐/꺼짐 컨트롤	Auto/Manual	
파장	850 nm	
조명 켜기/끄기 제어	Auto/Manual	
비디오		
비디오 압축	Ultra 265, H.265, H.264, MJPEG	
H.264 코드 프로파일	Baseline profile, Main profile, High profile	
프레임 속도 - 메인 스트림	4 MP (2688 × 1520), max. 30 fps; 4 MP (2560 × 1440), max. 30 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps;	
프레임 속도 - 서브 스트림	1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps	
프레임 속도 - 서드 스트림	D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps;	
비디오 비트 전송률	128 Kbps to 16 Mbps	
U-code	Support	
OSD	Up to 8 OSDs	
프라이버시 마스크	Up to 4 areas	
ROI	Support	
비디오 스트림	Triple streams	
이미지		
화이트 밸런스	Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2	

디지털 노이즈 제거	2D/3D DNR
스마트 조명	Support
자동 장면 매칭(ASM)	Support
이미지 회전	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
디워핑	N/A
HLC	Support
BLC	Support
디포그	Digital defog
지능형	
스마트 침입 방지	Cross line detection, intrusion detection, enter area detection, leave area detection (support false alarm filtering and the classification of human, non-motor vehicle and vehicle)
얼굴 캡처	Support
통계 분석	N/A
피플 카운팅	인원 흐름 계산 및 군중 밀도 모니터링 지원
속성 수집	SIP with color retrieval
이벤트	
기본 감지	Motion detection, Ultra motion detection, Tampering alarm, Audio detection, Object removed, Object Left Behind
기본 기능	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication, Alarm input, Alarm output
오디오	
오디오 압축	G.711U, G.711A, AAC-LC
오디오 비트레이트	G.711U/G.711A: 64 Kbps,AAC-LC: 128 Kbps
양방향 오디오	Support
억제	Support


샘플링 주파수	G.711U/G.711A: 8 KHzAAC-LC: 8 KHz, 16 KHz, 48 KHz
저장 장치	
엣지 스토리지	MicroSD, up to 1 TB
네트워크 스토리지	ANR, NAS (NFS)
네트워크	
프로토콜	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, SSL/TLS, SSH
호환성 통합	ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK
사용자/호스트	Up to 32 users. 3 user levels: administrator, common user and operator
고객	EZStation, APP
웹 브라우저	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+
인터페이스	
오디오 I/O	1 Input: impedance 35 kΩ, amplitude 2 V [p-p], 1 Output: impedance 600 Ω, amplitude 2 V [p-p]
알람 I/O	1/1
시리얼 포트	N/A
내장 마이크	Built-in dual-mic
내장 스피커	Support
WIFI	N/A
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
비디오 출력	N/A
인증	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4) FCC (FCC 47 CFR part15 B)
안전성	CE-LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)

환경	CE-RoHS (2011/65/EU ; (EU) 2015/863) ; WEEE (2012/19/EU)
보호	IP67 (IEC 60529) IK10 (IEC 62262) NEMA 4X
일반	
전원	DC 12 V±25%, PoE (IEEE 802.3af)
전력 소비량	Max. 7 W
전원 인터페이스	Ø5.5 mm coaxial power plug
크기	Ø128.7 mm × 110.3 mm (Ø5.1" × 4.3") (Ø × H)
무게	0.82 kg (1.81 lb.)
재료	Metal
작업 환경	-40 ℃ to 60 ℃ (-40 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
저장 환경	-40 ℃ to 60 ℃ (-40 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
서지 보호	4 KV
초기화 버튼	Support
웹 클라이언트 언어	20 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese

크기

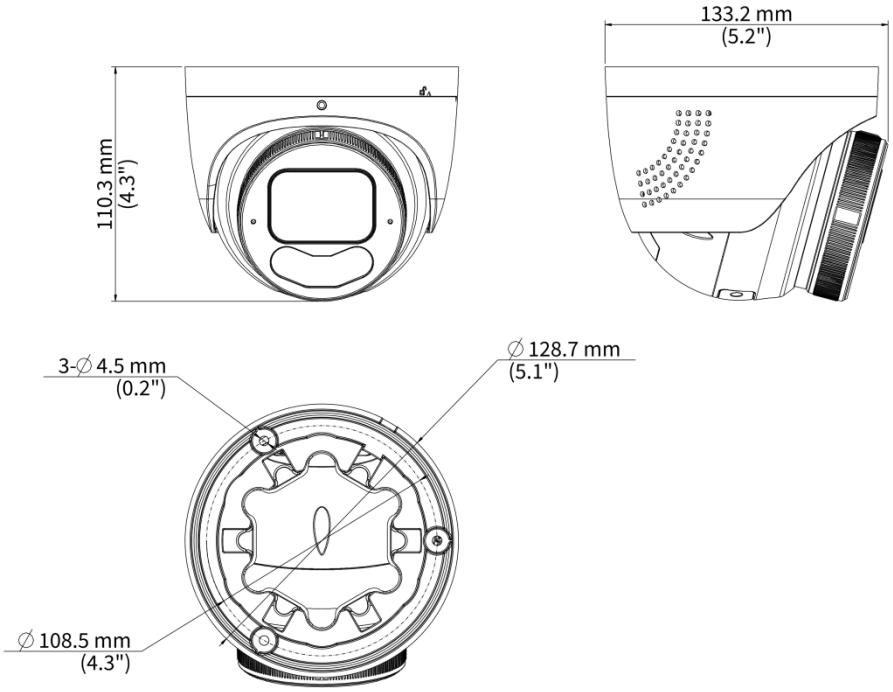

액세서리

TR-JB03-H-IN-V2	**TR-JB07/WM03-F-IN-V2**	**TR-WM03-B-IN-V2**
Turret Junction Box(Support Wiring From Behind)	Wall Mounting Assembling Bracket with Back Hole For 3 Inches Dome	3 Inches Dome Wall Mounting Assembling Bracket
		
TR-A01-IN	**TR-UC08-C-V2**	**TR-SE24-IN**
NPT 3/4'' Waterproof Cable Gland	Bullet&Dome Corner Mounting Bracket	Dome Pendent Mounting Pole 200mm
		

TR-CM24-IN	TR-SE24-A-IN	TR-JB03-J-IN
Dome Pendent Mounting Bracket(Indoor)	Dome Pendent Mounting Pole 500mm	Junction Box for Metal Turret Camera(Support wiring from behind)
		
TR-UP06-C-IN-V2		
Pole Mounting Bracket For Bullet Junction Box Only		
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2025-2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.