

Network Video Recorder NVR501-B-P Series



주요 특징

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Support HDMI and VGA simultaneous output
- Up to 16 Megapixels resolution recording
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


사양

| Model | NVR501-04B-P4 | NVR501-08B-P8 |
|---------------------------------|---|---|
| Decoding | | |
| Decoding Format | Ultra 265, H.265, H.264 | |
| Decoding Capability | Ultra 265/H.265: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30 H.264: 2 x 16MP(4800*2688)@30, 2 x 12MP@30, 2 x 4K@30, 4 x 5MP@30 | Ultra 265/H.265: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30 H.264: 2 x 16MP(4800*2688)@30, 2 x 12MP@30, 2 x 4K@30, 4 x 5MP@30, 6 x 4MP@30, 8 x 3MP@30 |
| Decoding Capability Description | The resolution of each channel cannot exceed 8192 pixels in length and 4096 pixels in width | |
| Audio Compression | G.711A, G.711U | |
| Network | | |
| Incoming Bandwidth | 80 Mbps | |
| Outgoing Bandwidth | 64 Mbps | |
| Remote Users | 128 | |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, RTSP, IPv6, IPv4 | |
| Browser (Plugin) | IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+ | |
| Video/Audio Input | | |
| IP Video Input | 4-ch | 8-ch |
| RCA Audio Input | 1-ch | |
| Video/Audio Output | | |
| HDMI Output | 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | |
| VGA Output | 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | |
| RCA Audio Output | 1-ch | |
| Liveview Display | 1/4 | 1/4/6/8/9 |
| Corridor Mode Screen | 3/4 | 3/4/5/7/9 |
| Two-way Audio | | |
| Two-way Audio | 1-ch, RCA (Using the audio input and output) | |
| Snapshot | | |
| FTP/Schedule/Event Snapshot | 4-ch snapshot (max. D1 (720 × 576) video resolution, with D1 snapshot resolution) | |
| Recording | | |
| Recording Resolution | 16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF | |
| Smart Function | | |
| Smart by IPC | Total 4-ch(Face Detection, SIP, UMD) | Total 8-ch(Face Detection, SIP, UMD) |
| VCA Search | Face Snapshot Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map | |

| | | |
|---------------------------------|---|--|
| Alarm | | |
| General Alarm | Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection | |
| Alert Alarm | IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal | |
| GUI Language | | |
| GUI Language | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian | |
| Hard Disk | | |
| SATA | 1 SATA Interface | |
| Capacity | Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.) | |
| External Interface | | |
| Network Interface | 1 RJ45 10 M/100 M self-adaptive Ethernet Interface | |
| USB | Rear panel: 1 × USB2.0, 1 × USB3.0 | |
| RS485 | N/A | |
| RS232 | N/A | |
| Alarm In | N/A | |
| Alarm Out | N/A | |
| Power Supply | DC 48 V/1.35 A | DC 52 V/1.8 A |
| PoE | | |
| PoE Interface | 4 RJ45 10 M/100 M self-adaptive Ethernet Interface | 8 RJ45 10 M/100 M self-adaptive Ethernet Interface |
| Max Power | Max 30 W for single port, Max 50 W in total | Max 30 W for single port, Max 75 W in total |
| Supported Standard | IEEE 802.3at, IEEE 802.3af | |
| Working Environment | | |
| Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) | |
| Working Humidity | ≤ 90% RH (non-condensing) | |
| Power Consumption (without HDD) | ≤ 10W | |
| Dimensions | | |
| Weight (without HDD) | ≤ 1.1Kg (2.43lb) | |
| Dimensions | 260mm × 222mm × 47mm (10.2"×8.7"×1.8") | |
| Certification | | |
| Certification | CE; FCC; UL; RoHS; WEEE | |
| CE | EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035 | |
| FCC | Part15 Subpart B | |

크기

Aggregate product size diagram using NVR501-04B-P4 as an example

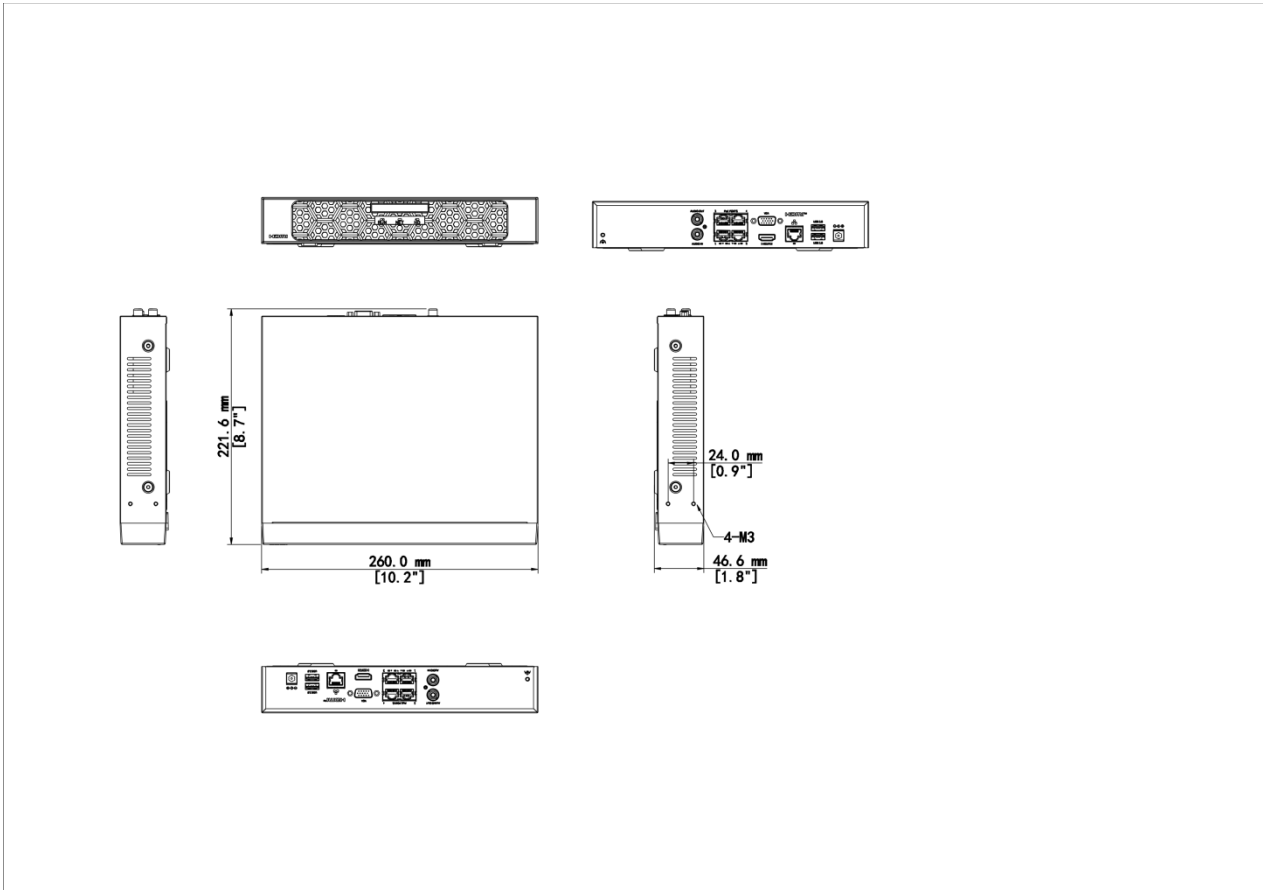

액세서리


RM-1U-260

1 HDD 1U NVR Rack Mount




Rear Panel

[NVR501-04B-P4]

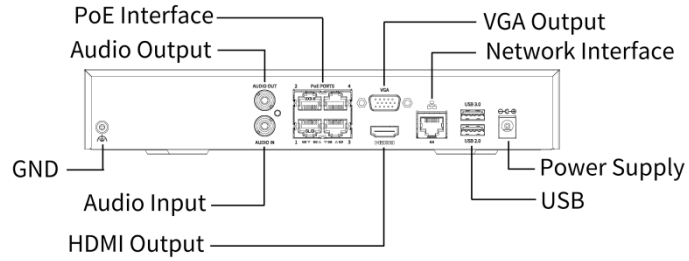

[NVR501-08B-P8]

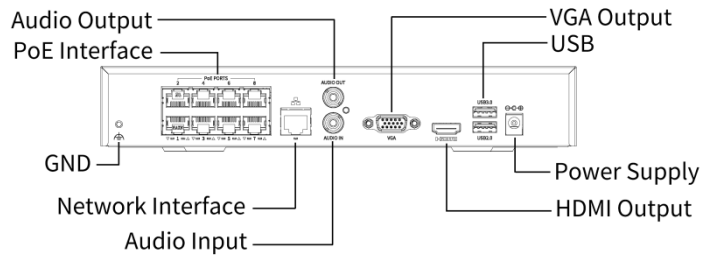

Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。