

Wall Mount Mifare Card Reader with Keypad OEC-R3H-MK



Overview

OEC-R3H-MK is a contactless RF IC card reader with a keypad. It features high receiving sensitivity and low working current, applicable to scenarios such as access control, attendance, etc.

Features

- Supports Wiegand/RS-485 data output.
- Built-in buzzer.
- Supports indoor and outdoor application.
- Stable, sensitive, and responsive.
- Supports ISO 14443-A and ISO 14443-B protocols.

Specifications

Model	оес-кзн-мк			
Hardware Specification				
Operating Frequency	13.56MHz			
Interface	Wiegand 26/34, RS485			
Material	PC			
Dimensions (L x W x H)	129*88*21mm			
Weight	145g			
Mount Method	115*73mm junction box, 86*86mm junction box			
Operating Temperature	-30°C to 65°C			
Operating Humidity	10% to 90%			
Storage Temperature	-40°C to 65°C			

1




Indicator	Steady blue: Normal operation; Steady green for 1s: Card authentication succeeded; Steady red for 1s: Card authentication failed		
Power Consumption	0.864W		
Operating Voltage	DC 12V ± 25%		
Operating Current	72mA		
Reading Distance	IC card: max. 5cm		
Authentication Mode	Card, password		
Protection Level	IP65		
Basic Business			
Reading Time	<1s		
Card Type	Mifare card		

Ordering Info

Product Model	Description	
OEC-R3H-MK	Wall Mounted Mifare Keyboard Card Reader	

Dimensions

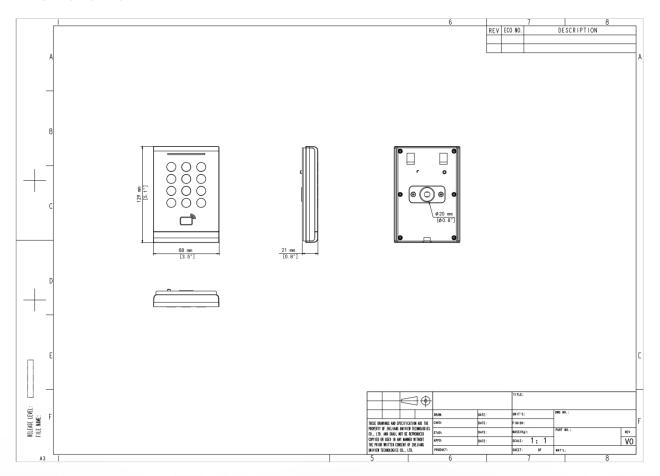



Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



http://www.uniview.com



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China



*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.

