## 4MP Fixed Dual light Turret Network Camera

# IPC3614LB-AF28-DL-ECO






## 주요 특징

- 고화질 이미지 (4 MP, 1/3.0" CMOS 센서 사용)
- 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- 스마트 듀얼 라이트로 고품질 이미지 보장
- Ultra 265, H.265, H.264
- 2D/3D DNR (디지털 노이즈 감소)
- ROI (관심 영역)는 낮은 대역폭으로 관심 영역의 이미지 품질을 보장합니다.
- 3-axis
- 내장 마이크
- 넓은 온도 범위: -30℃~60℃ (-22℉~140℉)
- PoE 전원 공급 지원
- IP67

# 사양

| Model | IPC3614LB-AF28-DL-ECO |
|---|---|
| 카메라 | |
| 최대 해상도 | 4 MP |
| 센서 | 1/3.0" CMOS |
| 최저 조도 | 컬러: 0.003 Lux (F1.6, AGC 켜짐), 조명 사용 시 0 Lux |
| 주간/야간 | 자동 스위치 (ICR) 가 있는 IR 차단 필터 |
| 셔터 | 자동/수동, 1초 ~ 1/100000초 |
| 조정 각도 | 팬: 0° ~ 360°, 틸트: 0° ~ 80°, 회전: 0° ~ 360° |
| S/N | > 52 dB |
| WDR | DWDR |
| 렌즈 | |
| 초점 거리 | 2.8 mm |
| Iris | F1.6 |
| 화각(수평) | 93.2 ° |
| 화각(수직) | 51.5° |
| 화각(사각) | 108° |
| 렌즈 타입 | 고정 |
| Iris Type | 고정 |
| DORI | |
| DORI 거리(렌즈) | 2.8 mm |
| DORI 거리(감지) | 63.0 m (206.7 ft.) |
| DORI 거리(관찰) | 25.2 m (82.7 ft.) |


| | |
|---|---|
| DORI 거리(인식) | 12.6 m (41.3 ft.) |
| DORI 거리(식별) | 6.3 m (20.7 ft.) |
| 조명 | |
| 조명 거리(IR) | 30 m (98.4 ft.) |
| 조명 거리(웜라이트) | 15 m (49.2 ft.) |
| 조명 켜기/끄기 제어 | 자동/수동 |
| 파장 | 850 nm |
| IR 켜짐/꺼짐 컨트롤 | 자동/수동 |
| 보조 조명 | 듀얼 라이트 |
| 비디오 | |
| 비디오 압축 | Ultra 265, H.265, H.264 |
| H.264 코드 프로파일 | 기본 프로필, 주요 프로필, 높은 프로필 |
| 프레임 속도 | 메인 스트림: 4 MP (2560 × 1440), 최대 25 fps; 3 MP (2304 × 1296), 최대 30 fps; 1080P (1920 × 1080), 최대 30 fps<br>서브 스트림: 640 × 360, 최대 30 fps; 2CIF (704 × 288), 최대 30 fps; CIF (352 × 288), 최대 30 fps |
| 비디오 비트 전송률 | 128 Kbps ~ 6144 Kbps |
| U-code | 지원 |
| OSD | 최대 4개의 OSD |
| 프라이버시 마스크 | 최대 4개 영역 |
| ROI | 지원 |
| 비디오 스트림 | 듀얼 스트림 |

| | |
|---|---|
| 이미지 | |
| 스마트 조명 | 지원 |
| 스마트 IR | 지원 |
| 화이트 밸런스 | 자동, 야외, 미세 조정, 나트륨등, 잠김, 자동2, 영역 화이트 밸런스 |
| 디지털 노이즈 제거 | 2D/3D DNR |
| 이미지 회전 | 보통, 수직 반전, 수평 반전, 180° |
| 디워핑 | N/A |
| HLC | 지원 |
| BLC | 지원 |
| 디포그 | 디지털 디포그 |
| 이미지 안정화 | N/A |
| 이벤트 | |
| 기본 감지 | 움직임 감지, 오디오 감지, 인체 감지 2.0 |
| 기본 기능 | 워터마크, IP 주소 필터링, 액세스 정책, ARP 보호, RTSP 인증, 사용자 인증, HTTP 인증 |
| 오디오 | |
| 오디오 압축 | G.711U, G.711A |
| 오디오 비트레이트 | 64 Kbps |
| 양방향 오디오 | N/A |
| 억제 | 지원 |
| 샘플링 레이트 | 8 kHz |
| 저장 장치 | |

| | |
|---|---|
| 엣지 스토리지 | N/A |
| 네트워크 | |
| 프로토콜 | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, DNS, DDNS, NTP, UPnP, HTTP, QoS, RTCP, RTMP, HTTPS |
| 호환성 통합 | SDK, API |
| 고객 | EZStation, APP |
| 웹 브라우저 | 플러그인 필요 라이브 뷰: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, 플러그인 불필요<br>라이브 뷰: Chrome 57+, Firefox 58+, Edge 16+ |
| 보안 | Password Protection, 강력한 비밀번호, Export Operation Logs, RTSP용 기본 및 다이제스트 인증, HTTP용 다이제스트 인증, ONVIF용 WSSE 및 다이제스트 인증 |
| 사용자/호스트 | 최대 32명 사용자. 사용자 레벨 3단계: 관리자, 일반 사용자, 운영자 |
| 인터페이스 | |
| 오디오 I/O | N/A |
| 알람 I/O | N/A |
| 시리얼 포트 | N/A |
| 내장 마이크 | 지원 |
| 내장 스피커 | N/A |
| WIFI | N/A |
| 네트워크 | 1 × RJ45 10 M/100 M Base-TX Ethernet |
| 비디오 출력 | N/A |
| 인증 | |
| 보호 | IP67 (IEC 60529) |
| EMC | CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4)<br>FCC (FCC 47 CFR part15 B) |


| | |
|---|---|
| 안전성 | CE LVD (EN 62368-1) |
| 환경 | CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); |
| 일반 | |
| 전원 | PoE (IEEE 802.3af) |
| 전력 소비량 | 최대 3.1 W |
| 전원 인터페이스 | N/A |
| 크기 | Ø117.8 mm × 100.1 mm (Ø4.6" × 3.9") (Ø × H) |
| 무게 | 0.23 kg (0.51 lb.) |
| 재료 | 그래핀 + 플라스틱 |
| 작업 환경 | -30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결) |
| 저장 환경 | -30 ℃ ~ 60 ℃ (-22 ℉ ~ 140 ℉), 습도: ≤ 95% RH (비응결) |
| 서지 보호 | 4 KV |
| 초기화 버튼 | N/A |
| 웹 클라이언트 언어 | 4개 언어: 영어, 러시아어, 스페인어, 베트남어 |

# 크기

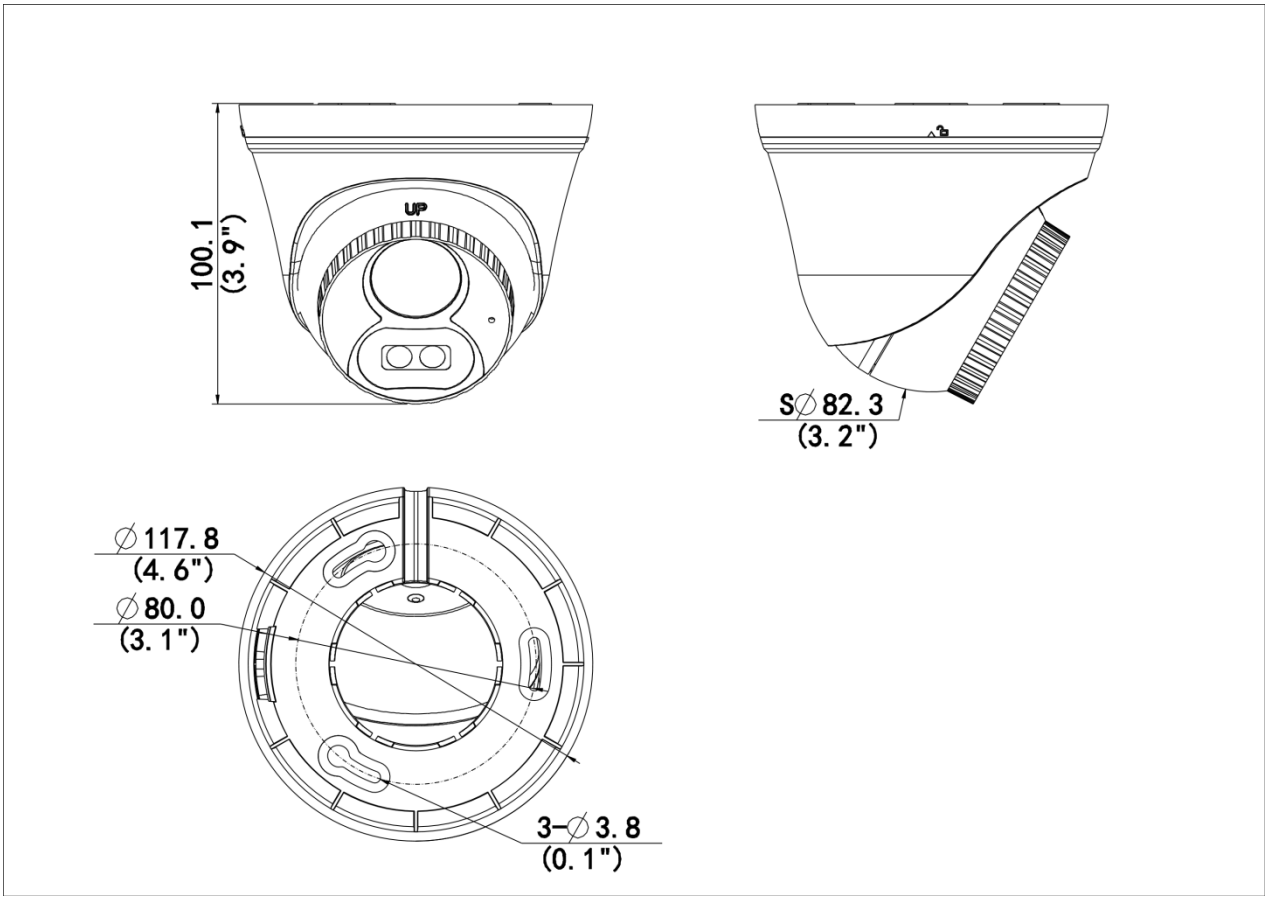


# 액세서리

| | | |
|---|---|---|
| **TR-JB03-I-IN**<br>Junction Box for Turret Camera(Support wiring from behind) | **TR-A01-IN**<br>NPT 3/4'' Waterproof Cable Gland | **TR-SE24-IN**<br>Dome Pendent Mounting Pole 200mm |
|  |  |  |
| **TR-SE24-A-IN**<br>Dome Pendent Mounting Pole 500mm | **TR-CM24-IN**<br>Dome Pendent Mounting Bracket(Indoor) | **TR-JB07/WM03-G-IN-V2**<br>Wall Mounting Assembling Bracket For 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera |
|  |  |  |

| TR-WM03-D-IN-V2 | TR-UC08-C-V2 | TR-UP06-C-IN-V2 |
| --- | --- | --- |
| Wall Mounting Bracket for 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera | Bullet&Dome Corner Mounting Bracket | Pole Mounting Bracket for Bullet Junction Box Only |
|  |  |  |

# Unlimited New View

**Zhejiang Uniview Technologies Co., Ltd.**

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.