


5MP WDR LightHunter IR Network Bullet Camera IPC2225SB-ADF28KM-I1

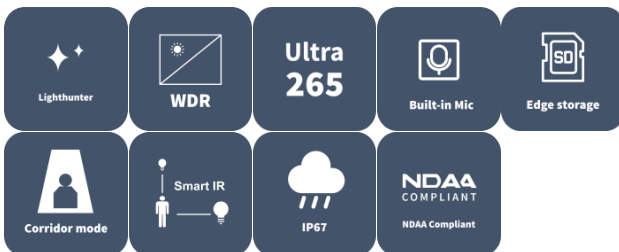

주요 특징

- 고품질 이미지 (5 MP, 1/2.7" CMOS 센서 사용)
- 메인 스트림에서 2880 × 1620@30 fps
- Ultra 265, H.265, H.264, MJPEG
- 스마트 침입 방지, 인체 및 차량 감지를 기반으로 크로스 라인 및 침입 지원
- 저조도 환경에서도 초고화질 이미지를 보장하는 LightHunter 기술
- 9:16 복도 모드 지원
- 최대 120 dB 의 광학 WDR (광역 역광 보정)
- 스마트 IR, 최대 80 m (262.5 ft.) IR 범위 지원
- DC 12 V, PoE (IEEE 802.3af) 전원 공급 장치
- Alarm I/O: 1/1, audio I/O: 1/1

- 내장 마이크
- IP67, IK10

사양


Model	IPC2225SB-ADF28KM-I1
카메라	
센서	1/2.7" CMOS
최저 조도	Color: 0.003 Lux (F1.6, AGC ON), 0 Lux with IR
주간/야간	IR-cut filter with auto switch (ICR)
셔터	Auto/Manual, 1 to 1/100000 s
WDR	120 dB
조정 각도	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°
S/N	>56 dB
렌즈	
초점 거리	2.8 mm
Iris	F1.6
화각(수평)	108.5°
화각(수직)	57.9°
화각(사각)	141.1°
Iris Type	Fixed
DORI	
DORI 거리(렌즈)	2.8 mm
DORI 거리(감지)	63.0 m (206.7 ft.)
DORI 거리(관찰)	25.2 m (82.7 ft.)
DORI 거리(인식)	12.6 m (41.3 ft.)

DORI 거리(식별)	6.3 m (20.7 ft.)
조명	
조명 거리(IR)	80 m (262.5 ft.)
IR 켜짐/꺼짐 컨트롤	Auto/Manual
파장	850 nm
비디오	
프라이버시 마스크	Up to 4 areas per scene
프레임 속도 - 메인 스트림	5 MP (2880 × 1620), max. 30 fps
프레임 속도 - 서브 스트림	720P (1280 × 720), max. 30 fps
비디오 압축	Ultra 265, H.265, H.264, MJPEG
비디오 비트 레이트	128 Kbps to 16 Mbps
ROI	Support
비디오 스트림	Dual streams
OSD	Up to 4 OSDs
이미지	
디포그	Digital defog
화이트 밸런스	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
디지털 노이즈 제거	2D/3D DNR
스마트 IR	Support
이미지 회전	Normal, Flip Vertical, Flip Horizontal, 180°, 90°Clockwise, 90°Anti-clockwise
HLC	Support
BLC	Support
열파 감소	N/A

지능형	
스마트 침입 방지	Cross line detection, intrusion detection (support false alarm filtering and the classification of human and vehicle)
이벤트	
기본 감지	Motion detection, Ultra motion detection (based on human body and vehicle detection), Tampering alarm, Audio detection
기본 기능	Watermark, IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication, HTTP authentication, Alarm input, Alarm output
오디오	
오디오 압축	G.711U, G.711A
오디오 비트레이트	128 Kbps
양방향 오디오	Support
억제	Support
샘플링 레이트	16KHZ
저장 장치	
엣지 스토리지	MicroSD, up to 512 GB
네트워크 스토리지	ANR, NAS (NFS)
네트워크	
프로토콜	SSH, IGMP, RTP, RTCP, SMTP, IPv4, IPv6, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTSP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, 802.1x, SNMP, QoS, SSL/TLS
호환 통합	ONVIF (Profile S, Profile G, Profile T, Profile M), SDK, API
사용자/호스트	Up to 32 users. 3 user levels: administrator, common user and operator
보안	TLS 1.3, Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
클라이언트	EZStation, UNV-Link, UNV-Link Pro
웹 브라우저	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+

인터페이스	
오디오 I/O	1 Input: impedance 1 kΩ, amplitude 2.5 V [p-p], 1 Output: impedance 600 Ω, amplitude 2.5 V [p-p]
알람 I/O	1/1
내장 마이크	Support
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
인증	
EMC	CE-EMC (EN 55032: 2015+A1:2020,EN 61000-3-3: 2013+A1: 2019,EN IEC 61000-3-2: 2019+A1: 2021,EN 55035: 2017+A11:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)
안전성	CE LVD (EN 62368-1:2014+A11:2017) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
환경	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
보호	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013) IK10 (IEC 62262:2002)
일반	
전원	DC 12 V (±25%), PoE (IEEE 802.3af)
전력 소비량	Max. 8 W
전원 인터페이스	Ø5.5 mm coaxial power plug
크기	245 mm × 87 mm × 86 mm (9.6" × 3.4" × 3.4") (L × W × H)
무게	0.82 kg (1.81 lb.)
작업 환경	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: 5%~95% RH (non-condensing)
저장 환경	-40°C ~ 70°C (-40°F ~ 158°F), Humidity: 5%~95% RH (non-condensing)
웹 클라이언트 언어	22 Languages: Traditional Chinese, English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese (Europe), Portuguese (Brazil), Japanese, Thai, Turkish, Spanish (Latin America), Spanish (Europe), Hungarian, Italian, Vietnamese, Arabic, Slovak
Configurable	
P/N	Support

크기

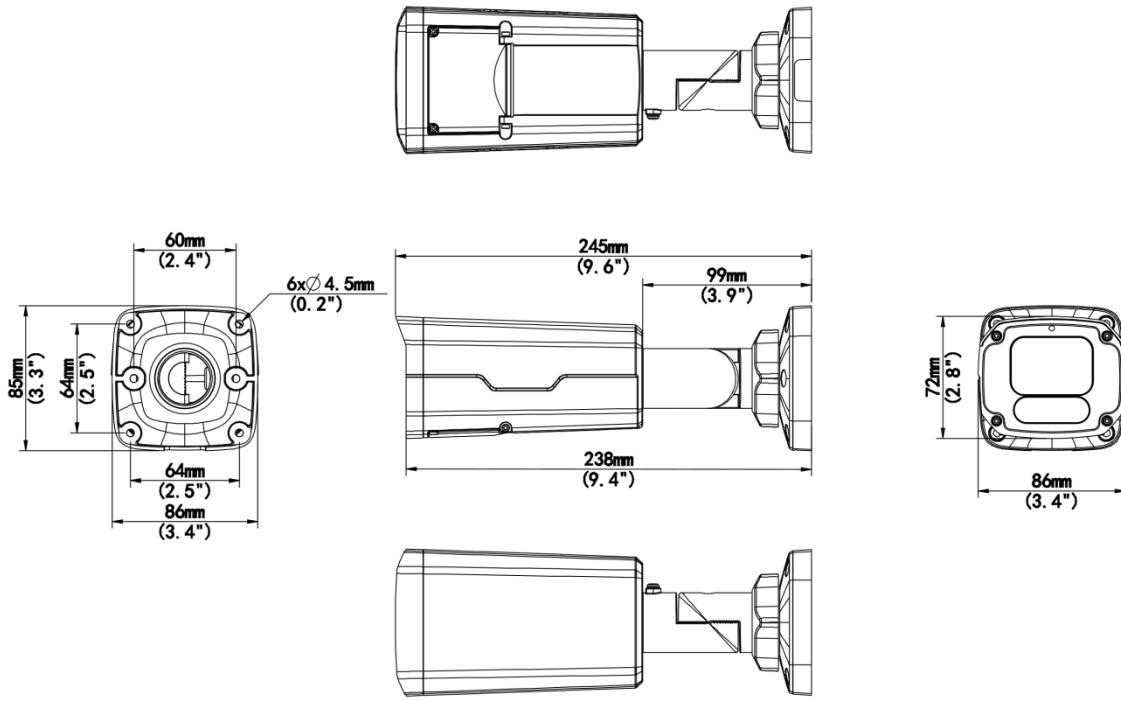

액세서리

TR-JB07-D-IN

Bullet Junction Box(Support wiring from behind)



TR-A01-IN

NPT 3/4" Waterproof Cable Gland



TR-JB06-A-IN

Middle Bullet Junction Box(Elegant White)



TR-UP06-C-IN-V2

Pole Mounting Bracket for Bullet Junction Box Only



TR-UP06-B-IN

Bullet Pole Mounting Bracket



Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。