

Digital Video Recorder XVR301-04/08U3



Features

- Support Ultra 265/H.265/H.264 video formats
- Support audio over coaxial cable (TVI cameras)
- Control the dual-light of UNV analog cameras under TVI
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160)
- HDMI and VGA simultaneous output
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols


Specifications

| Model | XVR301-04U3 | XVR301-08U3 |
|-------------------------------|--|------------------------|
| Video/Audio Input | | |
| IP Video Input | 4-ch | 8-ch |
| Analog Video Input | 4-ch, BNC | 8-ch, BNC |
| Max IP Video Input | 8-ch | 16-ch |
| Supported Analog Camera Types | Support AHD input: 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps Support TVI input: 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps Support CVI input: 8MP@15fps 5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps Support CVBS input | |
| BNC Audio Input | 4-ch, channel audio | 8-ch, channel audio |
| RCA Audio Input | 1-ch | |
| Video/Audio Output | | |
| HDMI Output | HDMI: 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | |
| VGA Output | VGA: 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz | |
| BNC Video Output | 1-ch | |
| RCA Audio Output | 1-ch | |
| Live View Display | HDMI/VGA: 1/4/6/8/9 | HDMI/VGA: 1/4/6/8/9/16 |
| Playback Screen | 1/4 | 1/4/9/16 |
| Encoding/Decoding | | |
| Recording Resolution | 8MP/5MP/4MP/1080P/720P/D1 | |
| Recording Frame Rate | Main stream: 8MP@8fps Sub stream: D1@8fps Main stream: 5MP@12fps Sub stream: D1@12fps | |

| | | |
|-------------------------------------|---|--|
| | Main stream: 4MP@15fps Sub stream: D1@15fps Main stream: 1080P@25fps Sub stream: D1@25fps Main stream: 720P@30fps Sub stream: D1@30fps | |
| Audio Sample Rate | 8 kHz, 16 bit per channel | |
| Audio Bit Rate | 64 Kbps per channel | |
| Decoding Capability | Analog: 4 x 8MP @8, 4 x 5MP @12, 4 x 4MP @15, 4 x 1080P@25, 4 x 720@30 IP: 1 x 8MP@30, 2 x 4MP@30, 4 x 1080P@30, 8 x 720P@30 | Analog: 8 x 8MP @8, 8 x 5MP @12, 8 x 4MP @15, 8 x 1080P@25, 8 x 720@30 IP: 2 x 8MP@30, 4 x 4MP@30, 8 x 1080P@30, 16 x 720P@30 |
| Num of Concurrent Playback in Local | 8-ch | 16-ch |
| Coaxial Cable | | |
| Audio over Coaxial Cable(Form) | 4-ch, One-way Audio(TVI UNV)/One-way Audio(CVI UNV) | 8-ch, One-way Audio(TVI UNV)/One-way Audio(CVI UNV) |
| Two-way Audio | | |
| Two-way Audio | 1-ch, RCA (Using the audio input and output) | |
| Analog Snapshot | | |
| FTP/Schedule/Event Snapshot | Schedule/FTP/Event snapshot:4-ch snapshot, up to 704*576 resolution | Schedule/FTP/Event snapshot:8-ch snapshot, up to 704*576 resolution |
| Network | | |
| Incoming Bandwidth | 40Mbps (Up to 48Mbps after all analog channel conversion) | 80Mbps (Up to 96 Mbps after all analog channel conversion) |
| Outgoing Bandwidth | 64Mbps | 160Mbps |
| Remote Users | 128 | |
| Protocols | TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP | |
| Browser(Plugin) | IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+ | |
| Smart | | |
| Analog Smart by XVR | Ultra Motion Detection (UMD) SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area) Face Detection | Ultra Motion Detection (UMD) SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area) |
| IP Smart by IPC | Face Detection, SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Defocus Detection, Scene Change Detection, Object Removed, Object Left Behind, Auto Tracking | |
| VCA Search | Face Search, Behavior Search | |
| Smart Functions by XVR | 4-ch (UMD) 2-ch (SIP) 1-ch (Face Detection) | 8-ch (UMD) 4-ch (SIP) |
| Smart Functions by IP Camera | 2-ch (SIP) | 4-ch (SIP) |
| Alarm | | |
| General Alarm | Motion | |
| Alert Alarm | IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal | |
| GUI Language | | |

| | | |
|---------------------------------|---|---|
| GUI Language | 38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian | |
| Hard Disk | | |
| SATA | 1 SATA interface | |
| Capacity | Up to 16 TB for each HDD (The maximum HDD capacity varies with environment temperature) | |
| External Interface | | |
| Network Interface | 1 RJ45 10 M/100 M self-adaptive Ethernet Interface | 1 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface |
| USB | Rear panel: 2 × USB2.0 | Rear panel: 1 × USB2.0, 1 × USB3.0 |
| RS485 | 1 | |
| RS232 | N/A | |
| Alarm In | 4-ch | |
| Alarm Out | 1-ch | |
| Power Supply | DC 12 V/2 A | |
| Working Environment | | |
| Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) | |
| Working Humidity | ≤ 90% RH (non-condensing) | |
| Power Consumption (without HDD) | ≤ 10W | ≤ 12W |
| Dimensions | | |
| Weight (without HDD) | ≤1.1 Kg (2.42lb) | ≤1.2 Kg (2.65lb) |
| Dimensions | 260mm ×251mm× 46mm (10.2" × 9.9"×1.8") | |
| Certification | | |
| Certification | CE, FCC, UL, RoHS, WEEE | |
| CE | EN 55032, EN 61000-3-3, EN IEC 61000-3-2 | |
| FCC | Part15 Subpart B | |

Dimensions

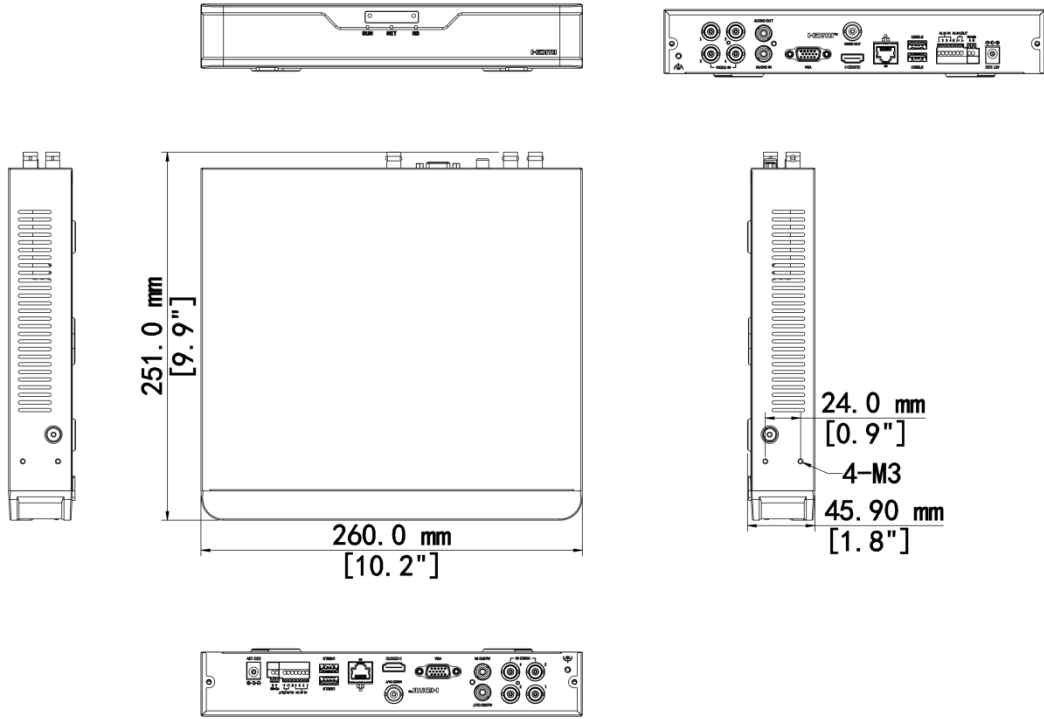

Accessories


RM-1U-260

1 HDD 1U NVR Rack Mount




Rear Panel

[XVR301-08U3]

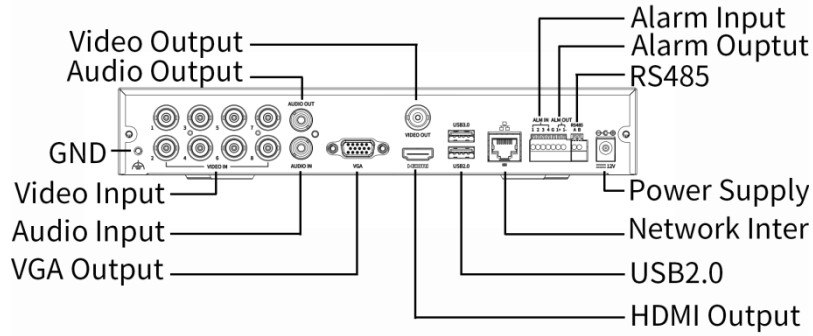

[XVR301-04U3]

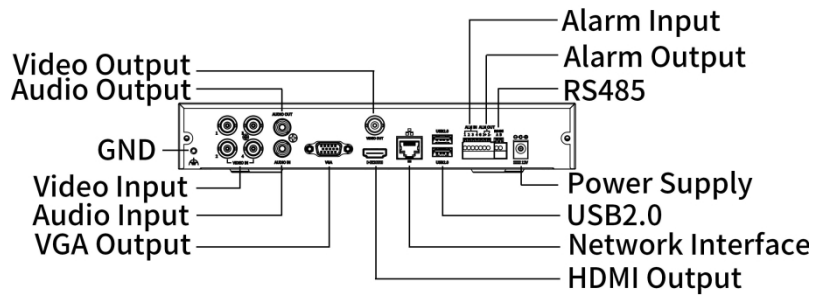

Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。