
4MP HD IR VF 돔 네트워크 카메라

IPC3534LP-ADEZK-DI



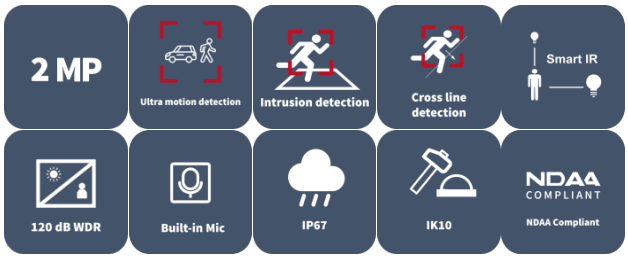

주요 특징

- 4MP, 1/3.0" CMOS 센서로 고화질 이미지 제공
- 4 MP (2688 × 1520)@25/20 fps; 4 MP (2560 × 1440)@25/20 fps; 3 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG (서브 스트림 전용)
- 스마트 침입 방지: 크로스 라인, 침입 감지(인체 감지 기반) 포함
- Ultra 모션 감지(사람/차량 감지) 지원
- 120dB 트루 WDR 기술로 강한 조명 환경에서도 선명한 이미지 구현
- 내장 마이크
- 9:16 복도 모드 지원
- 스마트 IR, 최대 40m(131.2ft) IR 거리

- MicroSD, 최대 512GB 지원
- IK10 파손 방지
- IP67

사양

Model	IPC3534LP-ADEZK-DI
카메라	
최대 해상도	4 MP
센서	1/3.0" CMOS
최저 조도	Color: 0.002 Lux (F1.6, AGC ON), 0 Lux with IR on
주간/야간	IR-cut filter with auto switch (ICR)
셔터	Auto/Manual, 1 to 1/100000 s
조정 각도	Pan: 3° to 360°, Tilt: 0° to 70°, Rotate: 3° to 360°
S/N	> 52 dB
WDR	120 dB
렌즈	
초점 거리	2.8 to 12 mm
아이리스	F1.6
화각(수평)	95.6° to 30.9°
화각(수직)	52.0° to 17.6°
화각(사각)	112.2° to 33.7°
렌즈 유형	Motorized
Iris Type	Auto Iris
DORI	
DORI 거리(렌즈)	2.8 to 12 mm


DORI 거리(감지)	63 m to 270 m (206.6 ft. to 885.6 ft.)
DORI 거리(관찰)	25.2 m to 108.0 m (82.7 ft. to 354.2 ft.)
DORI 거리(인식)	12.6 m to 43.2 m (41.3 ft. to 141.7 ft.)
DORI 거리(식별)	6.3 m to 27.0 m (20.7 ft. to 88.6 ft.
조명	
조명 거리(IR)	40 m (131.2 ft.)
파장	850 nm
IR 켜짐/꺼짐 컨트롤	Auto/Manual
비디오	
비디오 압축	Ultra 265, H.265, H.264, MJPEG (Sub Stream Only)
H.264 코드 프로파일	Baseline profile, Main profile, High profile
프레임 속도	Main Stream: 4 MP (2688 × 1520), max. 25 fps; 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; 720P (1280 × 720), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 360, max. 30 fps; 2CIF (704 × 288), max. 30 fps; CIF (352 × 288), max. 30 fps;
비디오 비트 전송률	128 Kbps to 6144 Kbps
U-code	Support
OSD	Up to 4 OSDs
프라이버시 마스크	Up to 4 areas
ROI	Support
비디오 스트림	Dual streams
이미지	
화이트 밸런스	Auto, Outdoor, Fine tune, Sodium lamp, Locked, Auto2, Area white balance
디지털 노이즈 제거	2D/3D DNR
스마트 IR	Support

이미지 회전	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
디워핑	N/A
HLC	Support
BLC	Support
디포그	Digital defog
이벤트	
기본 감지	Motion detection, Ultra motion detection (human/ vehicle detection) , Tampering alarm, Audio detection, Cross line (based on human body detection), Intrusion (based on human body detection)
기본 기능	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
오디오	
오디오 압축	G.711U, G.711A, AAC-LC
오디오 비트레이트	G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps
양방향 오디오	지원
억제	Support
샘플링 주파수	G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz
저장 장치	
엣지 스토리지	MicroSD, up to 512 GB
네트워크 스토리지	ANR, NAS (NFS)
네트워크	
프로토콜	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, QoS, SNMP, PPPoE, RTCP, RTMP, 802.1x, SSH
호환성 통합	ONVIF (Profile S, Profile G, Profile T), API, SDK
사용자/호스트	Up to 32 users. 3 user levels: administrator, common user and operator
보안	Password protection, Strong Password, HTTPS encryption, Export operation logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest

	Authentication for ONVIF
고객	EZStation, APP
웹 브라우저	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+
인터페이스	
오디오 I/O	1 Input: impedance 35 kΩ, amplitude 2 V [p-p], 1 Output: impedance 600 Ω, amplitude 2 V [p-p]
알람 I/O	1/1
시리얼 포트	N/A
내장 마이크	Support
내장 스피커	N/A
WIFI	N/A
네트워크	1 × RJ45 10 M/100 M Base-TX Ethernet
비디오 출력	N/A
인증	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130-4) FCC (FCC 47 CFR part15 B)
안전성	CE-LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
환경	CE-RoHS (2011/65/EU ; (EU) 2015/863) ; WEEE (2012/19/EU)
보호	IP67 (IEC 60529) IK10 (IEC 62262)
일반	
전원	DC 12 V±25%, PoE (IEEE 802.3af)
전력 소비량	Max. 6.5 W
전원 인터페이스	Ø5.5 mm coaxial power plug
크기	Ø128.2 mm × 99.9 mm (Ø5.0" × 3.9") (Ø × H)

무게	0.66 kg (1.46 lb.)
재료	Metal
작업 환경	-30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
저장 환경	-30 ℃ to 60 ℃ (-22 ℉ to 140 ℉), Humidity: ≤ 95% RH (non-condensing)
서지 보호	4 KV
초기화 버튼	Support
RTC	Support
웹 클라이언트 언어	14 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian, Turkish

크기

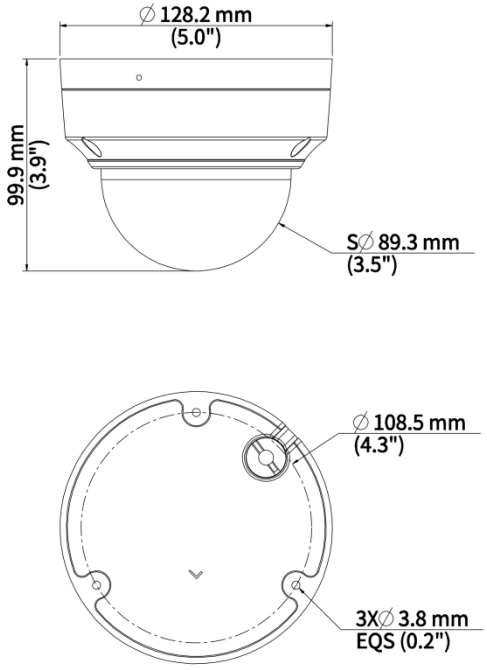

액세서리

TR-JB03-H-IN-V2 Turret Junction Box(Support Wiring From Behind)	**TR-A01-IN** NPT 3/4'' Waterproof Cable Gland	**TR-SE24-IN** Dome Pendent Mounting Pole 200mm
		
TR-SE24-A-IN Dome Pendent Mounting Pole 500mm	**TR-CM24-IN** Dome Pendent Mounting Bracket(Indoor)	**TR-UC08-C-V2** Bullet&Dome Corner Mounting Bracket
		
TR-JB07/WM03-F-IN-V2 Wall Mounting Assembling Bracket with Back Hole For 3 Inches Dome	**TR-WM03-B-IN-V2** 3 Inches Dome Wall Mounting Assembling Bracket	**HS-207S** VF Dome Sunshade Shell
		
TR-UP06-C-IN-V2 Pole Mounting Bracket For Bullet Junction Box Only		
		

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.

http://www.uniview.com

overseasbusiness@uniview.com; globalsupport@uniview.com

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

©2026 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
© 2022 Zhejiang Uniview Technologies Co., Ltd. 무단 전재 및 재배포 금지. *제품 사양 및 재고는 사전 예고 없이 변경될 수 있습니다.